

OA254 Series 850 cfm



254 x 89mm
(10.0" x 3.5")




finger guard: G254-10P

FRAME
Diecast Aluminum

IMPELLER
PBT, UL94V-0 Thermoplastic

POWER CONNECTION
2x lead wires 300mm (12")
or terminals

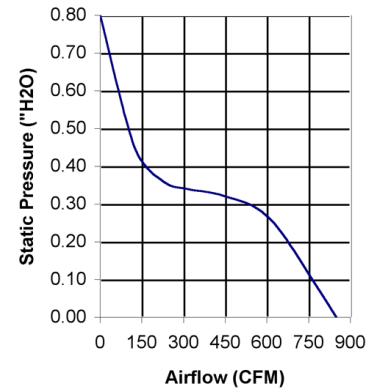

MODEL NUMBER	SPEED (RPM)	AIRFLOW (CFM)	NOISE (dB)	VOLTS AC	VOLTAGE RANGE	WATTS	MAX. STATIC PRESSURE (H ₂ O)
OA254AN-11-1 * XC	3000	850	65	120	100~125	70	.80
OA254AN-22-1 * XC	3000	850	65	230	200~240	70	.80

* Indicate "TB" (Terminal Ball Bearing), "WB" (12" Wire Leads, Ball Bearing)

MOTOR



High performance capacitor drive, Impedance and polarity protected

DIELECTRIC STRENGTH

1 minute @ 1500VAC, 50/60Hz

LIFE EXPECTANCY

Ball Bearing
60,000 hours (L10 at 40C)

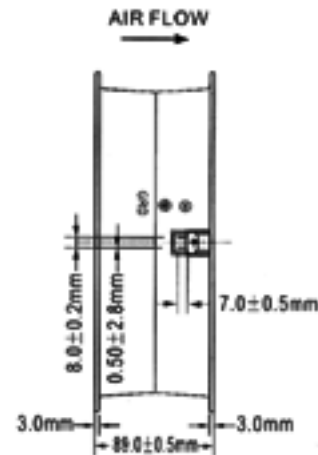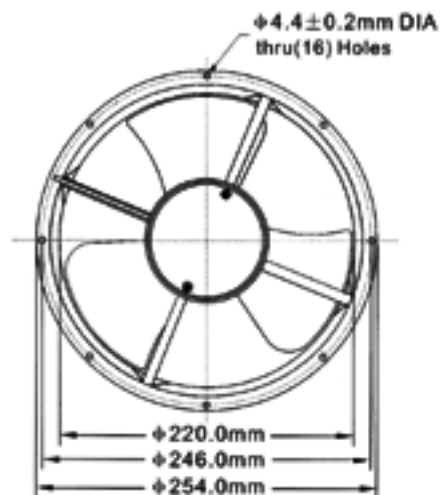

OPERATING TEMPERATURE

Ball Bearing
-20C ~ +80C

Drawing for dimensional reference only.