


## COMPACT PC BOARD POWER RELAY

## JW RELAYS



mm inch

### FEATURES

- Miniature package with universal terminal footprint
- High dielectric withstanding for transient protection:  
10,000 V surge in  $\mu\text{s}$  between coil and contact
- Sealed construction
- Class B coil insulation types available
- TV rated (TV-5) types available (only for 1 Form A type)
- VDE, TÜV, SEMKO, SEV, FIMKO, TV-5 also approved

### About Cd-free contacts

We have introduced cadmium-free type products to reduce environmentally hazardous substances. Please replace parts that contain cadmium with Cd-free products. Evaluate them with your actual application before use because the life of a relay depends on the contact material and load.

**Note:** Add the suffix "F" to the part number for the 1 Form A contact type. The 1 Form C, 2 Form A and 2 Form C contact types were originally Cd-free, hence the suffix "F" is not required.

## SPECIFICATIONS

### Contact

		Standard type	High capacity type
Arrangement		1 Form A, 1 Form C, 2 Form A, 2 Form C	1 Form A, 1 Form C
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)		100 m $\Omega$	
Contact material		1a: AgSnO <sub>2</sub> type 1c, 2a, 2c: AgNi type	
Rating (resistive load)	Nominal switching capacity	5 A 250 V AC, 5 A 30 V DC	10 A 250 V AC, 10 A 30 V DC
	Max. switching power	1,250 VA, 150 W	2,500 VA, 300 W
	Max. switching voltage	250 V AC, 30 V DC	
	Max. switching current	5 A	10 A
	Min. switching capacity <sup>#1</sup>	100 mA, 5 V DC	
Expected life (min. ope.)	Mechanical (at 180 cpm)	5 $\times$ 10 <sup>6</sup>	
	Electrical (at 6 cpm) (Resistive load)	10 <sup>5</sup>	

### Coil

Nominal operating power	530 mW
-------------------------	--------

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*1 Detection current: 10mA
- \*2 Wave is standard shock voltage of  $\pm 1.2 \times 50\mu\text{s}$  according to JEC-212-1981
- \*3 Excluding contact bounce time
- \*4 Half-wave pulse of sine wave: 11ms; detection time: 10 $\mu\text{s}$
- \*5 Half-wave pulse of sine wave: 6ms
- \*6 Detection time: 10 $\mu\text{s}$
- \*7 Refer to "6. Usage, Storage and Transport Conditions" in [AMBIENT ENVIRONMENT](#) section in [Relay Technical Information](#).
- \*8 When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum allowable voltage range.

### Characteristics

		Standard type	High capacity type
Max. operating speed (at rated load)		6 cpm	
Initial insulation resistance		Min. 1,000 M $\Omega$ at 500 V DC	
Initial breakdown voltage*1	Between open contacts	1,000 Vrms for 1 min.	
	Between contacts and coil	5,000 Vrms for 1 min.	
	Between contact sets	3,000 Vrms for 1 min. (2 Form A, 2 Form C)	
Initial surge voltage between contacts and coil*2		Min. 10,000 V	
Operate time*3 (at nominal voltage)		Max. 15 ms	
Release time (without diode)*3 (at nominal voltage)		Max. 5 ms	
Temperature rise (at 20°C) (at nominal voltage) (with nominal coil voltage and at nominal switching capacity)		1a: max. 45°C 1c, 2a, 2c: max. 55°C (resistance method)	1a: max. 45°C 1c: max. 55°C (resistance method)
Shock resistance	Functional*4	Min. 98 m/s <sup>2</sup> {10 G}	
	Destructive*5	Min. 980 m/s <sup>2</sup> {100 G}	
Vibration resistance	Functional*6	10 to 55 Hz at double amplitude of 1.6 mm	
	Destructive	10 to 55 Hz at double amplitude of 2.0 mm	
Conditions for operation, transport and storage*7 (Not freezing and condensing at low temperature)	Ambient temp.*8	-40°C to +85°C -40°F to +185°F	
	Humidity	5 to 85% R.H.	
Unit weight		Approx. 13 g .46 oz	

## TYPICAL APPLICATIONS

- |  |   |
|--|---|
| <p>1. Home appliances<br/>TV sets, VCR, Microwave ovens</p> <p>2. Office machines<br/>Photocopiers, Vending machines</p> | <p>3. Industrial equipment<br/>NC machines, Robots, Temperature controllers</p> |
|--|---|

## ORDERING INFORMATION

Ex. JW 1 F S N - B - DC5V -  

Contact arrangement	Contact capacity	Protective construction	Pick-up voltage	Coil insulation class	Coil voltage	Contact material
1: 1 Form C 1a: 1 Form A 2: 2 Form C 2a: 2 Form A	Nil: Standard (5 A) F: High capacity (10 A)*	S: Sealed type	N: 70% of nominal voltage	Nil: Class E insulation B: Class B insulation	DC 5, 6, 9, 12, 18, 24, 48 V	F: AgSnO <sub>2</sub> type (1a) Nil: AgNi type (1c, 2a, 2c)

\*Only for 1 Form A and 1 Form C type

UL/CSA, VDE, SEMKO, FIMKO, SEV approved type is standard.

Notes: 1. When ordering TV rated (TV-5) types, add suffix-TV (available only for 1 Form A type).

2. Standard packing: Carton: 100 pcs. Case: 500 pcs.

3. Please inquire about the previous products (Cadmium containing parts).

## TYPES

### Standard (5A) types

Contact arrangement	Coil voltage, V DC	Part No.	Contact arrangement	Coil voltage, V DC	Part No.
1 Form A	5	JW1aSN-DC5V-F	2 Form A	5	JW2aSN-DC5V
	6	JW1aSN-DC6V-F		6	JW2aSN-DC6V
	9	JW1aSN-DC9V-F		9	JW2aSN-DC9V
	12	JW1aSN-DC12V-F		12	JW2aSN-DC12V
	18	JW1aSN-DC18V-F		18	JW2aSN-DC18V
	24	JW1aSN-DC24V-F		24	JW2aSN-DC24V
1 Form C	48	JW1aSN-DC48V-F	48	JW2aSN-DC48V	
	5	JW1SN-DC5V	2 Form C	5	JW2SN-DC5V
	6	JW1SN-DC6V		6	JW2SN-DC6V
	9	JW1SN-DC9V		9	JW2SN-DC9V
	12	JW1SN-DC12V		12	JW2SN-DC12V
	18	JW1SN-DC18V		18	JW2SN-DC18V
24	JW1SN-DC24V	24		JW2SN-DC24V	
	48	JW1SN-DC48V	48	JW2SN-DC48V	

### High capacity (10 A) types

Contact arrangement	Coil voltage, V DC	Part No.	Contact arrangement	Coil voltage, V DC	Part No.
1 Form A	5	JW1aFSN-DC5V-F	1 Form C	5	JW1FSN-DC5V
	6	JW1aFSN-DC6V-F		6	JW1FSN-DC6V
	9	JW1aFSN-DC9V-F		9	JW1FSN-DC9V
	12	JW1aFSN-DC12V-F		12	JW1FSN-DC12V
	18	JW1aFSN-DC18V-F		18	JW1FSN-DC18V
	24	JW1aFSN-DC24V-F		24	JW1FSN-DC24V
	48	JW1aFSN-DC48V-F	48	JW1FSN-DC48V	


## COIL DATA (at 20°C 68°F)

Nominal voltage, V DC	Pick-up voltage, V DC (max.) (Initial)	Drop-out voltage, V DC (min.) (Initial)	Nominal operating current, mA (±10%)	Coil resistance, W (±10%)	Nominal operating power, mW	Max. allowable voltage
5	3.5	0.5	106	47	530	130% V of Nominal Voltage (at 60°C 140°F)  120% V of Nominal Voltage (at 85°C 185°F)
6	4.2	0.6	88	68		
9	6.3	0.9	58	155		
12	8.4	1.2	44	270		
18	12.6	1.8	29	611		
24	16.8	2.4	22	1,100		
48	33.6	4.8	11	4,400		

**DIMENSIONS**(mm inch)

Interested in CAD data? You can obtain CAD data for all products with a **CAD Data** mark from your local Panasonic Electric Works representative.



**CAD Data** 1 Form A

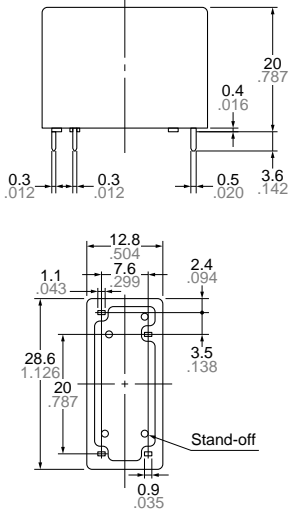

**Dimension :**  
 Max. 1mm .039 inch  
 1 to 3mm .039 to .118 inch  
 Min. 3mm .118 inch

**General tolerance**  
 $\pm 0.1 \pm .004$   
 $\pm 0.2 \pm .008$   
 $\pm 0.3 \pm .012$

**CAD Data** 1 Form C

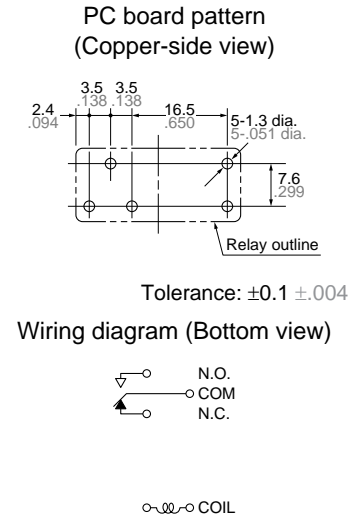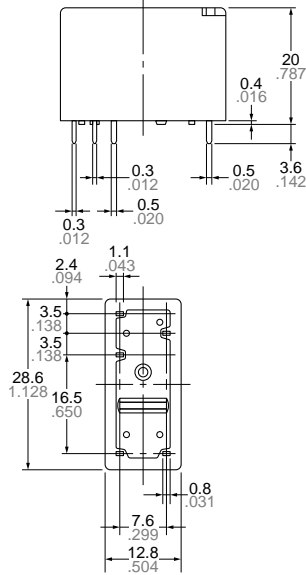


**Tolerance:  $\pm 0.1 \pm .004$**

**Wiring diagram (Bottom view)**

N.O.  
 COM  
 N.C.

COIL



**CAD Data** 2 Form A

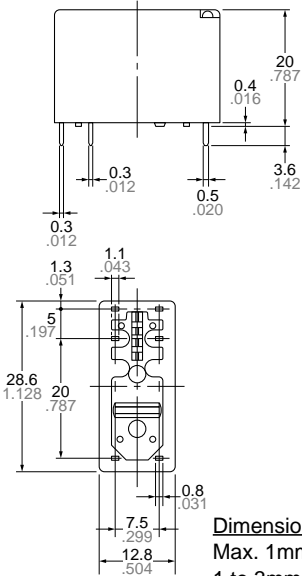

**Dimension :**  
 Max. 1mm .039 inch  
 1 to 3mm .039 to .118 inch  
 Min. 3mm .118 inch

**General tolerance**  
 $\pm 0.1 \pm .004$   
 $\pm 0.2 \pm .008$   
 $\pm 0.3 \pm .012$

**CAD Data** 2 Form C

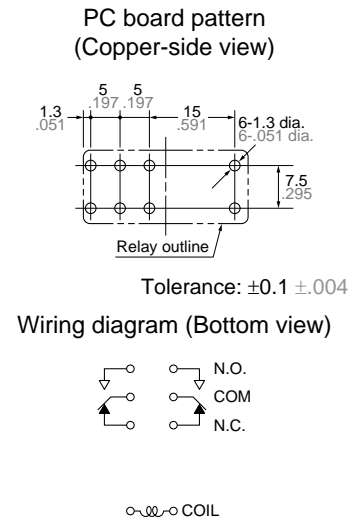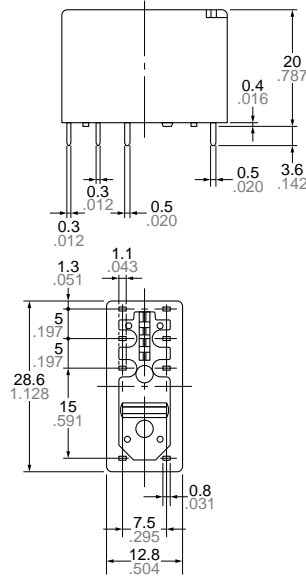

**Tolerance:  $\pm 0.1 \pm .004$**


**Wiring diagram (Bottom view)**

N.O.  
 COM  
 N.C.


COIL

# REFERENCE DATA


1-(1). Maximum operating power  
1 Form A Standard (5 A) type

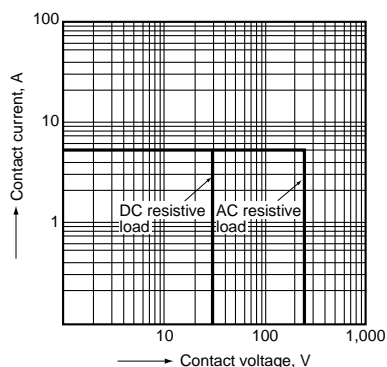


1-(2). Maximum operating power  
1 Form A High Capacity (10 A) type

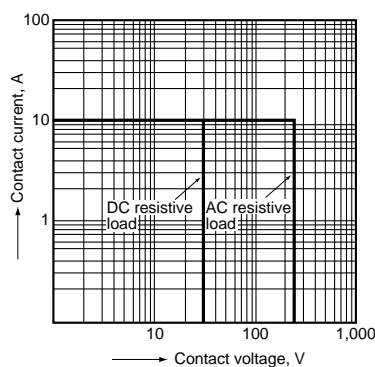


1-(3). Maximum operating power  
1 Form C Standard (5 A) type

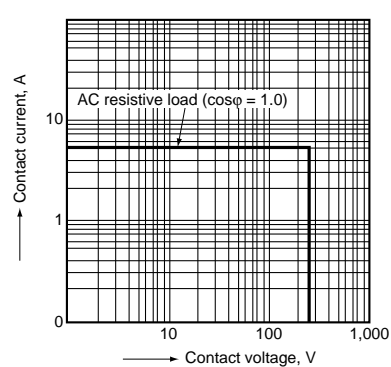


1-(4). Maximum operating power  
1 Form C High Capacity (10 A) type

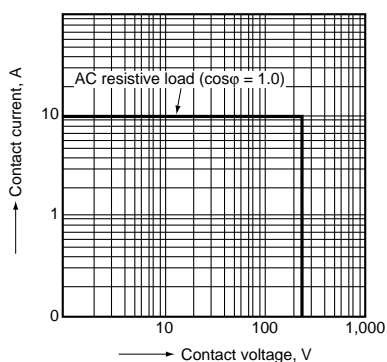


1-(5). Maximum operating power  
2 Form A Standard (5 A) type

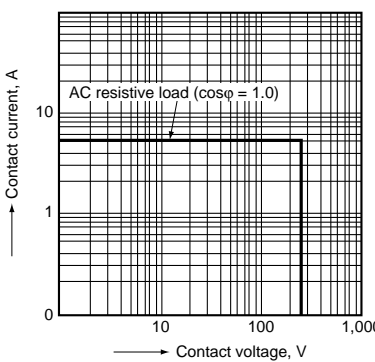


1-(6). Maximum operating power  
2 Form C Standard (5 A) type

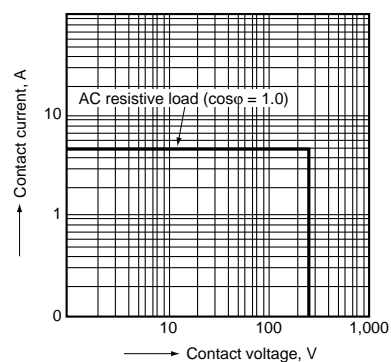


2-(1). Life curve  
1 Form A Standard (5 A) type

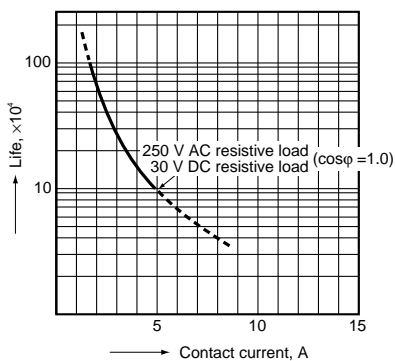


2-(2). Life curve  
1 Form A High Capacity (10 A) type

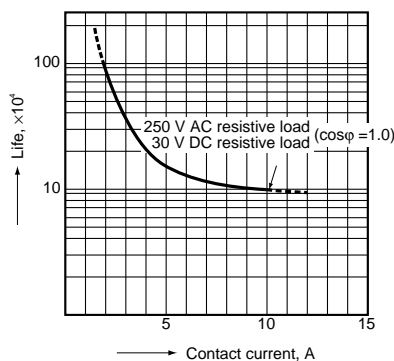


3-(1). Operate/release time  
Sample: JW1aSN-DC12V-F, 10 pcs.  
Ambient temperature: 20°C 68°F

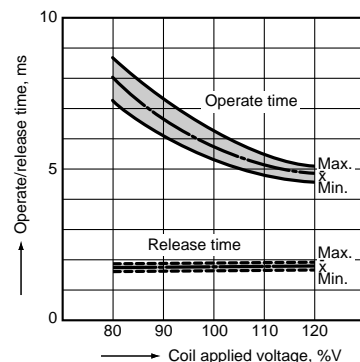


3-(2). Operate/release time  
Sample: JW1aFSN-DC12V, 10 pcs.  
Ambient temperature: 20°C 68°F

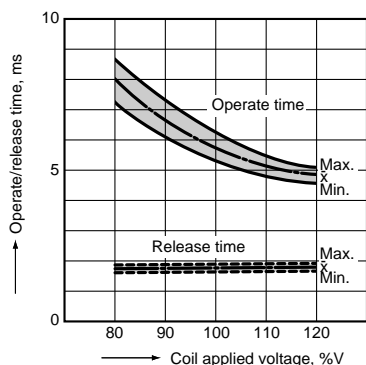


3-(3). Operate/release time  
Sample: JW1SN-DC12V-F, 6 pcs.  
Ambient temperature: 20°C 68°F

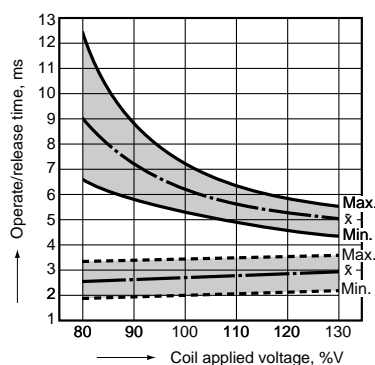


3-(4). Operate/release time  
Sample: JW2aSN-DC24V-F, 6 pcs.  
Ambient temperature: 20°C 68°F

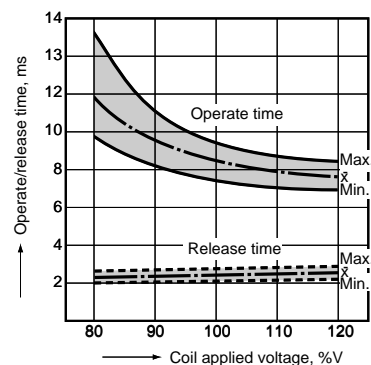


3-(5). Operate/release time  
 Sample: JW2SN-DC12V-F, 6 pcs.  
 Ambient temperature: 20°C 68°F

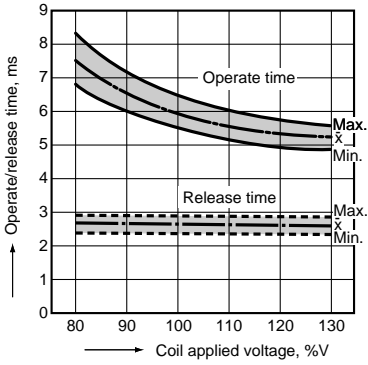

4-(1). Coil temperature rise  
 (Contact carrying current: 5A)  
 Sample JW1aFSN-DC12V-F, 6 pcs.  
 Point measured: Inside the coil

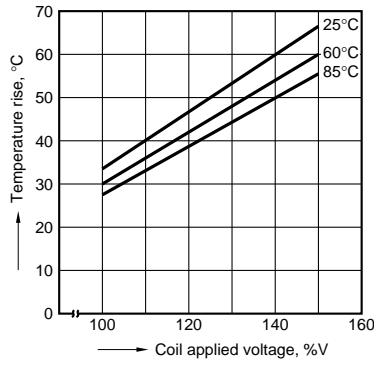


4-(2). Coil temperature rise  
 (Contact carrying current: 10 A)  
 Sample: JW1aFSN-DC12V-F, 6 pcs.  
 Point measured: Inside the coil

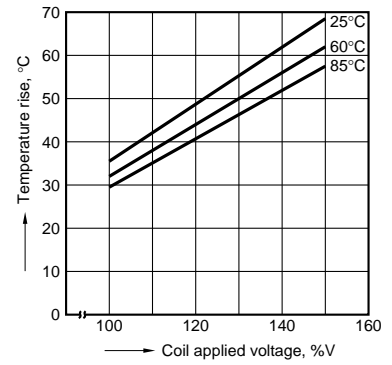


## ACCESSORIES

### DIN terminal sockets

JW1SI




JW2SI

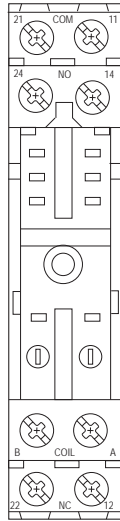


### PCB sockets

JW1PI



JW2PI




### Retaining springs

JWHFSI





JWHFI




h (relay height) = 20.4 mm

## DIMENSIONS


JW1SI  
JW2SI

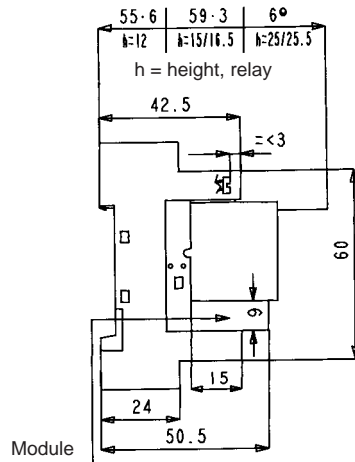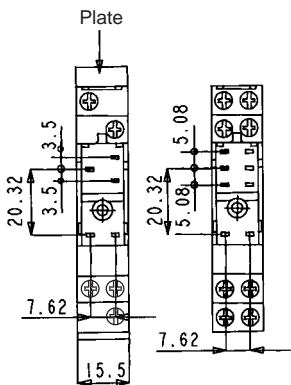

JW1PI



JW2PI

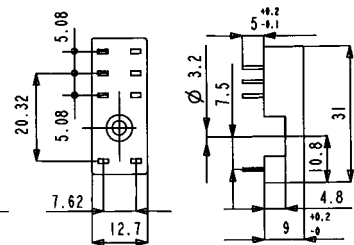

For Cautions for Use, see [Relay Technical Information](#).