


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WIRE SIZE	DIMENSIONS in.			
		A $\pm .03$	B DIA. $\pm .01$	C DIA. $\pm .01$	D $\pm .03$
BSN22	26-22	$\begin{smallmatrix} .79 \\ (20.1) \end{smallmatrix}$	$\begin{smallmatrix} .08 \\ (.20) \end{smallmatrix}$	$\begin{smallmatrix} .04 \\ (.10) \end{smallmatrix}$	$\begin{smallmatrix} .47 \\ (.12) \end{smallmatrix}$



NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
 - A. #26-22 AWG SOLID OR STRANDED
COPPER WIRE
 - B. 221° F (105° C) MAX. TEMP. RATING
2. MATERIAL:
 - A. .02 (0.5) THK COPPER,
TIN PLATED
 - B. HOUSING - NYLON, YELLOW
3. PACKAGE QTY: STD. PKG.-C=100
BULK PKG.-M=1000
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS: CT-520
6. WIRE STRIP LENGTH: 1/4" ^{+1/32"}_{-.0}

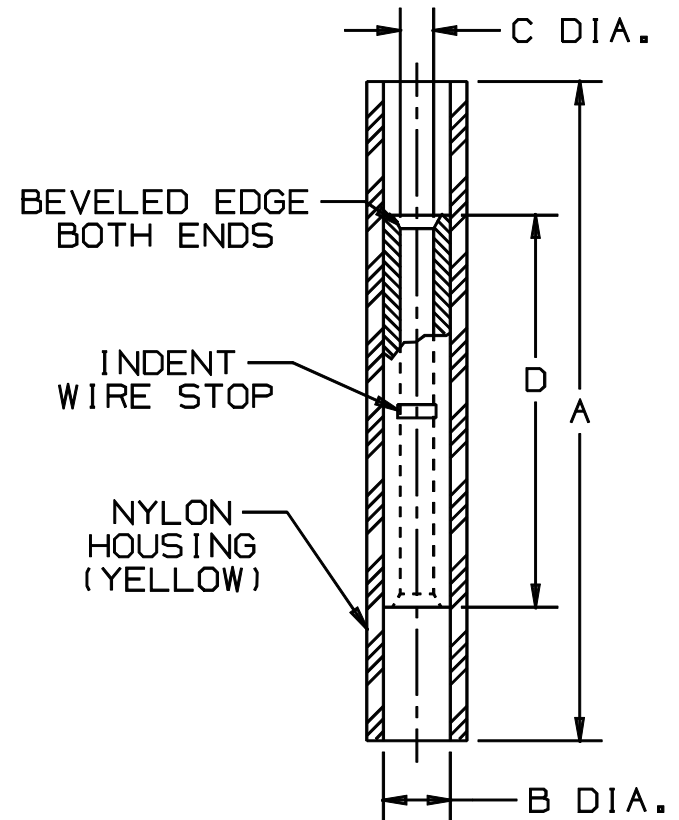

A41337_03

								 PANDUIT CORP. TINLEY PARK, ILLINOIS			
03	1/01	RM		FILESPEC WAS N41337AA_PCD_02				#26-22 BARREL NYLON INSULATED BUTT SPLICE			
02	7/95	MC		UPDATED NOTES AND DIMENSIONS	03438						
					ECN #	APP	PM	DAW		N/A	A41337