

PANDUIT PART NUMBER		WIRE RANGE	COLOR CODE	DIMENSIONS in.	
PREFIX	PK.			A $\pm .03$	B
BSV18X	-C	22-18 *	RED	1.03	.170
	-M			(26,16)	(4,32)
	-MY				
BSV14X	-C	16-14 **	BLUE	1.04	.200
	-M			(26,42)	(5,08)
BSV10X	-L	12-10 ***	YELLOW	1.18	.250
	-D			(29,97)	(6,35)

NOTES :

- UL LISTED AND CSA CERTIFIED FOR :
 - 600 V MAX. VOLTAGE RATING
 - 221°F (105°C) MAX. TEMP. RATING
 - SOLID OR STRANDED, COPPER WIRE

2. MATERIAL :

- STAMPING (22-18 & 16-14) - .03" THK COPPER, TIN PLATED
- STAMPING (12-10) - .04" THK COPPER, TIN PLATED
- HOUSING - VINYL

3. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

- INSTALLATION TOOLS : CT-100, CT-500, CT-550, CT-1550, CT-1551
(CT-500 NOT USED WITH BSV10X, 300V WITH BSV10X & CT-100)

5. * 22-16 AWG WIRE RANGE

WITH CT-500, CT-550, CT-1550, CT-1551 TOOLS

** 18-14 AWG WIRE RANGE

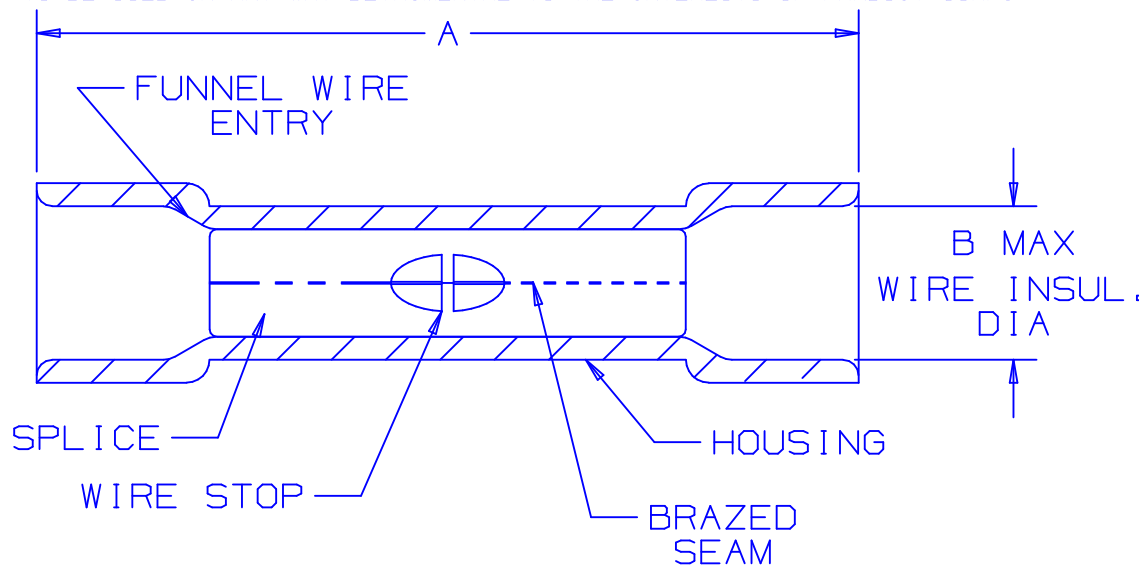
WITH CT-500, CT-550, CT-1550, CT-1551 TOOLS

*** 12-10 AWG STRANDED AND 12 AWG SOLID

COPPER WIRE WITH CT-1550 AND CT-1551 TOOL

- WIRE STRIP LENGTH: 5/16 $+1/32_{-0}$ (7,9 $+0_{-0}$)

- PACKAGE QTY: STD. PKG. -L=50 BULK PKG. -D=500
-C=100 -M=1000
-MY=1000

LISTED
587H
E52164CERTIFIED
LR31212

07	5/05	JHNU		ADDED PACKAGING CODE "MY" TO DRAWING.			
06	10/00	EJS	SKB	DIMENSION B IN PART BSV18X WAS .183, BSV14X WAS .211, BSV10X WAS .260	08760	JAC	CCH
05	11/98	WJB	SKB	UPDATED WIRE STOPS, NOTES, & DIMS.	07265	JCJ	TRO
4	3/95	MS	RLS	UPDATED NOTES AND DIMENSIONS	03080	LA	KS
3	3/88	FS		REDRAWN ON CAD		LA	JB
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM

A41181_07

PANDUIT CORP.

TINLEY PARK, ILLINOIS

EXPANDED VINYL INSULATED BUTT SPLICES

DRAWN BY FES	CHK'D	SCALE NONE	DRAWING NO. A41181
-----------------	-------	---------------	-----------------------