

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


Technical drawing of the G.O.F. Kit Buffer Strippers. The side view shows a length of 5.31 inches [134.9] and a width of 1.71 inches [43.4]. The end view shows a thickness of 0.36 inches [9.1].

PANDUIT P/N	WEIGHT
FBFSP	.114 LB/EA 51.75 g/EA

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE PACKAGE QUANTITY.
- BUFFER STRIPPERS ARE USED TO STRIP 900um BUFFER OFF OF 125um CLADDING.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- MINIMUM CUTTING DIAMETER IS 203 MICRONS (.008").

Isometric view of the G.O.F. Kit Buffer Strippers.

G.O.F. KIT BUFFER STRIPPERS 203 MICRON CUSTOMER DRAWING									
 PANDUIT ™ CORP. TINLEY PARK, ILL 60477									
 THIRD ANGLE PROJECTION					ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.				
					DRAWING FILENAME D35560EP_DC_00A.prt				
DRAWN BY JBA					DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) (.XX) ± .125 (0.3) ANGLES				
					SCALE NONE				
DATE 07-07-97					PART NO. FBFSP				
					DRAWING NO. 35560-93				
REV 1 04-19-05 MYW					SIZE A				
DESCRIPTION RELEASED TO PRODUCTION					ECN - R CUST SUP OTH				
CHK'D CEF									

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
FBFSP	.114 LB/EA 51.75 g/EA

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE PACKAGE QUANTITY.
- BUFFER STRIPPERS ARE USED TO STRIP 900um BUFFER OFF OF 125um CLADDING.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- MINIMUM CUTTING DIAMETER IS 203 MICRONS (.008").

1	04-19-05	MYW		RELEASED TO PRODUCTION	35560-93				
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH

G.O.F. KIT BUFFER STRIPPERS
203 MICRON
CUSTOMER DRAWING

PANDUIT™
CORP.
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.

DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)
(.XX) ±.125 (0.3) ANGLES

THIRD ANGLE
PROJECTION

DRAWN BY
JBA

DATE
07-07-97

CHK'D
CEF

REVIEW DRAWING NUMBERS

DRAWING FILENAME
D35560EP_DC_00A.prt

SCALE
NONE

PART NO.
FBFSP

DRAWING NO.
35560-93

SIZE
A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
FBFSP	.114 LB/EA 51.75 g/EA

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE PACKAGE QUANTITY.
- BUFFER STRIPPERS ARE USED TO STRIP 900um BUFFER OFF OF 125um CLADDING.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- MINIMUM CUTTING DIAMETER IS 203 MICRONS (.008").

1	04-19-05	MYW		RELEASED TO PRODUCTION	35560-93				
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH

G.O.F. KIT BUFFER STRIPPERS
203 MICRON
CUSTOMER DRAWING

PANDUIT™
CORP.
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.

DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)
(.XX) ±.125 (0.3) ANGLES

THIRD ANGLE
PROJECTION

DRAWN BY
JBA

DATE
07-07-97

CHK'D
CEF

REVIEW DRAWING NUMBERS

DRAWING FILENAME
D35560EP_DC_00A.prt

SCALE
NONE

PART NO.
FBFSP

DRAWING NO.
35560-93

SIZE
A

- THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
FBFSP	.114 LB/EA 51.75 g/EA

NOTES:

 - SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE PACKAGE QUANTITY.
 - BUFFER STRIPPERS ARE USED TO STRIP 900um BUFFER OFF OF 125um CLADDING.
 - DIMENSIONS IN PARENTHESES ARE IN METRIC.
 - MINIMUM CUTTING DIAMETER IS 203 MICRONS (.008").

1	04-19-05	MYW		RELEASED TO PRODUCTION	35560-93				
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP

G.O.F. KIT BUFFER STRIPPERS
203 MICRON
CUSTOMER DRAWING

PANDUIT™
CORP.
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.

DIMENSIONAL TOLERANCES ARE:
 (.X) (.XXX)
 (.XX) ± .125 (.0.3) ANGLES

THIRD ANGLE PROJECTION

DRAWN BY JBA

DATE 07-07-97

CHK'D CEF

REVIEW DRAWING NUMBERS


DRAWING FILENAME
D35560EP_DC_00A.prt

SCALE
NONE

PART NO.
FBFSP

DRAWING NO.
35560-93

SIZE
A

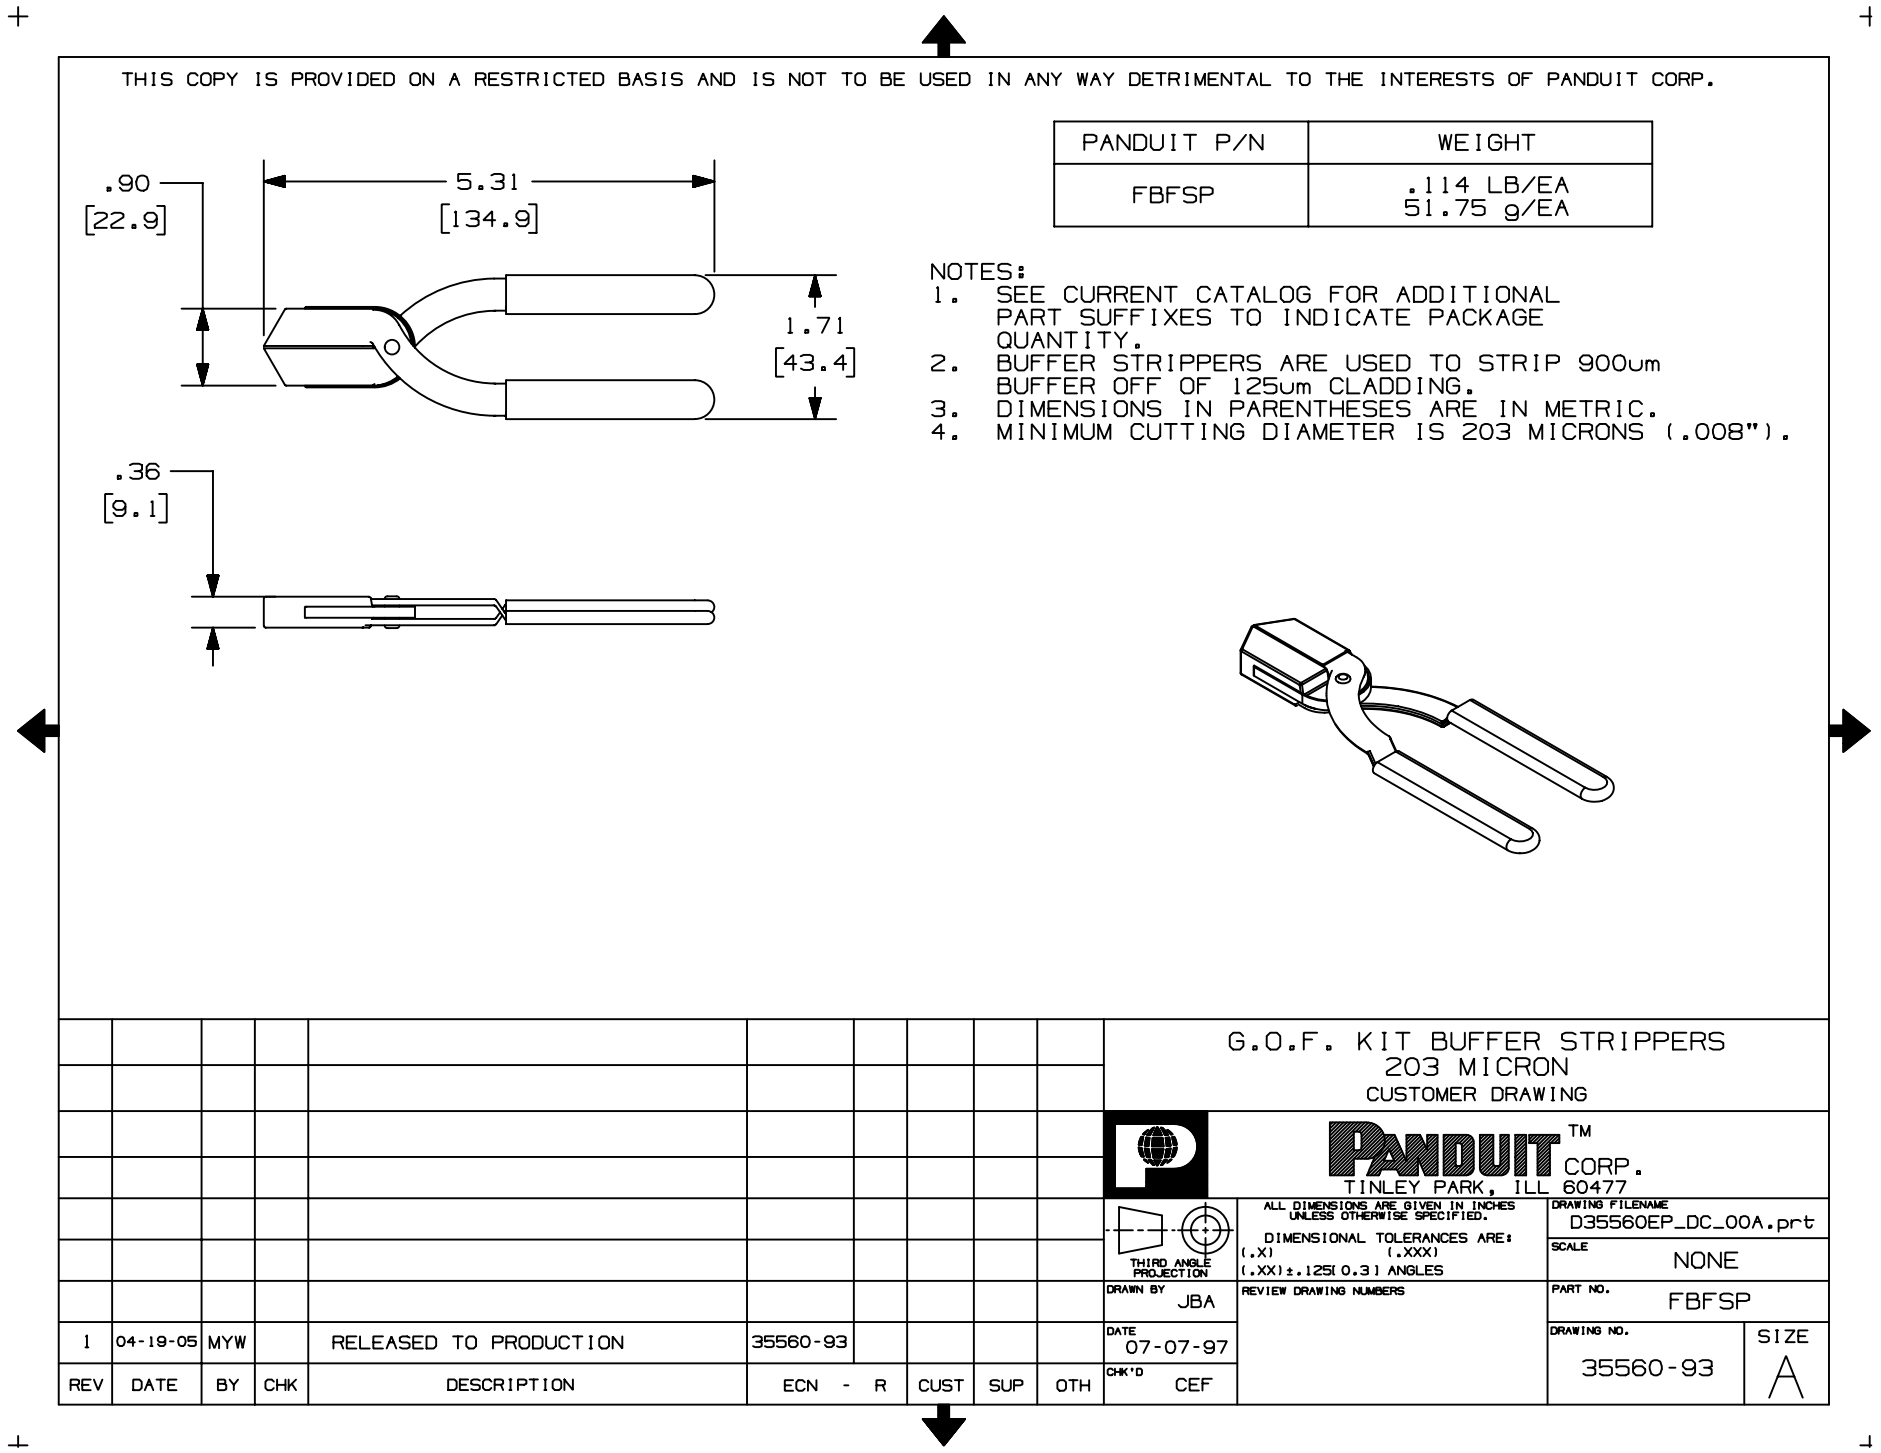

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
FBFSP	.114 LB/EA 51.75 g/EA

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE PACKAGE QUANTITY.
- BUFFER STRIPPERS ARE USED TO STRIP 900um BUFFER OFF OF 125um CLADDING.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- MINIMUM CUTTING DIAMETER IS 203 MICRONS (.008").

1	04-19-05	MYW		RELEASED TO PRODUCTION	35560-93				
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP

G.O.F. KIT BUFFER STRIPPERS
203 MICRON
CUSTOMER DRAWING

PANDUIT™
CORP.
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.

DIMENSIONAL TOLERANCES ARE:
 (.X) (.XXX)
 (.XX) ±.125 (0.3) ANGLES

THIRD ANGLE PROJECTION

DRAWN BY JBA

DATE 07-07-97

CHK'D CEF

REVIEW DRAWING NUMBERS

DRAWING FILENAME
D35560EP_DC_00A prt

SCALE
NONE

PART NO.
FBFSP

DRAWING NO.
35560-93

SIZE
A