






THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT	OPERATING SPECIFICATIONS	ADJUSTABLE OPERATING TEMPERATURE	AGENCY APPROVAL	PLUG CONF I G U R A T I O N
FHSCT	1.36 lbs EACH ( 620.0 G EACH )	120 VAC/60 Hz 1500 W 12.5 A	200° F to 1050° F	UL/CSA	
FHSCT - W		230 VAC/50 Hz 2000 W 8.7 A	100° C to 600° C	VDE/GS/CE EMV	



NOTES:

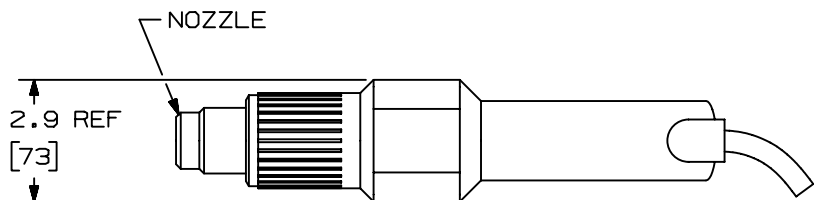1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE PACKAGE QUANTITIES.
2. ALL DIMENSIONS IN BRACKETS ARE METRIC [mm].

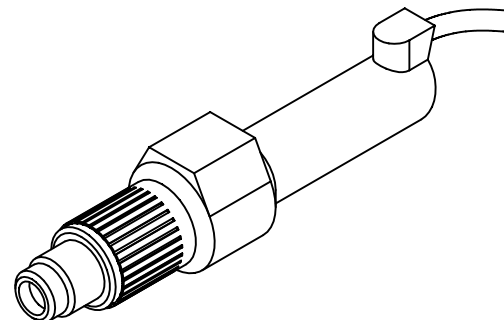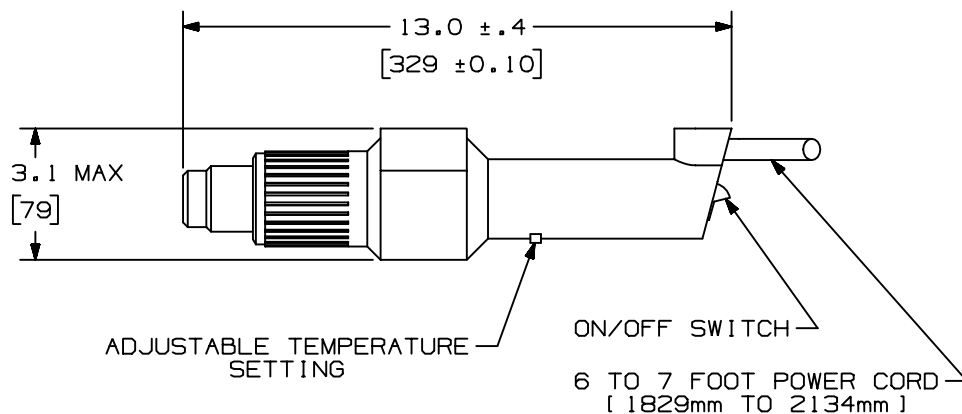

HEAT SHRINK CURING TOOL  
CUSTOMER DRAWING



**PANDUIT**™  
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES,  
UNLESS OTHERWISE SPECIFIED,

DIMENSIONAL TOLERANCES ARE:  
(.X) .06 (1.5) (.XXX) ±  
(.XX) ± ANGLES 5°

DRAWING FILENAME  
M01190BX\_DC\_00B.prt

SCALE	NONE
-------	------


PART NO. FHSC7/FHSC7-W

DRAWING NO.

01 190-22

SIZE
------

A



DRAWN BY	EFK
----------	-----

DATE	10-10-03
------	----------

CHK'D	RTF I
-------	-------

REVIEW DRAWING NUMBERS
------------------------

AS NOTED

[illegible]