




60W* Universal Class B EMI Series PSA45 Series One to Four Output 3x5 Power Supplies

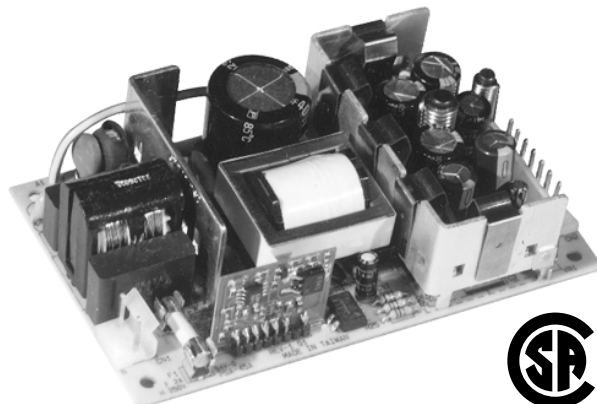

*60W rated at 20CFM air flow cooling

Features

- Industrial
- Zero Minimum Loads
- Surface Mount Controller
- ISO 9001 Quality System
- Extended Design Life

Applications

- Networking
- Peripherals and Terminals
- Mini-Microcomputers

Safety Approvals

- UL 1950
- CSA 22.2 234
- TUV IEC 950
- CE (Low Voltage Directive)

Mechanical Characteristics

- Dimensions:
- Length: 127mm (5.0in.)
 - Width: 76.2mm (3.0in.)
 - Height: 30mm (1.2in.)
 - Weight: 0.27kgm (0.87lb)

Output Specifications

Model	DC Output Voltage	Load				Ripple (1) P-P	Total(2) Regulation
		Min.	Convection	20cfm	Peak(3)		
PSA45-033	+3.3V	0A	9A	10A	10A	50 mV	±2%
PSA45-050	+5V	0A	8A	10A	10A	50mV	±2%
PSA45-120	+12V	0A	4A	5A	5A	120mV	±2%
PSA45-150	+15V	0A	3A	4A	4A	150mV	±2%
PSA45-240	+24V	0A	2A	2.5A	2.5A	240mV	±2%
PSA4525	+5V(V1)	0A	3A	4A	4A	50mV	±2%
	+24V(V2)	0A	1.25A	1.5A	1.5A	240mV	±5%
PSA4531	+5V(V1)	0A	4A	5A	7A	50mV	±2%
	+12V(V2)	0A	1.5A	2.5A	4A	120mV	±5%
	-12V(V3)	0A	0.5A	0.5A	1A	120mV	±5%
PSA4534	+5V(V1)	0A	4A	5A	7A	50mV	±2%
	+15V(V2)	0A	1.2A	2A	3A	150mV	±5%
	-15V(V3)	0A	0.5A	0.5A	1A	150mV	±5%
PSA4541	+5V(V1)	0A	3A	5A	7A	50mV	±2%
	+12V(V2)	0A	2A	2A	4A	120mV	±5%
	-12V(V3)	0A	0.5A	0.5A	1A	120mV	±5%
	-5V(V4)	0A	0.5A	0.5A	1A	50mV	±5%

(1) Measured at 45W by using a 12in. twisted pair terminated with a 10mfd capacitor and a 0.1mfd ceramic in parallel.

(2) See reverse for exact tolerances; may deviate during peak loading conditions.

(3) Peak output of less than 30 seconds; total peak power not to exceed 60W.

PhiHong is not responsible for any errors or changes. Please contact the factory and visit www.phihong.com for the most up-to-date specifications.

AC Input Voltage

90-264VAC

AC Input Frequency

47 to 63Hz

AC Input Current

1A rms (120VAC)

0.5A rms (240VAC)

AC Inrush Current (Cold Start)

20A max., at 120VAC, 45W

40A max., at 240VAC, 45W

Leakage Current

Less than 3.5mA (254VAC)

Efficiency

70% @ 45W 120VAC, 60Hz

Regulation (Line)V1 $\pm 2\%$; V2-4 $\pm 2\%$ **Regulation (Load or Cross)**V1 $\pm 2\%$; V2-4 $\pm 5\%$

(Measured output at 20%-100% load; other outputs at 60% of load)

Hold-up Time

12msec. 45W load, 120VAC

Switching Frequency

50KHz, typical

Overvoltage Protection

Crowbar, V1 only;

Overcurrent Protection

Short circuit, AutoRestart

Operation Temperature

0 to 50°C, derated to 50% at 70°C

Storage Temperature

-25°C to +85°C

MTBF

Full Load, 25°C

Greater than 100,000 hours,
(MIL-HDBK-217F)**EMI**

FCC Class B

EN55022B

Immunity

EN 50082-1: 1997

61000-4-2, Level 3

61000-4-3, Level 2

61000-4-4, Level 2


61000-4-5, Level 3

61000-4-6, Level 2

61000-4-11

Mating Connectors

AC: Molex 09-50-3031

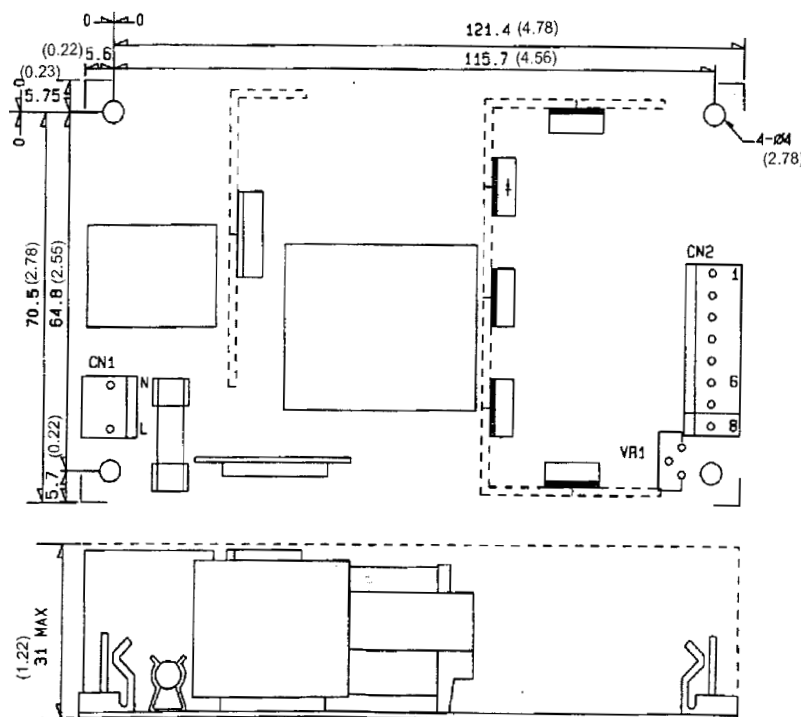DC: Molex 09-50-3061
or 3081 (Quad only)**Dimension Diagram Unit: mm (inch)****For Single Output:**

CN1	1	L
	2	N
CN2	1	+V
	2	+V
	3	+V
	4	GND
	5	GND
	6	GND

For Multiple Outputs:

CN1	1	L
	2	N
CN2	1	V ₂
	2	V ₁
	3	V ₁
	4	GND
	5	GND
	6	V ₃
	7	V ₄ GND
	8	V ₄