

Patch panels - VS-PP-F-RJ45-10G - 1403154

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Patch panels, degree of protection: IP20, number of positions: 8, material: PC-GF, connection method: IDC fast connection, color: gray

Your advantages

- ✓ DIN rail mounting



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 005874
GTIN	4055626005874

Technical data

Mechanical characteristics

Number of positions	8
Number of slots	1
Shielded	yes
Insertion/withdrawal cycles	≥ 750
Connection method	IDC fast connection
Color	gray
Mounting type	DIN rail mounting
Degree of protection	IP20
No. of cable outlets	1

Ambient conditions

Ambient temperature (operation)	-10 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Degree of protection	IP20

Material data

Patch panels - VS-PP-F-RJ45-10G - 1403154

Technical data

Material data

Flammability rating according to UL 94	V0
Housing material	PC-GF
Contact carrier material	PC
Contact material	Copper alloy
Contact surface material	Gold over nickel
Height	71 mm

Electrical characteristics

Number of positions	8
---------------------	---

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

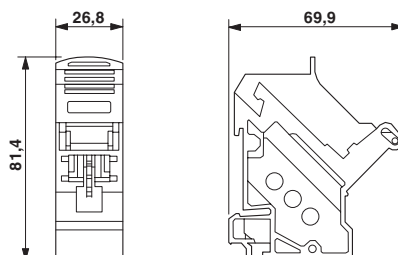

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>