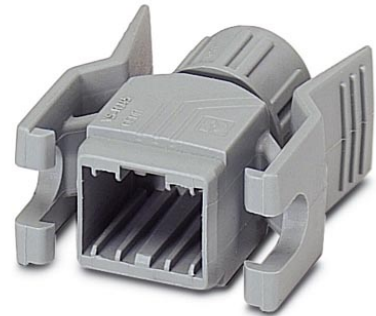


VS-08-T-G-RJ45/IP20

Order No.: 1652295

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652295>

RJ45 sleeve housing, IP20, for pin insert VS-08-ST-RJ45, with push-pull interlocking for panel mounting frames, inverted design, for Factoryline modular managed switches, for cable cross section 5.0 mm ... 6.5 mm

Ethernet**Commercial data**

GTIN (EAN)	 4 017918 936174
sales group	D510
Pack	5 pcs.
Customs tariff	85472000
Catalog page information	Page 168 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Insertion/withdrawal cycles	≥ 750
External cable diameter	5 mm ... 6.5 mm
Cable exit	Straight
Color	gray
Ambient temperature (operation)	-40 °C ... 80 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	PA
Degree of protection	IP20

Accessories


Item	Designation	Description
------	-------------	-------------

General

1688573	VS-08-ST-RJ45	RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 26 and solid wires AWG 26 ... 24
---------	---------------	--

Diagrams/Drawings

Dimensioned drawing

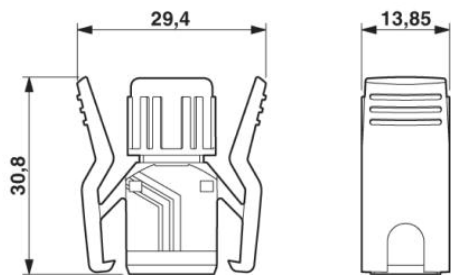

RJ45 sleeve housing, IP20, turned

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;