

VS-25-ST-DSUB-3P-10S-LH

Order No.: 1655425

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655425>

D-SUB contact insert, shell size 3, with 10 signal contacts, for PCB assembly, angled, accommodation for 3 combined contacts, contact type pin, fixing with M3 thread and solder pins, for panel mounting frame VS-25-...

Commercial data

GTIN (EAN)	 4 046356 029353
sales group	D501
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 437 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
03/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	26
Insertion/withdrawal cycles	≥ 200
Connection method	Solder cup
Conductor cross-section	0.34 mm ²
Connection cross-section AWG	22
Insertion force per signal contact	≤ 3.40 N
Ambient temperature (operation)	-55 °C ... 125 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel


Electrical characteristics

Rated voltage (III/3)	60 V
Rated surge voltage	1 kV
Rated current	3 A

Diagrams/Drawings

Dimensioned drawing

D-SUB contact insert

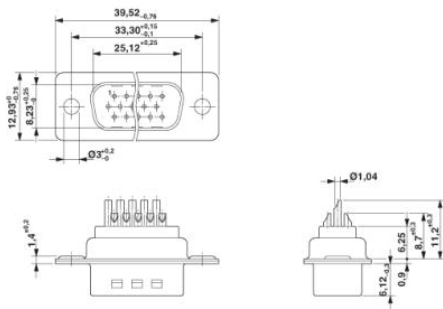

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;