

## D-SUB cable - VS-15-DSUB-20-LI-1,0 - 1656262

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled D-SUB cable shielded, 15-pos., stranded (7-wire), cable color RAL 7000 (gray), IP20 degree of protection, head 1 with socket shell 2 and straight cable outlet, head 2 with pin shell 2 and straight cable outlet, length: 1 m



### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Weight per Piece (excluding packing) | 140.0 g  |
| Custom tariff number                 | 85444290 |
| Country of origin                    | China    |

### Technical data

#### Mechanical characteristics

|                             |          |
|-----------------------------|----------|
| Number of positions         | 15       |
| Insertion/withdrawal cycles | ≥ 50     |
| Cable exit                  | straight |
| Length of cable             | 1 m      |

#### Ambient conditions

|                                 |                |
|---------------------------------|----------------|
| Ambient temperature (operation) | 0 °C ... 70 °C |
| Degree of protection            | IP20           |

#### Material data

|                          |              |
|--------------------------|--------------|
| Housing material         | PVC          |
| Contact material         | Copper alloy |
| Contact surface material | Gold-plated  |
| Outer sheath, material   | PVC          |

#### Electrical characteristics

|                     |    |
|---------------------|----|
| Number of positions | 15 |
|---------------------|----|

## D-SUB cable - VS-15-DSUB-20-LI-1,0 - 1656262

### Technical data

#### Electrical characteristics

|                      |     |
|----------------------|-----|
| Rated current        | 1 A |
| Overvoltage category | III |
| Degree of pollution  | 2   |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27060390 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001408 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11     | 31261501 |
| UNSPSC 12.01  | 31261501 |
| UNSPSC 13.2   | 31261501 |

### Approvals

#### Approvals

---

Approvals

EAC / EAC

---

Ex Approvals

---

D-SUB cable - VS-15-DSUB-20-LI-1,0 - 1656262

Approvals

Approvals submitted


Approval details

EAC


EAC

Drawings


Dimensional drawing

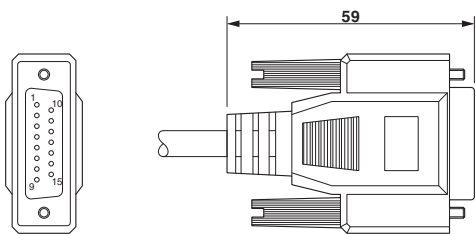


Dimensional drawing

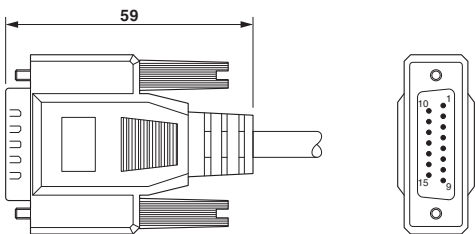

Circuit diagram

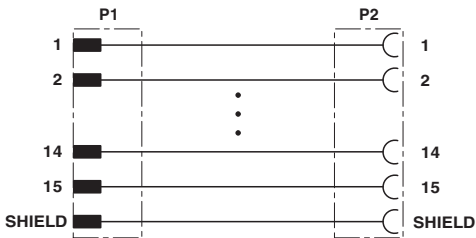

Schematic diagram



Schematic diagram

