

CK2,5-ED-4,00BU AG

Order No.: 1663705



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1663705>

Turned 2.5 crimp contact, individual female contact, core diameter
4.00 mm², silver-plated

Commercial data

GTIN (EAN)	4 017918 123512
sales group	D090
Pack	100 pcs.
Customs tariff	85389099
Catalog page information	Page 600 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
01/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Electrical characteristics

Note	for HC-M-06, HC-M-HV, HC-M-08, HC-M-20, HC-A, HC-BB, HC-B and HC-HV contact carriers, the quality of a crimp connection is determined by the DIN EN 60 352-2
Volume resistance	$\leq 0.003 \Omega$
Ambient temperature (operation)	-40 °C ... 125 °C

Mechanical characteristics

Conductor cross-section	4 mm ²
Connection cross-section AWG	12
Stripping length of the individual wire	7.5 mm (9.5 mm at HC-M-HV...)
Insertion/withdrawal cycles	≥ 500

General characteristics

Type	Individual female contact
Series	HC-M-06
Connection method	Crimp connection
Connection	for HC-M-06, HC-M-HV, HC-M-08, HC-M-20, HC-A, HC-BB, HC-B and HC-HV contact carriers. The quality of a crimp connection is determined by the DIN EN 60 352-2.

Material data

Contact material	Copper alloy
Contact surface material	Silver-plated

Certificates / Approvals



Certification


GOST, UL

Accessories

Item	Designation	Description
Tools		
1676734	CK1,6/2,5-MWZ	Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections
1662722	CK2,5-EWZ	Contact removal tool, for turned and rolled CK- 2.5-... contacts
1687419	CRIMPFOX-1,6/2,5-ED-4,0	Crimping pliers, for turned contacts, CK 1.6 ED... and CK 2.5 ED...

Diagrams/Drawings

Dimensioned drawing

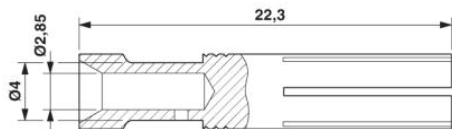

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;