

## WR/PG29-25M

Order No.: 1666854

The illustration shows the version WR/PG16-50M

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1666854>

Corrugated tube, for corrugated tube screw connection, packing  
volume 25 m, type Pg29

### Commercial data

GTIN (EAN)	 4 017918 136901
Note	Made-to-order
sales group	D096
Pack	1 pcs.
Customs tariff	39173900
Catalog page information	Page 628 (PC-2011)

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.


### Technical data

#### General data

Pg screw connection	29
Material	PA
Inflammability class acc. to UL 94	HB
Ambient temperature (operation)	-40 °C ... 110 °C

## Diagrams/Drawings

### Dimensioned drawing

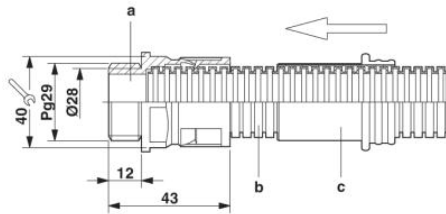

#### Assembly instructions for PG29 corrugated pipe


a = Corrugated screw connection

b = Corrugated pipe

c = Opener

##### Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

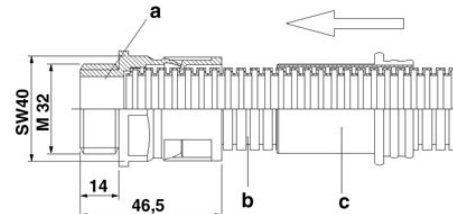

#### Assembly instructions for M32 corrugated pipe

a = Corrugated screw connection

B = Corrugated pipe

c = Opener

##### Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;