

HC-M-04-BU-KOAX-50

Order No.: 1676802



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1676802>

Coaxial contact, for the HC-M-4-MOD-ST module, 50 Ohm

Commercial data

GTIN (EAN)	 4 017918 150556
sales group	D045
Pack	10 pcs.
Customs tariff	85366910
Catalog page information	Page 549 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
01/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Electrical characteristics

Note	Cables that can be used for the coaxial contact: RG174/U, RG188A/U, RG316/U
Rated voltage	50 V AC
Rated current	1.5 A
Volume resistance	$\leq 10 \text{ m}\Omega$ (Phase conductors)

Insulation resistance	10 GΩ
Wave impedance	50 Ω

Mechanical characteristics

Conductor cross section AWG/kcmil max	14
Conductor cross section AWG/kcmil min.	26
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section stranded min.	0.14 mm ²
Insertion/withdrawal cycles	≥ 500

General characteristics

Series	HC-M-04
Connection method	Soldering and crimp connection
Connection in acc. with standard	IEC / EN

Material data

Contact material	Copper alloy
Contact surface material	Gold-plated

Certificates / Approvals



Certification


GOST, UL

Accessories

Item	Designation	Description
Tools		
1206023	CRIMPFOX-HCM-KOAX	Crimping pliers, for coaxial, male and female contacts acc. to DIN 41626, contacts HC-M-04-ST-KOAX-... and HC-M-04-BU-KOAX-... 50 and 75 Ohms respectively
1676747	HC-M4-KOAX-EWZ	Contact removal tool for coaxial contacts

Diagrams/Drawings

Schematic diagram

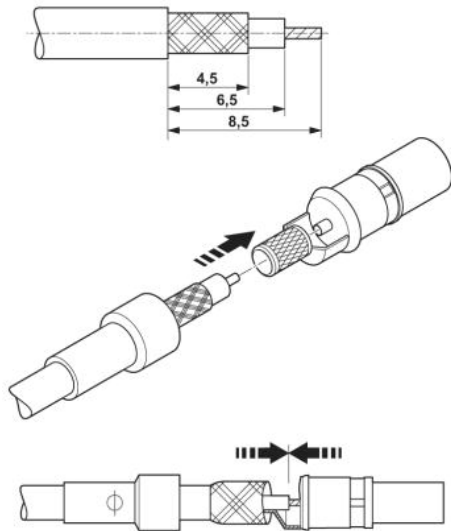

Assembly instructions:

RG cables 174/U; 188A/U; 316/U; 179B/U; 187A/U. Strip the 8.5 mm cable and slide the sleeve over the cable. Then solder the wires to the coaxial contact and crimp the cable along the narrow contact collar. Slide the sleeve over the braided shield and crimp the cable along the narrow contact collar.

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;