

Protective covers - HC-B 24-SD-ML/FS - 1678334

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover B24, with single locking latch, protective cover material: PA, height: 21.6 mm, seal: yes, With lanyard, diameter of retaining cord eyelet: 30 mm

RoHS

Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 151874
GTIN	4017918151874

Technical data

Dimensions

Length	120 mm
Width	43 mm
Height	21.6 mm
Diameter of retaining cord eyelet	30 mm

Ambient conditions

Degree of protection	IP66
Ambient temperature (operation)	-20 °C ... 100 °C

General

Size	B24
Type	For sleeve housing without single locking latch
Material	PA
Seal material	NBR
Locking latch material	High-grade steel, handle: PA-GF
Flammability rating according to UL 94	HB
Color	gray
Seal present	yes
Connection	Plastic protective cover for short-term protection

Protective covers - HC-B 24-SD-ML/FS - 1678334

Technical data

Standards and Regulations


Flammability rating according to UL 94	HB
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

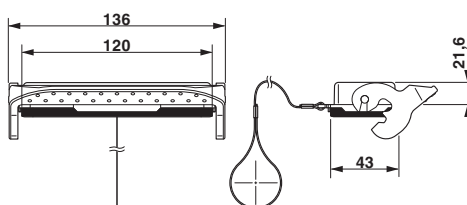

Dimensional drawing

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC	EAC	RU C- DE.AI30.B.01102
-----	------------	--------------------------