

MCC-MT 0,2-0,35

Order No.: 1859988

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1859988>

Female contact, is inserted into the plug after crimping the conductor, for the module plug housing MCC 1...-STZ-3,81 and MCC 1...-STZF-3,81, for cross sections of 0.2 mm² to 0.34 mm²

Commercial data

GTIN (EAN)	4017918109721
sales group	E192
Pack	100 pcs.
Customs tariff	85366990
Weight/Piece	0.000325 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Technical data


Nominal current	4 A
Conductor cross section stranded min.	0.2 mm ²
Max. conductor cross section, stranded	0.35 mm ²

Connection data

Core diameter including insulation	0.13 mm ... 0.2 mm
Stripping length of individual wires	4 mm

Diagrams/Drawings

Dimensioned drawing

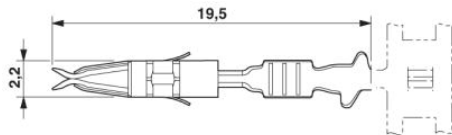

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;