

MCC-MT 0,2-0,35

Order No.: 1859988



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1859988>

Female contact, is inserted into the plug after crimping the conductor, for the module plug housing MCC 1...-STZ-3,81 and MCC 1...-STZF-3,81, for cross sections of 0.2 mm² to 0.34 mm²

Commercial data

EAN	 4 017918 109721
sales group	E192
Pack	100 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.000325 KG
Net weight per piece	0.000204 KG
Catalog page information	Page 827 (C-1-2013)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Nominal current	5 A
Conductor cross section stranded min.	0.2 mm ²
Max. conductor cross section, stranded	0.35 mm ²

Connection data

Core diameter including insulation	1.1 mm ... 1.3 mm
Stripping length of individual wires	4 mm

Certificates / Approvals



Certification

GOST

Certifications applied for:


Certification Ex:

Accessories

Item	Designation	Description
Tools		
1772793	CRIMPFOX-1,6-ER-1,50-GH	Crimping pliers, for IBS DSUB.../C

Drawings

Dimensioned drawing

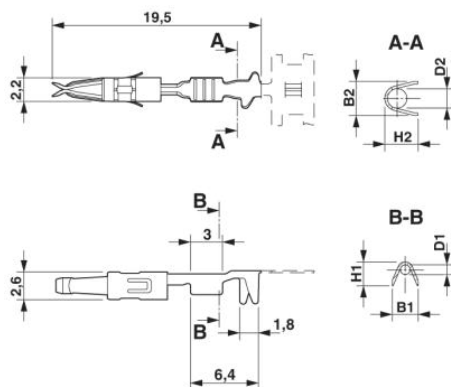

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;