

FOPT 2,2-T

Order No.: 1907911



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1907911>

PC terminal block, Pitch: 10.16 mm, Number of positions: 1,
Connection method: Spring-cage conn., Mounting: Soldering,
Conductor/PCB connection direction: 0 °, Color: green, Green housing
with transmit diode/ optic fibers can be connected: Polymer fiber (in
acc. with IEC 60793-2 type A4a, diameter outer sheath 2.2 mm) / data
rate: 125 Mbps / transmission distance max. 50 m / detailed data sheet
available on request

Commercial data

GTIN (EAN)	 4 017918 606237
Note	Made-to-order
sales group	E480
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 541 (CC-2011)

Product notes

WEEE/RoHS-compliant since:
02/12/2008



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	10.16 mm
-------	----------

Number of positions	1
---------------------	---

Technical data

Range of articles	FOPT
Connection in acc. with standard	EN-VDE
Nominal cross section	0 mm ²
Inflammability class acc. to UL 94	HB

Certificates / Approvals

Certification

GOST

Accessories

Item	Designation	Description
Assembly		
1933011	KST-POF	Bend protection sleeve

Cable/conductor


2744319	PSM-LWL-KDHEAVY-980/1000	Polymer fiber cable, duplex 980/1000 µm, medium-weight version for permanent indoor installation, by the meter, without connector
2799283	PSM-LWL-KDL-980/1000	Polymer fiber cable, duplex 980/1000 µm, light-weight version for indoor installation, by the meter, without connector
2744322	PSM-LWL-RUGGED-980/1000	Polymer fiber cable, duplex, 980 µm/1000 µm, heavy version for permanent indoor installation, sold by the meter without connectors
2744335	PSM-LWL-RUGGED-FLEX-980/1000	Polymer fiber cable, duplex 980/1000 µm, heavy-weight, highly flexible version for flexible conduit applications, by the meter, without connector

Tools


2725147	IBS RL FOC	Fiber cutter for assembling polymer fiber cables for connecting INTERBUS Rugged Line devices
1204504	SZF 0-0,4X2,5	Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

Diagrams/Drawings


Block diagram

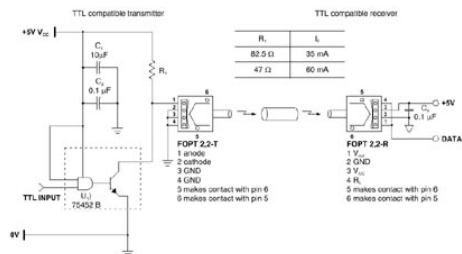


Drilling plan/solder pad geometry

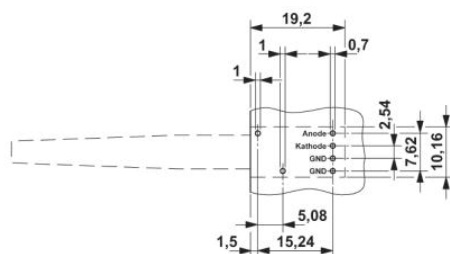

Dimensioned drawing

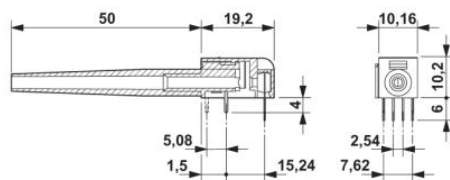

Circuit diagram

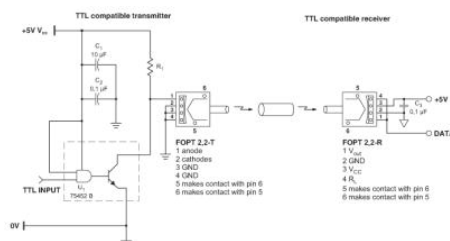

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;