



Extract from the online
catalog

SKBD 20/MT-FLRP

Order No.: 2202505



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2202505>

Plug component, Nominal current: 5 A, Nom. voltage: 400 V, Pitch: 5 mm, Number of positions: 20

Commercial data

EAN	4017918053277
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.07829 KG
Catalog page information	Page 263 (CC-2002)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	5 mm
Number of positions	20
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

SKBD 20/MT-FLRP Order No.: 2202505
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2202505>

Technical data

Stripping length	8 mm
------------------	------

Certificates / Approvals




Certification

GOST

Drawings

Dimensioned drawing

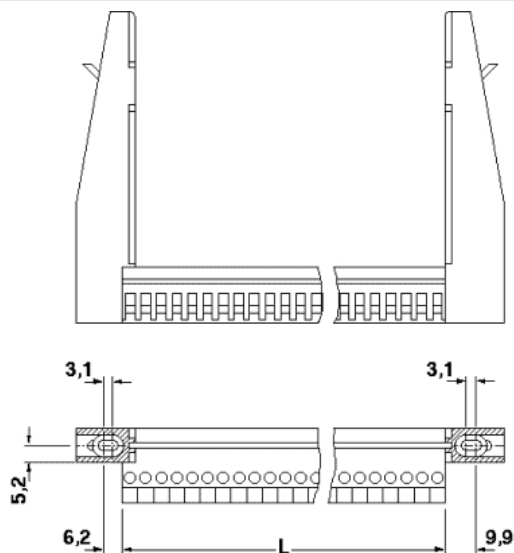

SKBD 20/MT-FLRP Order No.: 2202505
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2202505>

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2009 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com