


Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

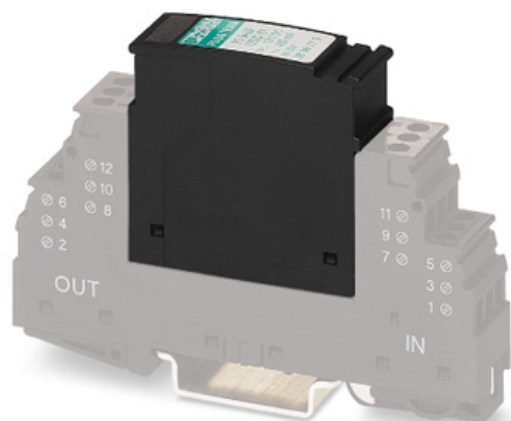

Protective plug PT with HF protective circuit for 4 signal wires. Nominal voltage: 5 V DC

The illustration shows variant PT 5-HF-12 DC-ST

Order No.	2838762
Ord designation	PT 5-HF- 5 DC-ST
EAN	4017918480653
Pack	10 Pcs.
Customs tariff	85363010
Catalog page information	Page 61 (TT-2005)

► Technical data

General

Housing material	PA
Inflammability class acc. to UL 94	V0
Color	black
Ambient temperature (operation)	-40 °C ... 85 °C
Mounting type	On base element
Design	DIN rail module, two-section, divisible
Degree of protection	IP20
Direction of action	Ader-Ader & Ader-Ground/Schirm & optional Ground/Schirm-Erde

Protective circuit

IEC category	C2
IEC category	C3
VDE requirement class	D1
Nominal voltage U_N	5 V DC
Arrester rated voltage U_c (Core-Earth)	5.2 V DC
Nominal current I_N	450 mA (40°C)
Operating current I_c at U_c	
Discharge current to PE at U_c	2000 μ A
Nominal discharge surge current I_n (8/20) μ s (Core-Earth)	10 kA
Lightning test current (10/350) μ s, peak value I_{imp}	2.5 kA (2 x - 10/350 μ s)
Output voltage limitation at 1 kV/ μ s (Core-Core) spike	
Output voltage limitation at 1 kV/ μ s (Core-Earth) spike	
Output voltage limitation at 1 kV/ μ s (Core-Core) static	
Output voltage limitation at 1 kV/ μ s (Core-Earth) static	
Output voltage limitation at 1 kV/ μ s (Core-GND) static	
Residual voltage at I_n , (conductor-conductor)	
Residual voltage at I_n , (conductor-ground)	
Residual voltage at I_n , (conductor-GND)	
Cut-off frequency f_g (3 dB), asym. (GND) in 100 Ohm system	70 MHz
Resistance in series	2.2 (1-2/5-6/7-8/11-12)

General

Type of connection	PLUGTRAB plug-in system
Connection type IN	PLUGTRAB plug-in system
Connection type OUT	PLUGTRAB plug-in system
Tightening torque, min	0.5 Nm

Connection, protective circuit

Standards/regulations	IEC 61643-21
Standards/regulations	E VDE 0845-3-1

► Certificates

UL

Nominal voltage U_N

5 V

Nominal current I_N


0.45 A

► Drawings


Diagram



Dimensioned drawing

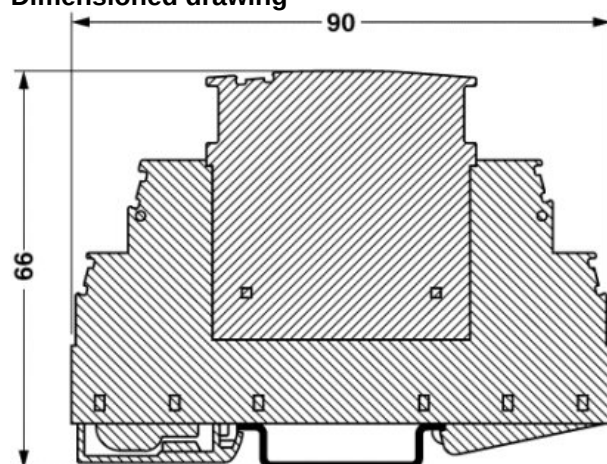

Circuit diagram

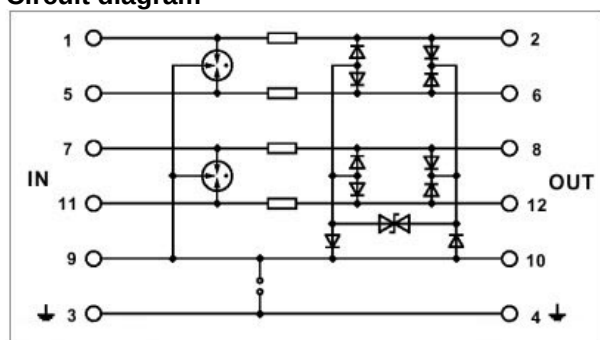

► Accessories

Item	Designation	Description
Marking		
1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
0811228	X-PEN 0,35	Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm
1050004	ZB 5 :UNBEDRUCKT	Zack strip, unprinted, 10-section, for individual labeling with M-PEN, ZB-T or CMS system, pack is sufficient for 100 terminal blocks, for a terminal width of 5.2 mm, color: White
2715212	ZB 5,8,LGS:FORTL.ZAHLEN	Zack marker strip, 10-section, printed horizontally: with consecutive numbers, 1-10, 11-20 etc. up to 991-1000, color: white
1050305	ZB 5,8:SO/CMS	Zack strip, 10-section, divisible, special printing, marking according to customer requirements
2715209	ZB 5,8:UNBEDRUCKT	Zack strip, unprinted, strips with 10 labels for individual labeling with M-PEN or CMS system, for terminal block width: 5.8 mm, color: White
1050295	ZB 5:SO/CMS	Zack strip, 10-section, divisible, special printing, marking according to customer requirements

► Additional products

Item	Designation	Description
Assembly		
2839295	SSA 3-6	Shield fast connection for diameter 3-6 mm
2839512	SSA 5-10	Shield fast connection for diameter 5 -10 mm

► Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>
Phoenix Contact
Technical modifications reserved;