

EMG 45-SI8S

Order No.: 2954950

The illustration shows version EMG 45-SI/K, with 8 cartridge fuse holders

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2954950>

Fuse module, for 8 cartridge fuse inserts, 5 x 20 mm, common
connection point

Commercial data

GTIN (EAN)	4017918085216
sales group	H080
Pack	5 pcs.
Customs tariff	85363010
Weight/Piece	0.13361 KG
Catalog page information	Page 433 (IF-2005)

Product notes

WEEE/RoHS-compliant since:
04/01/2007



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	250 V AC
Cartridge fuse inserts	Max. 6.3 A/250 V AC (between two terminal blocks) Max. 3 A/250 V AC (for simultaneous loading of inserts)
Ambient temperature (operation)	-20 °C ... 50 °C

Ambient temperature (storage/transport)	-20 °C ... 50 °C
Width	45 mm
Height	62 mm
Depth	75 mm
Mounting position	Any
Assembly instructions	In rows with zero spacing
Standards/regulations	IEC 664
	IEC 664 A
	DIN VDE 0110-1
	DIN VDE 0160
	DIN VDE 0109-11, draft
Pollution degree	2
Surge voltage category	III

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Type of connection	Screw connection

Certificates / Approvals

Certification


GOST

Accessories

Item	Designation	Description
Marking		
2947035	EMG-GKS 12	Equipment marker, width 12 mm

Diagrams/Drawings

Circuit diagram

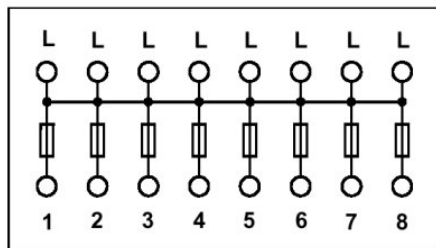

EMG 45-SI8S

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;