


► General data

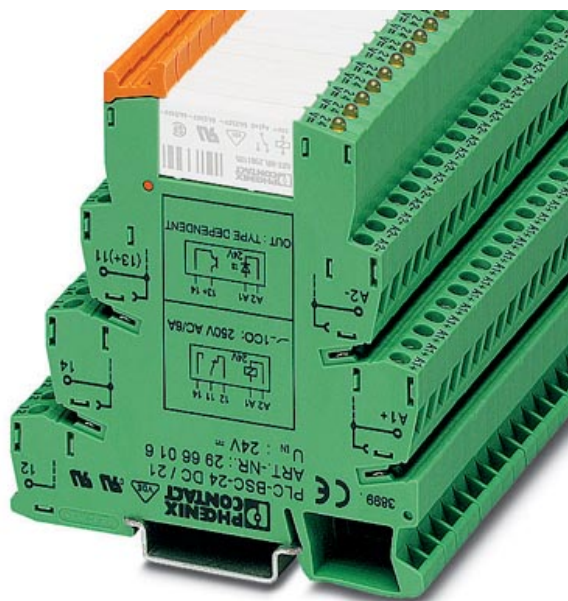

6.2 mm PLC basic terminal blocks with screw connection system, input voltage 24 V DC

Order number	2966016
Type	PLC-BSC- 24DC/21

Barcode number	4017918130794
Unit pack	10 Pcs.
Customs tariff	85364190990

► Technical data

Input data

Nominal input voltage U_N	24 V DC
Status display	LED

Connection data

Min. conductor cross section, rigid	0.14 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Max. conductor cross section, flexible	2.5 mm ²
Min. conductor cross section AWG/kcmil	26
Conductor cross section AWG/kcmil max	14
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M 3

General data

Length	80 mm
Width	6.2 mm
Height	94 mm
Color	green
Ambient temperature (operation)	-20 °C ... 60 °C
Operating mode	100% operating factor
Inflammability class acc. to UL 94	V0
Installation position	Any
Assembly instructions	In rows with zero spacing

► Certificates

CUL

Comments	Input
Nominal voltage U_N	24 V
AWG/kcmil	30-12
Comments	Output
Nominal voltage U_N	250 V
Nominal current I_N	6 A
AWG/kcmil	30-12

UL

Comments	Input
Nominal voltage U_N	24 V
AWG/kcmil	30-12
Comments	Output
Nominal voltage U_N	250 V
Nominal current I_N	6 A
AWG/kcmil	30-12

► Drawings

Approval logo



► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel + 49 - (0) 52 35 - 3-00
Fax + 49 - (0) 52 35 - 3-4 12 00
www.phoenixcontact.com

© Phoenix Contact
Technical modifications reserved