


PMC-1424THX

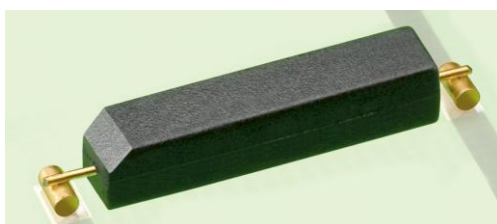

PMC-1424THX

Latching SMD Reed Switch

Electrical Characteristics

@ 25 °C

Contact form		E
Contact material		PGM*
Contact rating max.	W / VA	5
Switching voltage max.	VDC	140
	VAC	100
Switching current max.	A	0.5
Carry current max.	A	1
Breakdown voltage min.	VDC	180
Contact resistance max. (initial)	mΩ	200
Insulation resistance min.	Ω	10 ¹⁰

*PGM = Platinum Group Metal

Magnetical Characteristics (of unmodified Reed Switch)

@ 25 °C

Pull in range available	AT	n.d. - n.d.
Drop out min.	AT	n.d.
Test coil	TC	n.d.
Test equipment tolerance	± AT	

Operating Characteristics

@ 25 °C

Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	5000
Operate time max. (incl. bounce)	ms	0.4
Release time max.	ms	0.1

Environmental Characteristics

Operating temperature	°C	-20 to +125
Storage temperature	°C	-20 to +125
Soldering temperature max.	°C	255
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	20
Lead tensile strength min.	kg	3

Features

- Small size
- Polarity sensitive
- Zero power consumption
- Suitable for lead-free soldering
- Suitable for automated assembly
- Tape & reel packaging
- Over 1 billion reliable operations at dry circuits or low level loads


Approvals

RoHS

REACH

cAUS

Dimensions in mm

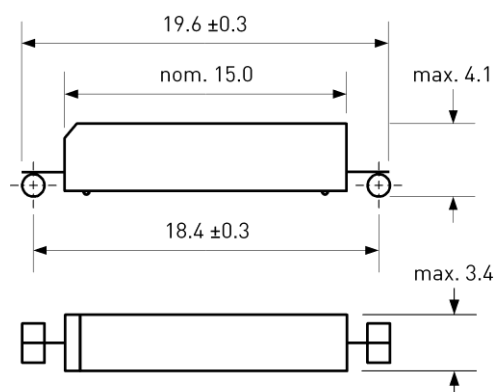


North Pole mark = chamfered edge

Ordering Information

Packing Unit	2000	pcs
Weight per piece	0.4	g
Weight per package	1200	g
Reel size	13	inches
Standard AT ranges		

Ordering example



A diagram showing a mobile phone on a base station. The base station is a rectangular block with a smaller rectangular block on top of it. The mobile phone is a smaller rectangular block with a circular antenna on top, sitting on the base station.