


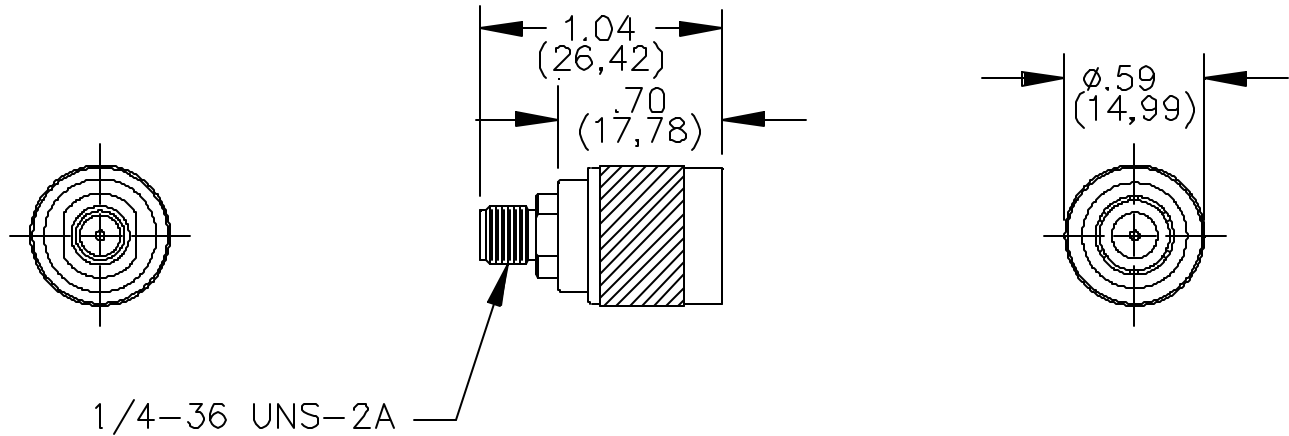

### MATERIALS:

Body: Gold Plated Beryllium Copper,

Male Contact - Gold Plated Brass,

Female Contact – Gold Plated Beryllium Copper

Dielectric: Teflon per L-P-403

Finish: Body and Contacts – Gold plated per MIL-G-45204, Type II, Class 2

Marking: “Pomona 4293”

### RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 335VRMS Max.

Nominal Impedance: 50 Ohms

Frequency Range: 0-12.4 GHz.

Operating Temperature: -65°C (-85°F) to (+329°F)

### ORDERING INFORMATION: Model 4293

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ " (.51 mm), .xxx =  $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA