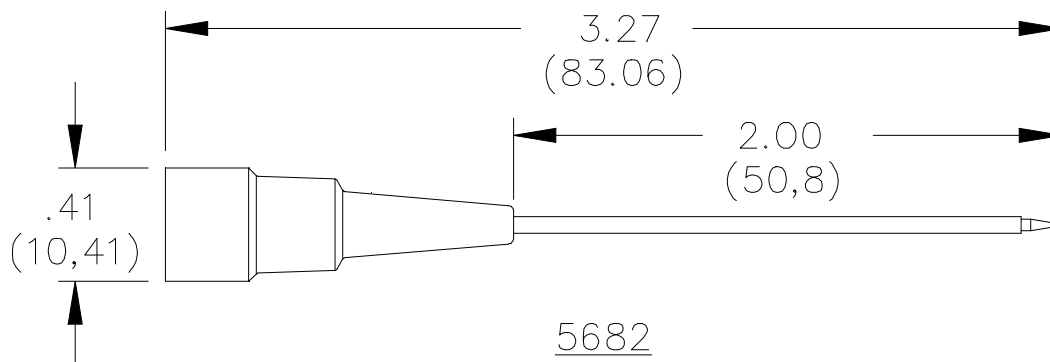


**FEATURES:**

- Fits directly over the test probe tip , allowing testing of hard-to-reach points.
- Tip is insulated to the point, providing protection from accidental shorting of adjacent components.

MATERIALS:

Insulation: Nylon

Tip: Stainless Steel with Kynar Insulation

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 300 VRMS/DC

Operating Current: 3 Amperes Max.

ORDERING INFORMATION: Model 5682-*

* = Color, -0 Black, -2 Red

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA