


MODEL NUMBER

5700-#

COLOR	
-0	BLACK
-1	BROWN
-2	RED
-3	ORANGE
-4	YELLOW
-5	GREEN
-6	BLUE
-7	VIOLET
-8	GRAY
-9	WHITE

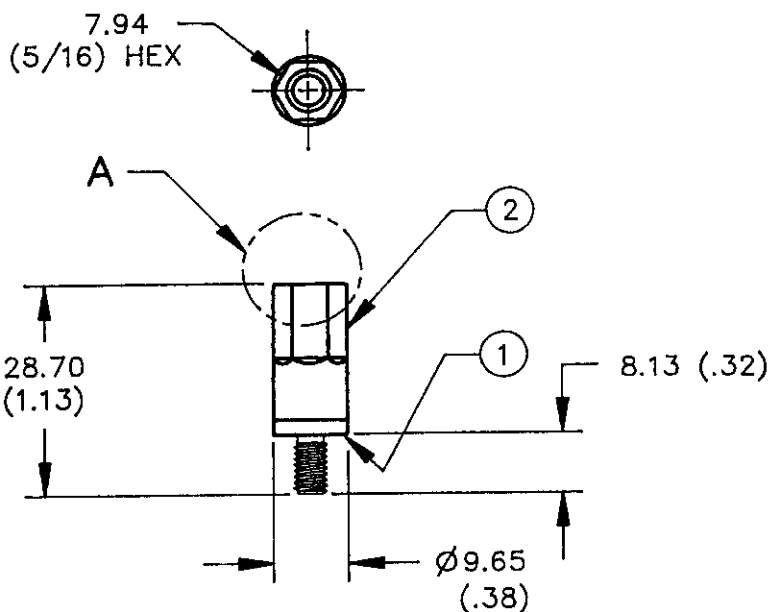

SPECIFICATIONS

1.0 MATERIALS AND FINISH:

- ①: BANANA JACK WITH 8-32 BINDING HEAD THREADED STUD.
BRASS
ALLOY 360, 1/2 HARD
ELECTROLESS NICKEL PLATE PER MIL-C-26074, CLASS 1,
200/300 MICROINCHES.
- ②: INSULATION
NYLON 6, 20% GLASS FILLED.

2.0 RATING:

2.1 ENVIRONMENTAL:

OPERATING TEMP.: - - - - - +102°C (+216°F) MAX.

2.2 ELECTRICAL:

OPERATING CURRENT: - - - - - 25 AMPS MAX.

POWER - - - - - 7,500 WATTS MAX.

2.3 MECHANICAL:

TIGHTENING TORQUE: 16 in-lb MAX.
(USED WITH SIZE 5/16, DEPTH 1/4,
MIN., 6 POINTS SOCKET).

3.0


TERMINAL STRIP TO BE USED:

11.18 (.44) MIN. IN BASE THICKNESS

14.29 (9/16) MIN. IN TERMINAL SPACING.

DETAIL A

SECTION VIEW
NOT TO SCALE

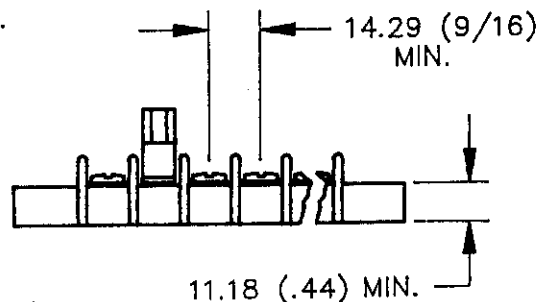

3.0

TERMINAL STRIP

NOT TO SCALE

ALL SPECIFICATIONS ARE TO LATEST REVISION, UNLESS OTHERWISE NOTED.
ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:

TERMINAL STRIP BANANA JACK ADAPTER,
8-32 THREADED STUD

CODE
IDENT. NO.

05276

MODEL NO.

5700

23 SEP 96/A