





REVISION			
REV.	DESCRIPTION	DATE	APPROVED

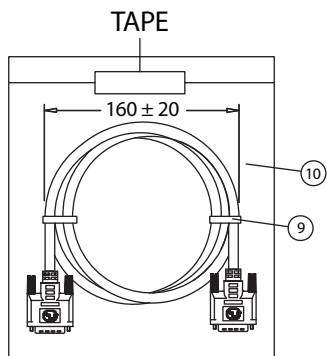


FRONT

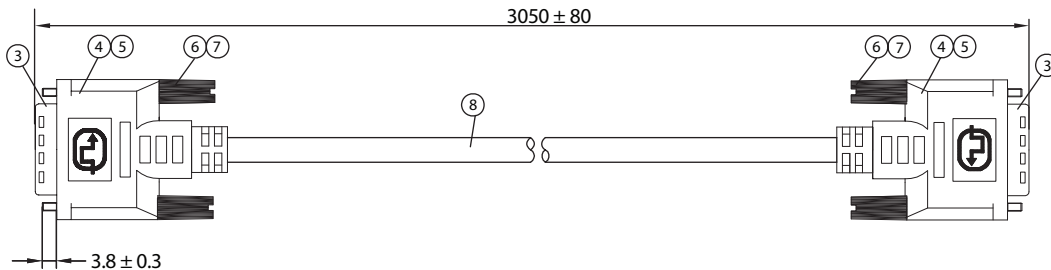

(24+1)P/M ASS'Y TYPE



(24+1)P/M ASS'Y TYPE



FRONT

P1 P2 PIN OUT

1	WHITE	1	17	WHITE	17	6	WHITE	6
2	ORANGE	2	18	YELLOW	18	7	YELLOW	7
3	BRAIN	3	19	DRAIN	19	14	RED	14
4	DRAIN	4	20	WHITE	20	15	BLACK	15
5	BROWN	5	21	GREEN	21	16	BROWN	16
9	WHITE	9	22	DRAIN	22	SHELL	BRAID	SHELL
10	BLACK	10	23	WHITE	23			
11	BRAIN	11	24	RED	24			
12	WHITE	12						
13	BLUE	13						

NOTES:

- CABLE: UL20276
28AWGx1P+DW+FOIL)x7+28AWGx3C+28AWGx1P+MYLAR+FOIL+BD
OUTER JACKET COLOR: BLACK, OD: 8.5 ± 0.3mm
PRINTING: E166307 AWM 20276 28AWG 80°C 30V VW-4
LOW VOLTAGE COMPUTER CABLE
- CONNECTORS: DVI(24+1)P/M TO DVI(24+1)P/M
- HOOD: ASS'Y TYPE, COLOR: BLACK
- ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
<2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.
<3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
- PACKING: 1PC/POLYBAG

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	DVI (24+1)P/M - CONTACT	BRASS / GOLD PLATED SOLDER TYPE	50	
②	DVI (24+1)P/M - INSULATOR	THERMOPLASTIC / BLACK UL94V-0	2	
③	DVI (24+1)P/M - SHELL	NICKEL PLATED	2	
④	CAN	STEEL TIN PLATED ID: 9.0mm	2	
⑤	DVI (24+1)P/M - COVER	45P PVC/COLOR: BLACK	2	
⑥	THUMB SCREW	#4-40 2.8x45mm, NICKEL PLATED	4	
⑦	SCREW - MOLD	35P PVC / COLOR: BLACK	4	
⑧	CABLE DVI 24+1 UL 20276	KL 3007ABK01A	1	
⑨	MINI TIE	PE/BLACK	2	
⑩	POLYBAG	0.08x220x260	1	

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCT DIVISION		
		Part Number:	1321027-10	
0-1	0.15	Description: DVI (24+1)P/M - DVI (24+1)P/M		
1-6	0.20			
6-18	0.30	Drawn / Date	Checked / Date	Approved / Date
18-50	0.50			
50-120	0.70			
120-250	0.90			
250-500	1.20			
		B.Grubb 01-25-07	01-25-07	JJH / 01-25-07