


Revision		
Rev.	Description	Date
		Approved

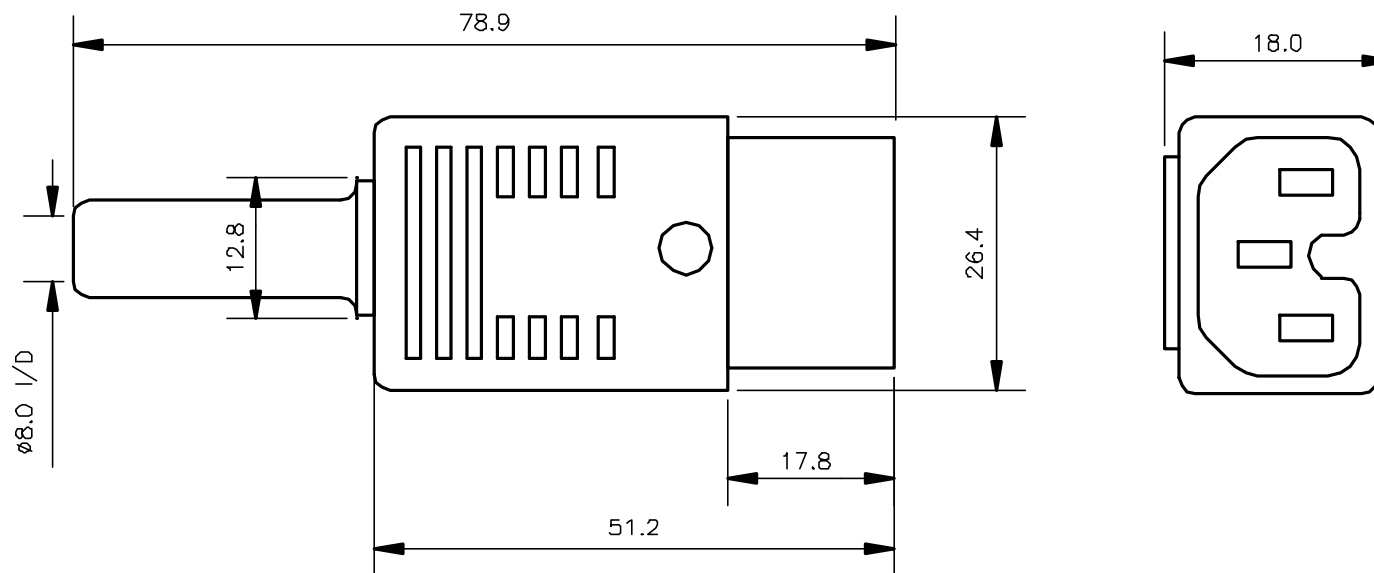

Max. Rating: 10A 250V AC
 Contact Resistance: < 10m OHM
 Insulation Resistance: > 10,000 M OHM
 A.C. Breakdown: Pole-Pole 4.5 kV Pole- Accessible 4 kv
 Operating Temperature: -40°C to +70°C
 Withdrawal Force: 10N(Min), 50N (Max)

Material:

Moulding: Nylon, flammability Rating U.L. 94V-0

Contacts: Brass, nickel plated

Approvals:

UL, CSA, VDE, SEV, BSI, SEMKO, DEMKO, SETI and IMQ

NOTE: For use with 18 AWG cordage.

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp.		
		PPC DIVISION		
		Part Number: 709-00/00		
		Description:		
		REWIRABLE PLUG ASSEMBLY		
0-1	0.15			
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70	Drawn/Date	Checked/Date	Approved/Date
120-250	0.90	B.ZHANG	04-11-02	JJH/04-11-02
250-500	1.20	04-11-02		