
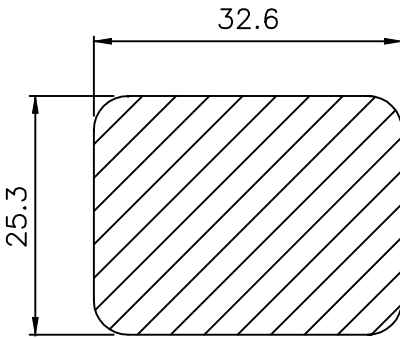

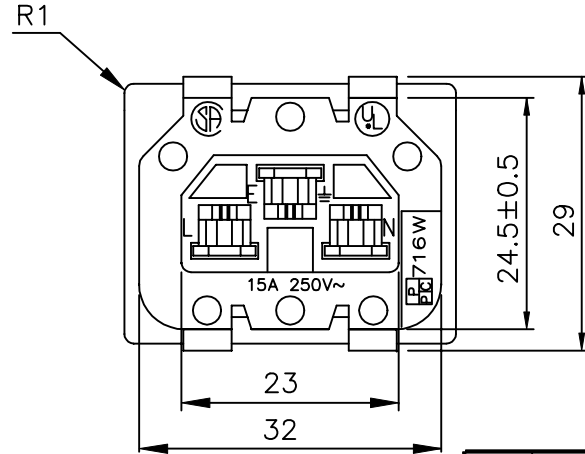
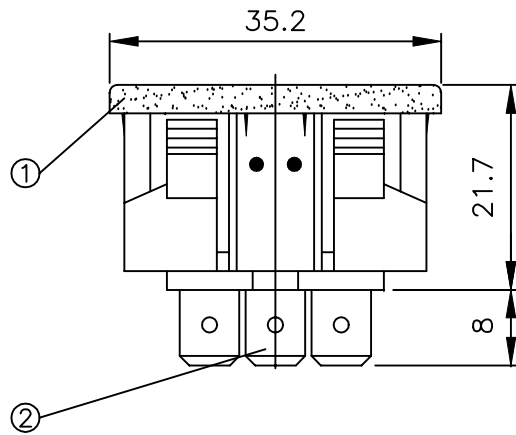
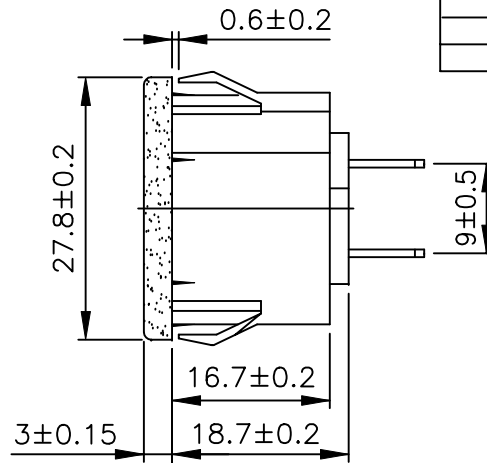


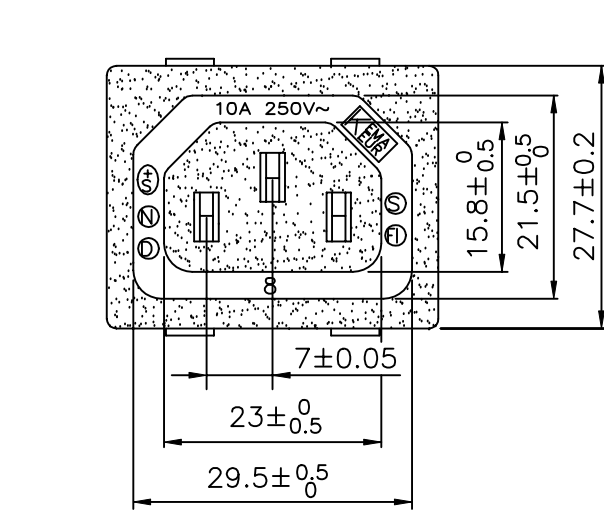

RECOMMENDED PANEL THICKNESS 0.8~1.5mm

Revision			
Rev.	Description	Date	Approved

Material:

Housing: Thermoplastic
Terminal: Copper Alloy

Characteristics:

Rating: 10A/15A 250 V AC

Insulation Resistance: Over 100M OHM 500VDC

Dielectric Strengths: 2000VAC AC One Minute

Approvals: UL, CSA, VDE, SEV, SEMKO, DEMKO,
KEMA, NEMKO AND SETI

2	Contact PIN Bronze Strip t=2mm Ni-Plated			
1	Body Insulator NYLON Black Color			
Dim range (mm)	Tolerance +/-(mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 716W-X2/03		
0-1	0.15	Description: UNIVERSAL SNAP-IN OUTLET		
1-6	0.20			
6-18	0.30	Unit: mm	Rev A	
18-50	0.50			
50-120	0.70	Drawn/Date	Checked/Date	Approved/Date
120-250	0.90	B.ZHANG 03-10-04	PC/03-10-04	JJH/03-10-04
250-500	1.20			