

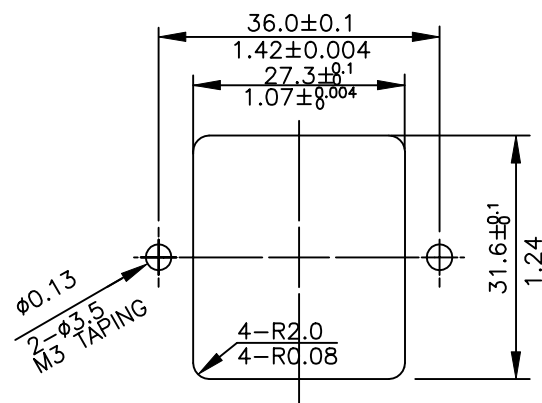
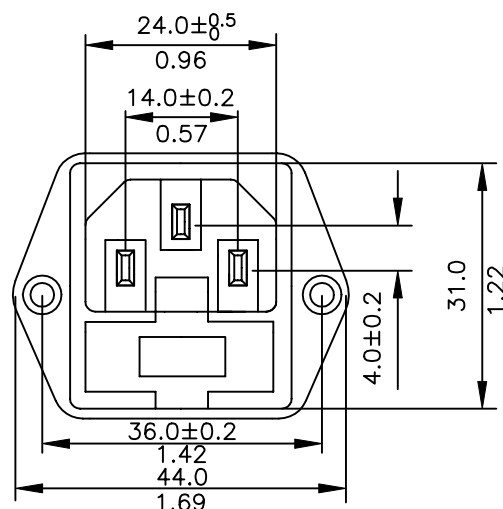




Revision			
Rev.	Description	Date	Approved
B.	DETAIL DIMENSIONS ADDED	01/27/04	PC

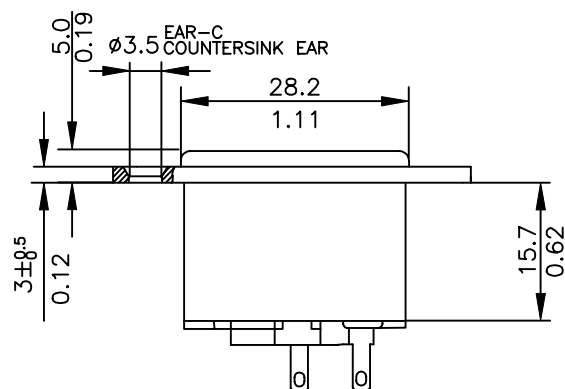

Panel Cutout

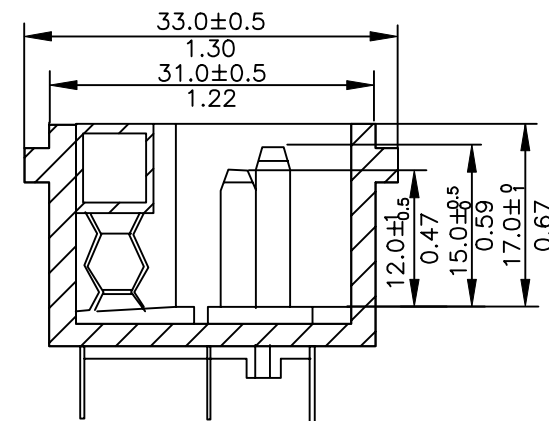

Max. Rating: 10A 250 Vac
Contact Resistance: <10 m OHM
Insulation Resistance: >10 M³ OHM
A.C. Breakdown:
Pole-Pole 5kV. Poles-Panel 4.0kV.
Operating Temperature: -40 °C to +70 °C
Max. Pin Temperature: +65 °C
Materials: Nylon, Flammability Rating UL 94 V-0
Contacts: Brass, Pins nickel plated, Tags tin plated,
NOTE: Dual Fuseholder, One Active, One Spare
Fuses Not Included - Recommended Size: 5 X 20mm

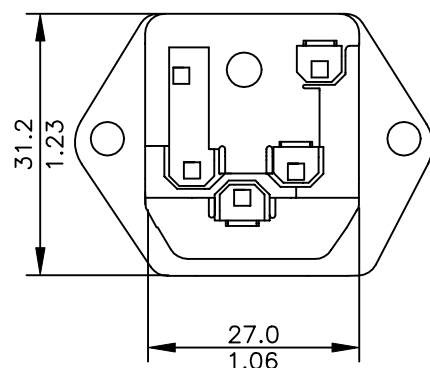

Dim range (mm)	Tolerance +/-(mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 719W-00/04		
0-1	0.15	Description: SCREW MOUNT INLET WITH FUSEHOLDER		
1-6	0.20			
6-18	0.30	Unit: $\frac{\text{mm}}{\text{Inch}}$	Rev B	
18-50	0.50			
50-120	0.70	Drawn/Date	Checked/Date	Approved/Date
120-250	0.90	B.ZHANG	PC/01-27-04	JJH/01-27-04
250-500	1.20	01-27-04		