


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

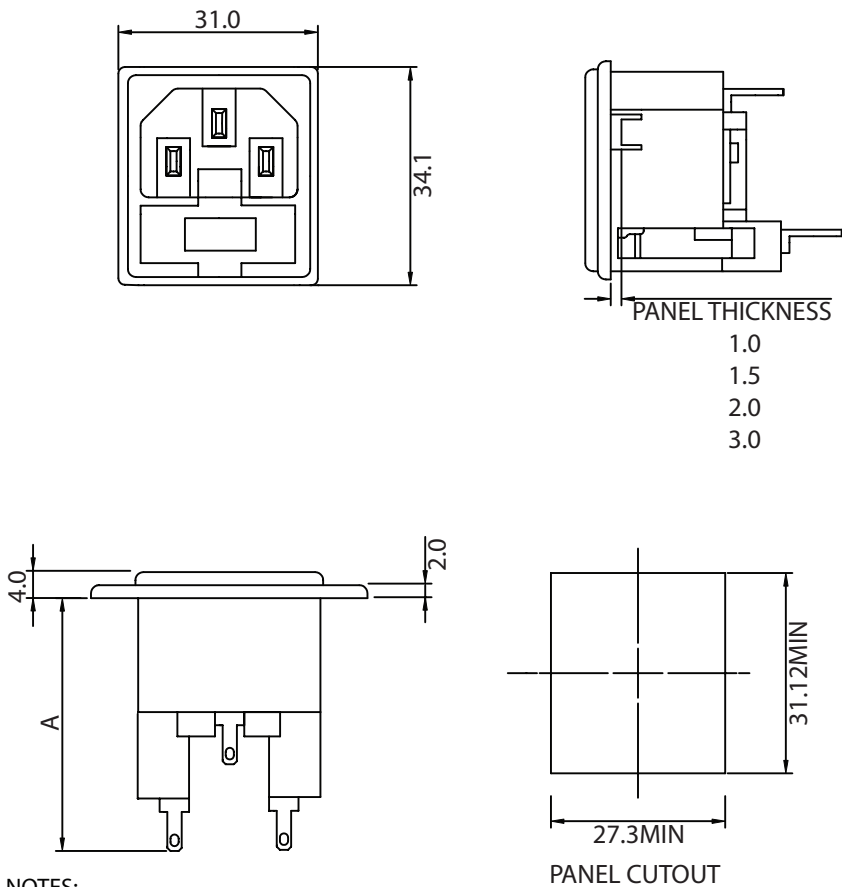

NOTES:


MATERIAL:

MOULDING: NYLON, FLAMMABILITY RATING UL 94V-0
CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED
RATING: 10A 250V AC
CONTACT RESISTANCE: <15m OHM(POLE)
INSULATION RESISTANCE: >10³ OHM AT 500V DC
AC BREAKDOWN:
POLE-POLE: 6kV
POLES-PANEL: 5.0kV
OPERATING TEMPERATURE: -20° C TO +70° C
MAX. PIN TEMPERATURE: +65° C
DOUBLE FUSED 5x20mm
APPROVALS: UL,CSA,VDE
RoHS COMPLIANT

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

PART NO.	DIM A	TERMINAL
723A-**-28	38.0	2
723A-**-48	39.0	4
723A-**-63	39.0	5

** DENOTES PANEL THICKNESS

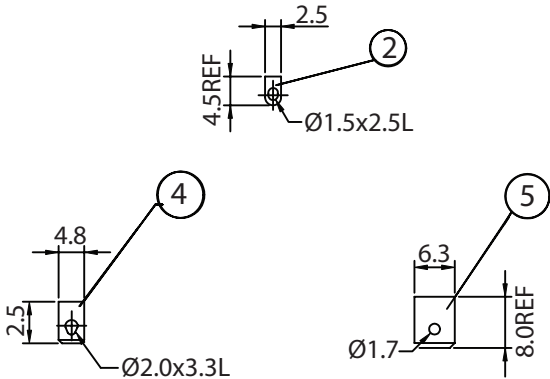

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 723A SERIES	RoHS Compliant	
0-1	0.15	Description: AC RECEPTACLE		
1-6	0.20			
6-18	0.30		UNIT: mm	REV. B
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Zhang 12-30-02	12-30-02	JJH / 12-30-02
250-500	1.20			