

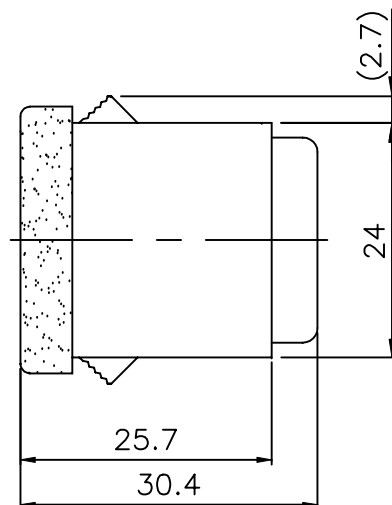




RECOMMENDED PANEL CUTOUT
RECOMMENDED TO USE 12&14 AWG
PANNEL THICKNESS 0.8~1.8mm

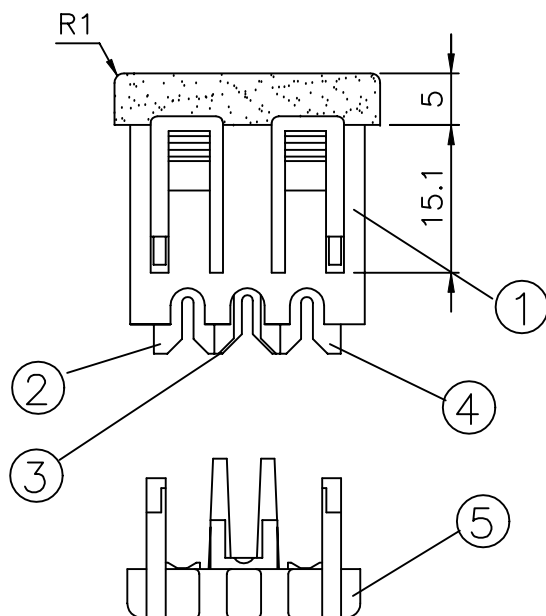

15A 125V AC

UL CSA

NOTE: PRODUCT SHIPPED UNASSEMBLED

5	Cover back of the Body,NYLON Black Color.	1
4	Contact PIN Bronze Strip t=0.4mm Cu	1
3	Contact PIN Bronze Strip t=0.4mm Cu	1
2	Contact PIN Bronze Strip t=0.4mm Ni-Plated	1
1	Body Insulator NYLON UL94V0 Black Color	1

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION	
		Part Number: 739W-X2/03	
0-1	0.15	Description: SNAP-IN NEMA 5-15R	
1-6	0.20		
6-18	0.30	Rev A	
18-50	0.50		
50-120	0.70	Drawn/Date	Checked/Date
120-250	0.90	B.ZHANG	LG/11-14-03
250-500	1.20	11-14-02	JJH/11-14-03