
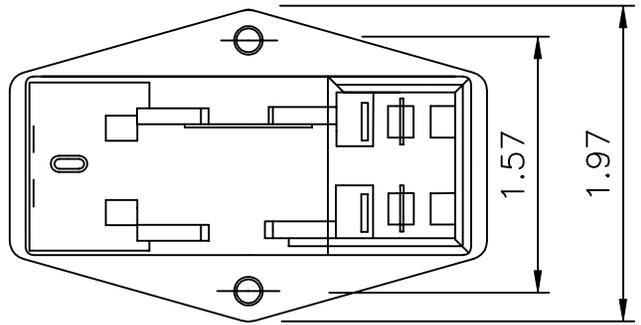
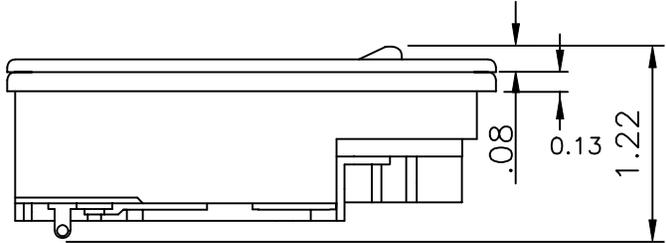


		Revision		
Rev.	Description	Date	Approved	

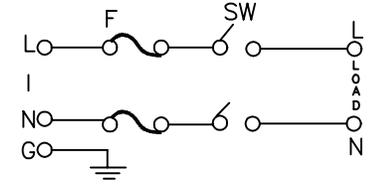

Electrical Characteristics:

- Voltage Rating250V AC
- Current Rating AT 250V AC.....10 A RMS MAX
- HIPOT Rating (For One Minute)
 - A. Line To Ground 2000V AC
 - B. Line To Line 2000V AC
- Minimum Insulation Resistance: @ 500V DC
 - A: Line & Neutral To Ground 100M OHM.
 - B: Line To Neutral 100M OHM.
- Ambient Temperature 25°C
- Operating Temperature-25°C To +85°C
- Safety Approval:
- Rated Current:
 - UL / CSA / VDE @ 250 VAC.....10 AMP
- DPST Power Switch:
 - UL / CSA @ 250 VAC.....10 AMP
 - VDE @ 250 VAC.....10 AMP
- Double 5X20mm Fuseholder, Plastic Case
- Solder Tab Terminals
- Flammability Class UL94V-0

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 764-00/002		
0-1	0.15	Description: MULTI-FUNCTION MODULE		
1-6	0.20	Unit: In	Rev A	
6-18	0.30		Drawn/Date	Checked/Date
18-50	0.50	B.ZHANG		
50-120	0.70		09-24-03	
120-250	0.90			
250-500	1.20			