

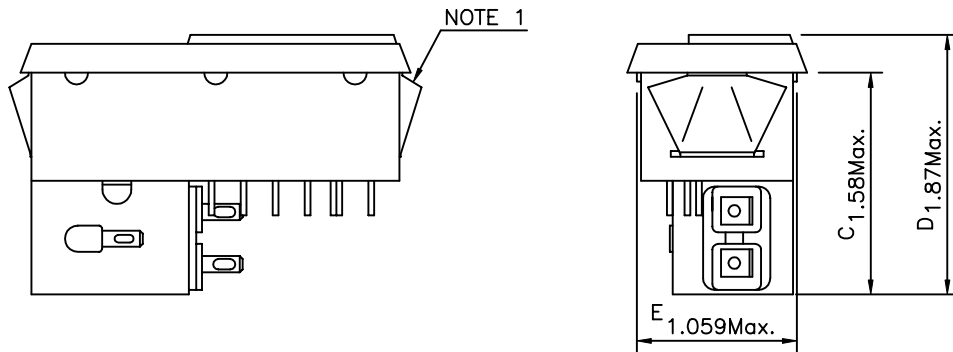


PHYSICAL DIMENSIONS:

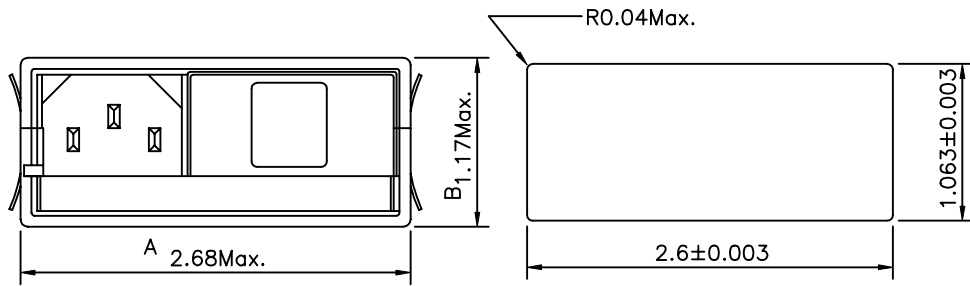

SCHEMATIC:

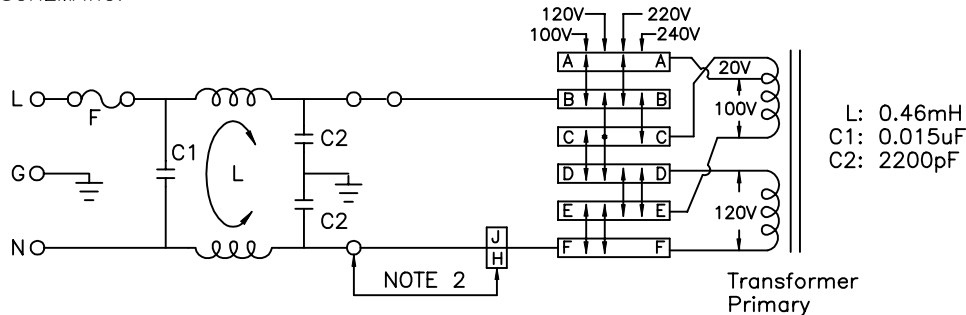

NOTES:

- STANDARD UNITS MOUNT PANEL THICKNESS 0.04 TO 0.063 INCH, SPECIAL UNITS MOUNT PANEL THICKNESS 0.06 TO 0.09 INCH.
- JUMPER REQUIRED IF ONLY SPST POWER SWITCH IS USED.

Revision			
Rev.	Description	Date	Approved

1. ELECTRICAL CHARACTERISTICS:

- VOLTAGE RATING 115/250VAC
- CURRENT RATING
 - AT 115VAC 6 A RMS Max.
 - AT 250VAC 6 A RMS Max.
- OPERATING FREQUENCY..... 50/60 Hz
- LEAKAGE CURRENT: EACH LINE TO GROUND
 - @115VAC 60Hz 0.25 mA Max.
 - @250VAC 50Hz 0.45 mA Max.
- HIPOT RATING (FOR ONE MINUTE)
 - LINE TO GROUND 2250VDC
 - LINE TO LINE 1450VDC
- TEMPERATURE RANGE: -25 TO +85 DEGREE C
- MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	5	9	20	25	40	45	45
DIF. MODE dB	/	/	/	/	/	/	/	/	/

1-8. SAFETY



Dim range (mm)		Qualtek Electronics Corp.		
		PPC DIVISION		
0-1	0.15	Part Number: 861-06/001		
1-6	0.20	Description: EMI FILTER		
6-18	0.30	UNIT: INCH		
18-50	0.50			
50-120	0.70	Drawn/Date	Checked/Date	Approved/Date
120-250	0.90	B.ZHANG	01-16-03	JJH/01-16-03
250-500	1.20	01-16-03		