




# TestPro

## Cable assemblies

 [Take advantage of navigation shortcuts](#)

[Click here for Table of Contents](#)  
[Click here for Index by P/N](#)

**RADIALL**   
The next connexion

# COMPANY PROFILE

*Radiall was founded in 1952 as a family owned company making coaxial plugs for the television industry. Today, Radiall is an international and global manufacturer of interconnect components including RF coaxial connectors and cable assemblies, antennas, fiber optic and microwave components, and multipin connectors. Radiall serves the Aerospace, Automotive, Defense, Industrial, Medical, Space, and Telecommunication industries.*

## QSE (Quality Safety Environment) POLICY

Radiall maintains a quality management system that is highly recognized by its customers because it conforms to most international standards, including those for environmental protection.



Since 1994, all Radiall sites are ISO9001 certified. As a result of Radiall's continuous improvement efforts, some dedicated activities are certified to either AS9100, or TS 16949 or ISO14001. Certain product lines are MIL ESA/SCC Qualified products.

Radiall also complies with other industry directives such as RoHS for hazardous substance restrictions and EuP for environmentally friendly designs for energy-consuming products.



## A WORLDWIDE ENGINEERING & MANUFACTURING CAPABILITY



Technical information and sales contacts are available at : [www.radiall.com](http://www.radiall.com)

With expertise centers and manufacturing locations in 3 continents and 12 industrial sites, Radiall offers its customers the proximity needed to provide the best quality, service and delivery performance.

Our facilities feature state of the art equipment for the many technologies involved in the design, manufacturing and assembly of interconnect solutions. Manufacturing plants based in low cost countries give Radiall the opportunity to offer quality at competitive prices.

 **Click on any line to go to the page.**



| <b>General information</b>                   | <b>Page</b> |
|--|-------------|
| Introduction .....                           | 4           |
| Design .....                                 | 5           |
| <br><b>Characteristics</b>                   |             |
| TestPro 4.2 Bench test cable.....            | 6           |
| TestPro 3 Bench test cable.....              | 7           |
| TestPro 3 Low Profile test cable.....        | 8           |
| TestPro 5 Ultra Low Loss .....               | 9           |
| TestPro 8 Ultra Low Loss .....               | 10          |
| <br><b>TestPro Standard assembly lengths</b> |             |
| TestPro 4.2 Phase Stable .....               | 11          |
| TestPro 5 & 8 Ultra Low Loss .....           | 12          |
| <br><b>TestPro custom assemblies</b>         |             |
| How to order .....                           | 13          |
| Aarmor option .....                          | 14          |
| Connectors for TestPro 4.2 .....             | 15          |
| Connectors for TestPro 3 .....               | 16          |
| Connectors for TestPro 3 Low Profile.....    | 17          |
| Connectors for TestPro 5.....                | 18          |
| Connectors for TestPro 8 .....               | 20          |
| Accessories .....                            | 22          |



The TestPro product range is dedicated to **Test and Measurement applications** requiring excellent electrical performance, high mechanical endurance and excellent resistance to wear and corrosion. We offer 2 product categories to meet your needs:

- **TestPro 4.2 and TestPro 3 « Phase Stable »** are suitable for test benches in production or labs due to its long life and stability in dynamic use.
- **TestPro 5 & 8 « Ultra low loss »** allow the use of long length cables with remote test stations and anechoic chambers. Their high stability with temperature makes them easy to use in temperature chambers. They are also suitable for high power applications.

Our TestPro product range is designed to operate in the DC - 26.5 GHz frequency range depending on connector and cable choice.

Our optional protective jacket "ProJack" protect lab cable assemblies for greater life time. It is also dedicated for all defense systems tests running outdoors.

All components are designed and manufactured by RADIALl in facilities operated under ISO9001-V2000/ASN9100 quality standards.

## ONLINE WEBTOOL FOR QUICK SERVICE

To access our online tools and build your desired cable assembly, go to [www.radiall.com/cableassembly](http://www.radiall.com/cableassembly)

Select our «Test & Measurement» tool for TestPro cable assemblies.

This tool enables you to select from a list of standard assembly lengths and part numbers or to build your own TestPro assembly by selecting cable and connectors that meet your needs. The TestPro tool also provides the performance of the desired cable assembly.

### OPTION 1:

- Select standard assembly lengths
- View performance

### OPTION 2:

- Build your assembly
- Calculate performance



[www.radiall.com](http://www.radiall.com)



## CABLE DESIGN and MANUFACTURING

The TestPro cable range benefits from Radiall's 30 years of experience in manufacturing high tech microwave cables for the military and aerospace markets. TestPro cables were designed to meet test and measurement specific requirements.

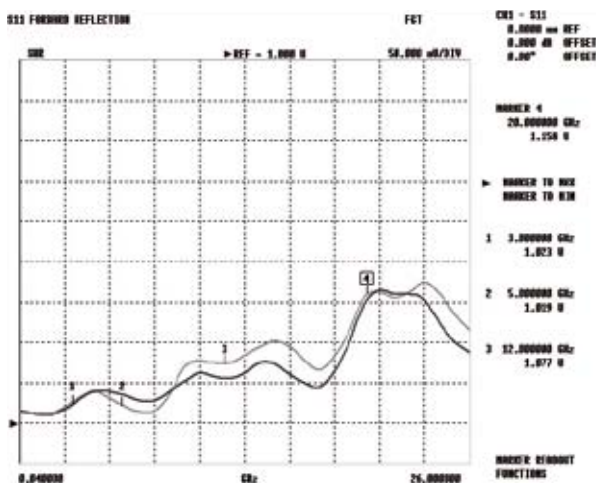
Radiall manufactures its own cable using proprietary braiding machines. Low density PTFE tape wrapping is the heart of our process. It elevates our Ultra Low Loss TestPro cable to a position of best performance in the market.

Our expertise in high precision multilayer braiding and wrapping makes the TestPro cable range stable over thousands of bending life cycles.

## 5000 MATING CYCLES GUARANTEED

TestPro cable assemblies for test applications were developed using new highly ruggedized stainless steel connectors. Our TestPro connectors are extremely robust. The combination of higher grade stainless steel and a unique attachment method offers a very reliable product over multiple matings.

Performance after 5,000 matings



- Low contact resistance variation
- < 0.3 mΩ
- VSWR 1.11 at 18 GHz

## CONNECTOR ATTACHMENT

The connector attachment is the main weakness when using standard cable assemblies in test and measurement applications.

Radiall TestPro connectors are designed with a unique attachment process which elevates the assembly ruggedness, provides high electrical stability and a very long life.

## CONSTRUCTION / DIMENSIONS

|                  | material                  | mm        | inches     |
|------------------|---------------------------|-----------|------------|
| center conductor | solid SPCC <sup>(1)</sup> | -         | -          |
| dielectric       | solid PTFE <sup>(2)</sup> | -         | -          |
| inner shield     | flat SPC tape             | -         | -          |
| interlayer       | Aluminum-Polyimide tape   | -         | -          |
| outer shield     | round SPC braid           | -         | -          |
| jacket           | clear FEP <sup>(3)</sup>  | max. 4.81 | max. 0.190 |

<sup>(1)</sup> SPCC = Silver Plated Copper Clade Steel

<sup>(2)</sup> PTFE = Poly TetraFluoroEthylene

<sup>(3)</sup> FEP = Fluorinated Ethylene Propylene

## ELECTRICAL CHARACTERISTICS

|                                     |                                  |                       |
|-------------------------------------|----------------------------------|-----------------------|
| characteristic impedance            | 50 ohms ± 2 ohms                 |                       |
| operating frequency range           | DC - 20 GHz                      |                       |
| cut-off frequency                   | 34 GHz                           |                       |
| screening effectiveness             | > 100 dB (at 18 GHz)             |                       |
| velocity of propagation             | 71 %                             |                       |
| propagation time                    | 4.75 ns / m                      | 4.75 ns / ft          |
| capacitance                         | 95 pF / m (at 1 GHz)             | 29 pF / ft (at 1 GHz) |
| insulation resistance               | > 3 x 10 <sup>5</sup> MOhm / m   |                       |
| nominal phase                       | 1645 ° / m / GHz                 |                       |
| phase stability with bending*       | < 0.17° / 360° / GHz (at 18 GHz) |                       |
| attenuation stability with bending* | < 0.015 dB (at 18 GHz)           |                       |
| attenuation stability with shaking  | < 0.01 dB/m (at 18 GHz)          |                       |

\* = the cable is coiled up 10 times onto a mandrel of 100 mm (3.94") diameter.

## MECHANICAL CHARACTERISTICS

|                             |                  |            |
|-----------------------------|------------------|------------|
| maximum weight              | 60g / m          | 18.3g / ft |
| recommend. min. bend radius | 25 mm            | 0.98 inch  |
| crush resistance            | > 2300N / 100 mm |            |

## ENVIRONMENTAL CHARACTERISTICS

|                             |               |               |
|-----------------------------|---------------|---------------|
| operating temperature range | -55 / +200° C | -67 / +392° C |
| fire resistance             | yes           |               |
| halogen free jacket         | no            |               |

## FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (sea level / 25° C)

| GHz                            | dB / m                             | dB / ft | Watts |
|--------------------------------|------------------------------------|---------|-------|
| 1.0                            | 0.41                               | 0.12    | 550   |
| 2.0                            | 0.60                               | 0.18    | 295   |
| 4.0                            | 0.87                               | 0.26    | 210   |
| 8.0                            | 1.29                               | 0.39    | 150   |
| 12.4                           | 1.67                               | 0.51    | 120   |
| 18.0                           | 2.10                               | 0.64    | 95    |
| 20.0                           | 2.24                               | 0.68    | 80    |
| attenuation calculation (dB/m) | (0.384 x √F GHz) + (0.026 x F GHz) |         |       |

Note: typical attenuation for two connectors (dB) = 0.0447 x √F GHz + 0.04



Radial P/N : F1100001

## APPLICATION NOTE

TestPro 4.2 is a high frequency microwave cable that delivers good attenuation characteristics. This low loss triple-shielded cable provides the best combination of low attenuation and VSWR/loss/phase stability when compared to similar size flexible cables. The TestPro 4.2 rugged structure is perfectly adapted for dynamic applications such as laboratory measurements when assembled with TestPro connectors.

**CONSTRUCTION / DIMENSIONS**

|                   | material                |
|-------------------|-------------------------|
| center conductor  | SPCCS <sup>(1)</sup>    |
| dielectric        | PTFE <sup>(2)</sup>     |
| electrical shield | SPC <sup>(3)</sup>      |
| interlayer        | Aluminum-polyimide      |
| inner braid       | SPC <sup>(3)</sup>      |
| inner jacket      | PFA <sup>(4)</sup>      |
| crush protection  | stainless steel         |
| strength braid    | stainless steel         |
| braid jacket      | PTFE <sup>(2)</sup>     |
| outer diameter    | 7,04 mm ( 0,277 inches) |

- <sup>(1)</sup> SPCCS = Silver Plated Copper Clad Steel
- <sup>(2)</sup> PTFE = PolyTetraFluoroEthylene
- <sup>(3)</sup> SPC = Silver Plated Copper
- <sup>(4)</sup> PFA = PerFluoroAlkoxy

**ELECTRICAL CHARACTERISTICS**

|  |   |                         |
|--|---|-------------------------|
| characteristic impedance               | 50 ohms ± 1 ohms  |                         |
| operating frequency range              | DC - 40 GHz   |                         |
| cut-off frequency                      | 44 GHz  |                         |
| screening effectiveness                | >100 dB at 1GHz; > 90 dB at 18 GHz                        |                         |
| velocity of propagation                | 76%   |                         |
| propagation time                       | 4.4 ns / m  | 1.3 ns / ft             |
| capacitance                            | 88 pF / m (at 1 GHz)                                      | 26.7 pF / ft (at 1 GHz) |
| insulation resistance                  | > 3 x 10 <sup>5</sup> MOhm / m                            |                         |
| Corona extinction voltage              | -   |                         |
| nominal phase                          | 1590 ° / m / GHz  |                         |
| phase stability with temperature       | < 4 ° / m / GHz ; <2820ppm (-55 / +125°C)                 |                         |
| phase stability with bending (**)      | 5° (at 40 GHz) Typ.                                       |                         |
| attenuation stability with bending(**) | < 0.1 dB (at 40 GHz)                                      |                         |
| attenuation stability with shaking     | < 0.03 dB/m (at 40 GHz)                                   |                         |
| atten. variation with temperature      | Att. (at X° C) = att. (at 20° C) x (1 + (X - 20) x 0,002) |                         |

(\*\*) 9.5° Max according to IEC966-1, bending method n°2

**MECHANICAL CHARACTERISTICS**

|                             |   |             |
|-----------------------------|---|-------------|
| maximum weight              | 150 g / m                                   | 46.3 g / ft |
| recommend. min. bend radius | 25 mm                                       | 0.984 inch  |
| crush resistance            | > 4,400 N / 100 mm (260 lb per linear inch) |             |
| Flex life cycle             | 20,000 (IEC 966-1 section 9.3)              |             |
| tensile strength            | 200 N                                       |             |

**ENVIRONMENTAL CHARACTERISTICS**

|  |  |                |
|--|--|----------------|
| operating temperature range <sup>(*)</sup> | -55 / +200 ° C                               | -67 / +392 ° F |
| fire resistance                            | yes (MIL C 87104)                            |                |
| abrasion resistance                        | yes (SAE AS5756, edge 0.5 mm, load 2 pounds) |                |
| halogen free jacket                        | no   |                |
| ROHS / REACH                               | yes  |                |

(\*) cable alone. Cable assembly operating temperature range is -55 / + 105 °C (-67 / +221°F)

**FREQUENCY / ATTENUATION (typ) / CW MAX POWER <sup>(\*)</sup>**

| GHz  | (dB/m) | (dB/ft) | Watts |
|------|--------|---------|-------|
| 1,0  | 0,39   | 0,12    | 400   |
| 2,0  | 0,56   | 0,17    | 280   |
| 4,0  | 0,81   | 0,25    | 200   |
| 6,0  | 1,01   | 0,31    | 160   |
| 8,0  | 1,19   | 0,36    | 140   |
| 12,4 | 1,53   | 0,46    | 120   |
| 18,0 | 1,91   | 0,58    | 90    |
| 26,5 | 2,41   | 0,73    | 80    |
| 40,0 | 3,11   | 0,94    | 60    |

attenuation calculation (dB/m) Typ: (0.365 x √ FGHz) + (0.02 x F GHz)

<sup>(\*)</sup> = CW max power calculated at sea level / 40°C and VSWR 1:1

Power ratings may be limited by the connector type. Please contact us for specific needs)

Note : typical attenuation for a couple of connectors (dB) = 0,0447 x √ F (GHz) + 0.04



**APPLICATION NOTE**

TestPro 3 is a 40GHz measurement cable. It combines electrical advantages and integrated protection system. These ruggedized assemblies offer excellent durability while remaining exceptionally flexible. Unique connector attachment system and strong cable structure provide high tensile stress resistance to the whole assembly.

**Key features & benefits**

- Phase and loss stable with flexure
- Crush, torque and tensile resistant
- Flexible
- Long service life
- Longer calibration intervals
- Easy to configure to DUT

Typical applications include : test labs, production floor testing, anechoic chambers, thermal vacuum chambers and nearfield scanners.

**CONSTRUCTION / DIMENSIONS**

|                   | material               |
|-------------------|------------------------|
| center conductor  | SPCCS <sup>(1)</sup>   |
| dielectric        | PTFE <sup>(2)</sup>    |
| electrical shield | SPC <sup>(3)</sup>     |
| interlayer        | Aluminum-polyimide     |
| strength braid    | SPC <sup>(3)</sup>     |
| outer jacket      | PFA <sup>(4)</sup>     |
| outer diameter    | 3,95 mm (0,156 inches) |

- <sup>(1)</sup> SPCCS = Silver Plated Copper Clad Steel
- <sup>(2)</sup> PTFE = PolyTetraFluoroEthylene
- <sup>(3)</sup> SPC = Silver Plated Copper
- <sup>(4)</sup> PFA = PerFluoroAlkoxy

**ELECTRICAL CHARACTERISTICS**

|  |   |                         |
|--|---|-------------------------|
| characteristic impedance               | 50 ohms ± 1 ohms  |                         |
| operating frequency range              | DC - 40 GHz   |                         |
| cut-off frequency                      | 44 GHz  |                         |
| screening effectiveness                | >100 dB at 1GHz; > 90 dB at 18 GHz                        |                         |
| velocity of propagation                | 76%   |                         |
| propagation time                       | 4.4 ns / m  | 1.3 ns / ft             |
| capacitance                            | 88 pF / m (at 1 GHz)                                      | 26.7 pF / ft (at 1 GHz) |
| insulation resistance                  | > 3 x 10 <sup>5</sup> MOhm / m                            |                         |
| Corona extinction voltage              | -   |                         |
| nominal phase                          | 1590 ° / m / GHz  |                         |
| phase stability with temperature       | < 4 ° / m / GHz ; <2820ppm (-55 / +125°C)                 |                         |
| phase stability with bending (**)      | 5° (at 40 GHz) Typ.                                       |                         |
| attenuation stability with bending(**) | < 0.1 dB (at 40 GHz)                                      |                         |
| attenuation stability with shaking     | < 0.03 dB/m (at 40 GHz)                                   |                         |
| atten. variation with temperature      | Att. (at X° C) = att. (at 20° C) x (1 + (X - 20) x 0,002) |                         |

(\*\*) 9,5° Max according to IEC966-1, bending method n°2

**MECHANICAL CHARACTERISTICS**

|                             |  |             |
|-----------------------------|--|-------------|
| maximum weight              | 50 g / m                                 | 15.3 g / ft |
| recommend. min. bend radius | 25 mm                                    | 0.984 inch  |
| crush resistance            | > 400 N / 100 mm (23 lb per linear inch) |             |
| Flex life cycle             | 20,000 (IEC 966-1 section 9.3)           |             |
| tensile strength            | 200 N                                    |             |

**ENVIRONMENTAL CHARACTERISTICS**

|  |                   |                |
|--|-------------------|----------------|
| operating temperature range <sup>(*)</sup> | -55 / +200 ° C    | -67 / +392 ° F |
| fire resistance                            | yes (MIL C 87104) |                |
| halogen free jacket                        | no                |                |
| ROHS / REACH                               | yes               |                |

(\*) cable alone. Cable assembly operating temperature range is -55 / + 105 °C (-67 / +221°F)

**FREQUENCY / ATTENUATION (typ) / CW MAX POWER <sup>(\*)</sup>**

| GHz                            | (dB/m)                                 | (dB/ft) | Watts |
|--------------------------------|--|---------|-------|
| 1,0                            | 0,39                                   | 0,12    | 400   |
| 2,0                            | 0,56                                   | 0,17    | 280   |
| 4,0                            | 0,81                                   | 0,25    | 200   |
| 6,0                            | 1,01                                   | 0,31    | 160   |
| 8,0                            | 1,19                                   | 0,36    | 140   |
| 12,4                           | 1,53                                   | 0,46    | 120   |
| 18,0                           | 1,91                                   | 0,58    | 90    |
| 26,5                           | 2,41                                   | 0,73    | 80    |
| 40,0                           | 3,11                                   | 0,94    | 60    |
| attenuation calculation (dB/m) | Typ: (0.365 x √ FGHz) + (0.02 x F GHz) |         |       |

(\*) = CW max power calculated at sea level / 40°C and VSWR 1:1

Power ratings may be limited by the connector type. Please contact us for specific needs

Note : typical attenuation for a couple of connectors (dB) = 0,0447 x √ F (GHz) + 0.04



**APPLICATION NOTE**

TestPro 3 is a 40GHz measurement cable. It combines electrical advantages and small form factor. These assemblies offer excellent durability while remaining exceptionally flexible. It is dedicated to connect to high density connectors panel. Unique connector attachment system and strong cable structure provide high tensile stress resistance to the whole assembly.

**Key features & benefits**

- Phase and loss stable with flexure
- Low Profile (assemblies max dia < 9 mm)
- Flexible
- Longer calibration intervals
- Easy to configure to DUT

Typical applications include : test labs, production floor testing, anechoic chambers, thermal vacuum chambers and nearfield scanners.



**CONSTRUCTION / DIMENSIONS**

|                  | material                        | mm        | inches     |
|------------------|---------------------------------|-----------|------------|
| center conductor | solid SPC <sup>(1)</sup>        | -         | -          |
| dielectric       | low density PTFE <sup>(2)</sup> | -         | -          |
| inner shield     | SPC tape                        | -         | -          |
| outer shield     | SPC braid                       | -         | -          |
| jacket           | green FEP <sup>(3)</sup>        | max. 5.85 | max. 0.230 |

- <sup>(1)</sup> SPC = Silver Plated Copper  
<sup>(2)</sup> PTFE = Poly TetraFluoroEthylene  
<sup>(3)</sup> FEP = Fluorinated Ethylene Propylene

**ELECTRICAL CHARACTERISTICS**

|                                    |   |                         |
|------------------------------------|---|-------------------------|
| characteristic impedance           | 50 ohms ± 1 ohms  |                         |
| operating frequency range          | DC - 26.5 GHz   |                         |
| cut-off frequency                  | 31 GHz  |                         |
| screening effectiveness            | > 90 dB (at 18 GHz)                                     |                         |
| velocity of propagation            | 85 %  |                         |
| propagation time                   | 3.9 ns / m  | 1.2 ns / ft             |
| capacitance                        | 79 pF / m (at 1 GHz)                                    | 23.9 pF / ft (at 1 GHz) |
| insulation resistance              | > 3 x 10 <sup>5</sup> MOhm / m                          |                         |
| Corona extinction voltage          | > 2.3 kV  |                         |
| nominal phase                      | 1400 ° / m / GHz  |                         |
| phase stability with temperature   | < 1° / m / GHz (-55 / +100°C)                           |                         |
| phase stability with bending       | < 0.4° / 360° / GHz                                     |                         |
| attenuation stability with bending | < 0.05 dB (at 18 GHz) / < 0.1 dB (at 26.5 GHz)          |                         |
| attenuation stability with shaking | < 0.01 dB/m (at 18 GHz) / < 0.015 dB/m (at 26.5 GHz)    |                         |
| atten. variation with temperature  | Att. (at X° C) = att. (at 20° C) x 1 + (X - 20) x 0,002 |                         |



Radiall P/N : F1703159GR

**MECHANICAL CHARACTERISTICS**

|                             |                 |            |
|-----------------------------|-----------------|------------|
| maximum weight              | 73g / m         | 22.1g / ft |
| recommend. min. bend radius | 25 mm           | 0.984 inch |
| crush resistance            | > 700N / 100 mm |            |

**ENVIRONMENTAL CHARACTERISTICS**

|                             |                   |               |
|-----------------------------|-------------------|---------------|
| operating temperature range | -70 / +200° C     | -94 / +392° C |
| fire resistance             | yes (MIL C 87104) |               |
| halogen free jacket         | no                |               |

**APPLICATION NOTE**

This Ultra-low loss cable is fully adapted to laboratory applications. It can be reinforced with "ProJack" protective jacket for high mechanical stress applications.

**Main benefits:**

- ultra-low loss
- high electrical stability with bending and temperature
- high phase stability with temperature
- strain relief
- high mechanical strength and crush resistance
- broad range of connectors available

**FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (\*)**

| GHz                            | dB / m                            | dB / ft | Watts |
|--------------------------------|-----------------------------------|---------|-------|
| 1.0                            | 0.23                              | 0.07    | 850   |
| 2.0                            | 0.32                              | 0.10    | 600   |
| 4.0                            | 0.46                              | 0.14    | 420   |
| 6.0                            | 0.57                              | 0.17    | 340   |
| 8.0                            | 0.66                              | 0.20    | 300   |
| 10.0                           | 0.75                              | 0.23    | 270   |
| 12.4                           | 0.84                              | 0.25    | 240   |
| 18.0                           | 1.02                              | 0.31    | 200   |
| 26.5                           | 1.27                              | 0.38    | 190   |
| attenuation calculation (dB/m) | (0.22 x √f GHz) + (0,005 x F GHz) |         |       |

(\*) = CW max power calculated at sea level / 40°C and VSWR 1:1 (Cable-assembly power ratings may be limited by the connector type. Please contact us for specific needs).  
 Note: typical attenuation for two connectors (dB) = 0.045 x √f GHz + 0.04

# CHARACTERISTICS



## CONSTRUCTION / DIMENSIONS

|                  | material                        | mm        | inches     |
|------------------|---------------------------------|-----------|------------|
| center conductor | solid SPC <sup>(1)</sup>        | -         | -          |
| dielectric       | low density PTFE <sup>(2)</sup> | -         | -          |
| inner shield     | SPC tape                        | -         | -          |
| outer shield     | SPC braid                       | -         | -          |
| jacket           | green FEP <sup>(3)</sup>        | max. 8.50 | max. 0.335 |

- <sup>(1)</sup> SPC = Silver Plated Copper
- <sup>(2)</sup> PTFE = Poly TetraFluoroEthylene
- <sup>(3)</sup> FEP = Fluorinated Ethylene Propylene

## ELECTRICAL CHARACTERISTICS

|                                    |   |                         |
|------------------------------------|---|-------------------------|
| characteristic impedance           | 50 ohms ± 1 ohms  |                         |
| operating frequency range          | DC - 18 GHz   |                         |
| cut-off frequency                  | 20 GHz  |                         |
| screening effectiveness            | > 90 dB (at 18 GHz)                                     |                         |
| velocity of propagation            | 85 %  |                         |
| propagation time                   | 3.9 ns / m  | 1.2 ns / ft             |
| capacitance                        | 79 pF / m (at 1 GHz)                                    | 23.9 pF / ft (at 1 GHz) |
| insulation resistance              | > 3 x 10 <sup>5</sup> MOhm / m                          |                         |
| Corona extinction voltage          | > 3.3 kV  |                         |
| nominal phase                      | 1400 ° / m / GHz  |                         |
| phase stability with temperature   | < 1° / m / GHz (-55 / +100°C)                           |                         |
| phase stability with bending       | < 0.4° / 360° / GHz                                     |                         |
| attenuation stability with bending | < 0.05 dB (at 18 GHz)                                   |                         |
| attenuation stability with shaking | < 0.01 dB/m (at 18 GHz)                                 |                         |
| atten. variation with temperature  | Att. (at X° C) = att. (at 20° C) x 1 + (X - 20) x 0,002 |                         |



Radiall P/N : F1703160GR

## MECHANICAL CHARACTERISTICS

|                             |                  |            |
|-----------------------------|------------------|------------|
| maximum weight              | 155g / m         | 47.0g / ft |
| recommend. min. bend radius | 40 mm            | 1.575 inch |
| crush resistance            | > 1000N / 100 mm |            |

## ENVIRONMENTAL CHARACTERISTICS

|                             |                   |               |
|-----------------------------|-------------------|---------------|
| operating temperature range | -70 / +200° C     | -94 / +392° C |
| fire resistance             | yes (MIL C 87104) |               |
| halogen free jacket         | no                |               |

### APPLICATION NOTE

This Ultra-low loss cable is fully adapted to laboratory applications. It can be reinforced with "ProJack" protective jacket for high mechanical stress applications.

#### Main benefits:

- ultra-low loss
- high electrical stability with bending and temperature
- high phase stability with temperature
- strain relief
- high mechanical strength and crush resistance
- broad range of connectors available

## FREQUENCY / ATTENUATION (typ.) / CW MAX POWER (\*)

| GHz                            | dB / m                            | dB / ft | Watts |
|--------------------------------|-----------------------------------|---------|-------|
| 1.0                            | 0.15                              | 0.04    | 1600  |
| 2.0                            | 0.21                              | 0.06    | 1100  |
| 3.0                            | 0.26                              | 0.08    | 920   |
| 4.0                            | 0.30                              | 0.09    | 800   |
| 5.0                            | 0.34                              | 0.10    | 710   |
| 6.0                            | 0.37                              | 0.11    | 650   |
| 8.0                            | 0.44                              | 0.13    | 560   |
| 10.0                           | 0.49                              | 0.15    | 500   |
| 12.4                           | 0.55                              | 0.17    | 450   |
| 18.0                           | 0.68                              | 0.21    | 380   |
| attenuation calculation (dB/m) | (0.14 x √F GHz) + (0,005 x F GHz) |         |       |

(\*) = CW max power calculated at sea level / 40°C and VSWR 1:1 (Cable-assembly power ratings may be limited by the connector type. Please contact us for specific needs).

Note: typical attenuation for two connectors (dB) = 0.0447 x √F GHz + 0.04

## PHASE STABLE TEST BENCH CABLE ASSEMBLIES

TestPro 4.2 standard assemblies meet the most common requested configurations suitable for test benches in production or labs due to their very long life and great stability in dynamic use.

In order to receive optimized service and price, select from the list of existing part numbers.

| Part Number | Model      |            | Length |                   | Attenuation-Nom<br>at 2GHz - at 18GHz | VSWR-Nom<br>at 18GHz |
|-------------|------------|------------|--------|-------------------|---------------------------------------|----------------------|
| R288940034  | SMA male   | SMA male   | 24 in. |                   | 0.47 dB - 1.51 dB                     | 1.20                 |
| R288940001  | SMA male   | SMA male   | 36 in. |                   | 0.65 dB - 2.15 dB                     | 1.20                 |
| R288940002  | SMA male   | SMA male   | 48 in. |                   | 0.83 dB - 2.79 dB                     | 1.20                 |
| R288940003  | SMA male   | SMA male   | 72 in. |                   | 1.19 dB - 4.06 dB                     | 1.20                 |
| R288940035  | SMA male   | N Type (*) | 24 in. |                   | 0.47 dB - 1.51 dB                     | 1.20                 |
| R288940004  | SMA male   | N Type (*) | 36 in. |                   | 0.65 dB - 2.15 dB                     | 1.25                 |
| R288940005  | SMA male   | N Type (*) | 48 in. |                   | 0.83 dB - 2.79 dB                     | 1.25                 |
| R288940006  | SMA male   | N Type (*) | 72 in. |                   | 1.19 dB - 4.06 dB                     | 1.25                 |
| R288940007  | N Type (*) | N Type (*) | 36 in. |                   | 0.65 dB - 2.15 dB                     | 1.25                 |
| R288940008  | N Type (*) | N Type (*) | 48 in. |                   | 0.83 dB - 2.79 dB                     | 1.25                 |
| R288940009  | N Type (*) | N Type (*) | 72 in. |                   | 1.19 dB - 4.06 dB                     | 1.25                 |
| R288940010  | PC7        | PC7        | 36 in. |                   | 0.65 dB - 2.15 dB                     | 1.30                 |
| R288940011  | PC7        | PC7        | 48 in. |                   | 0.83 dB - 2.79 dB                     | 1.30                 |
| R288940012  | PC7        | PC7        | 72 in. |                   | 1.19 dB - 4.06 dB                     | 1.30                 |
| R288940013  | PC7        | SMA male   | 36 in. |                   | 0.65 dB - 2.15 dB                     | 1.30                 |
| R288940014  | PC7        | SMA male   | 48 in. |                   | 0.83 dB - 2.79 dB                     | 1.30                 |
| R288940015  | PC7        | SMA male   | 72 in. |                   | 1.19 dB - 4.06 dB                     | 1.30                 |
| R288940016  | PC7        | N Type (*) | 36 in. |                   | 0.65 dB - 2.15 dB                     | 1.30                 |
| R288940017  | PC7        | N Type (*) | 48 in. | 0.83 dB - 2.79 dB | 1.30                                  |                      |
| R288940018  | PC7        | N Type (*) | 72 in. | 1.19 dB - 4.06 dB | 1.30                                  |                      |

All TestPro cable assemblies are delivered in individual packaging with attached test report.

\* One turn precision N Type connector

## VSWR AND POWER HANDLING

| VSWR<br>max | 0-4 GHz |    | 4-8 GHz |    | 8-12.4 GHz |    | 12.4-18 GHz |    | 18-20 GHz |    |
|-------------|---------|----|---------|----|------------|----|-------------|----|-----------|----|
|             | VSWR    | dB | VSWR    | dB | VSWR       | dB | VSWR        | dB | VSWR      | dB |
| 2 x SMA     | 1.12    | 25 | 1.20    | 21 | 1.20       | 21 | 1.25        | 19 | 1.27      | 18 |
| 2 x N       | 1.15    | 23 | 1.25    | 19 | 1.25       | 19 | 1.30        | 18 | -         | -  |
| 2 x PC7     | 1.25    | 19 | 1.30    | 18 | 1.30       | 18 | 1.35        | 16 | -         | -  |

This table gives values for assembly lengths between 200 to 5000 mm (8 to 196 in.)

| MAXIMUM POWER HANDLING | VHF/UHF | L Band | S Band | C Band | X Band   | Ku Band | K Band |          |
|------------------------|---------|--------|--------|--------|----------|---------|--------|----------|
|                        | 1 GHz   | 2 GHz  | 4 GHz  | 8 GHz  | 12,4 GHz | 18 GHz  | 20 GHz | 26,5 GHz |
| 20°C, SEA LEVEL (W)    |         |        |        |        |          |         |        |          |
| 2 x SMA                | 550     | 295    | 210    | 150    | 115      | 80      | 70     | -        |
| 2 x N                  | 550     | 295    | 210    | 150    | 115      | 80      | -      | -        |
| 2 x PC7                | 550     | 295    | 210    | 150    | 115      | 80      | -      | -        |

## TEMPERATURE DERATING

Attenuation at X°C = Attenuation (20°C) x (1 + (X - 20) x q). Ex: q = 0.002 for copper and silver

## ULTRA LOW LOSS TEST AND MEASUREMENT CABLE ASSEMBLIES

TestPro 5 and TestPro 8 standard assemblies are required when loss become an issue. Their high stability with temperature make them easy to use in temperature chambers. They are also suitable for high power applications.

In order to receive optimized service and price, select from the list of existing part numbers.

| Part Number      | Model    |          | Length   |  | Attenuation-Nom<br>at 2GHz - at 18GHz | VSWR-Nom<br>at 18GHz |
|------------------|----------|----------|----------|--|---------------------------------------|----------------------|
| <b>TestPro 5</b> |          |          |          |  |                                       |                      |
| R288931001       | SMA male | SMA male | 39.4 in. |  | 0.42 dB - 1.25 dB                     | 1.20                 |
| R288931002       | N Type   | N Type   | 39.4 in. |  | 0.42 dB - 1.25 dB                     | 1.25                 |
| R288931003       | N Type   | SMA male | 39.4 in. |  | 0.42 dB - 1.25 dB                     | 1.25                 |
| <b>TestPro 8</b> |          |          |          |  |                                       |                      |
| R288931004       | SMA male | SMA male | 39.4 in. |  | 0.31 dB - 0.91 dB                     | 1.25                 |
| R288931005       | N Type   | N Type   | 39.4 in. |  | 0.31 dB - 0.91 dB                     | 1.25                 |
| R288931006       | N Type   | SMA male | 39.4 in. |  | 0.31 dB - 0.91 dB                     | 1.25                 |

All TestPro cable assemblies are delivered in individual packaging with attached test report.

## VSWR AND POWER HANDLING

| VSWR max         | 0-4 GHz |    | 4-8 GHz |    | 8-12.4 GHz |    | 12.4-18 GHz |    | 18-26.5 GHz |    |
|------------------|---------|----|---------|----|------------|----|-------------|----|-------------|----|
|                  | VSWR    | dB | VSWR    | dB | VSWR       | dB | VSWR        | dB | VSWR        | dB |
| <b>TestPro 5</b> |         |    |         |    |            |    |             |    |             |    |
| 2 x SMA          | 1.15    | 23 | 1.20    | 21 | 1.20       | 21 | 1.25        | 19 | 1.27        | 18 |
| 2 x TNC          | 1.20    | 21 | 1.30    | 18 | 1.30       | 18 | 1.35        | 17 | -           | -  |
| 2 x N            | 1.20    | 21 | 1.25    | 19 | 1.25       | 19 | 1.30        | 18 | -           | -  |
| <b>Testpro 8</b> |         |    |         |    |            |    |             |    |             |    |
| 2 x SMA          | 1.15    | 23 | 1.20    | 21 | 1.20       | 21 | 1.25        | 19 | -           | -  |
| 2 x TNC          | 1.20    | 21 | 1.30    | 18 | 1.30       | 18 | 1.35        | 17 | -           | -  |
| 2 x N            | 1.20    | 21 | 1.25    | 19 | 1.25       | 19 | 1.30        | 18 | -           | -  |

This table gives value for assembly lengths between 200 to 5000 mm (8 to 196 in.)

| MAXIMUM POWER HANDLING,<br>20°C, SEA LEVEL (W) |         | VHF/UHF | L Band | S Band | C Band | X Band   | Ku Band | K Band |          |
|--|---------|---------|--------|--------|--------|----------|---------|--------|----------|
|  |         | 1 GHz   | 2 GHz  | 4 GHz  | 8 GHz  | 12.4 GHz | 18 GHz  | 20 GHz | 26.5 GHz |
| Testpro 5                                      | 2 x SMA | 450     | 330    | 240    | 180    | 145      | 130     | 120    | 105      |
|  | 2 x N   | 495     | 360    | 270    | 200    | 160      | 140     | -      | -        |
|  | 2 x PC7 | 750     | 520    | 360    | 250    | 200      | 160     | -      | -        |
| TestPro 8                                      | 2 x SMA | 520     | 390    | 280    | 210    | 170      | 145     | -      | -        |
|  | 2 x N   | 585     | 430    | 315    | 235    | 195      | 160     | -      | -        |
|  | 2 x PC7 | 870     | 610    | 420    | 300    | 235      | 200     | -      | -        |

## TEMPERATURE DERATING

Attenuation at X°C = Attenuation (20°C) x (1 + (X - 20) x q). Ex: q = 0.002 for copper and silver

Many applications require specific assemblies. The Radiall TestPro range is available in custom lengths and configurations. Use the following pages to select cable and connectors to meet your needs and send us your request for quotation.

## HOW TO ORDER

### Select the right TestPro cable.

- TestPro 4.2 “Phase Stable” is suitable for test benches in production or labs due to its long life and great stability in dynamic use.
- TestPro 5 & 8 “Ultra Low Loss” allows the use of long length cables with remote test stations and anechoic chambers. Their high stability with temperature makes them easy to use in temperature chambers. They are also suitable for high power applications.

| Properties                        | TestPro 4.2    | TestPro 5   | TestPro 8        |
|-----------------------------------|----------------|---|------------------|
|                                   | Phase Stable   | Ultra Low Loss  |                  |
| Frequency range                   | DC - 20GHz     | DC - 26.5GHz  | DC - 18GHz       |
| Impedance                         | 50 Ω ± 2 Ω     | 50 Ω ± 1 Ω  | 50 Ω ± 1 Ω       |
| IL (dB/m at 2 GHz - at 18 GHz)    | 0.54 - 1.90    | 0.32 - 1.02   | 0.21 - 0.68      |
| IL (dB/ft at 2 GHz - at 18 GHz)   | 0.16 - 0.58    | 0.10 - 0.31   | 0.06 - 0.21      |
| Phase with flexure stability      | 2° at 18 GHz   | 7° at 18 GHz  | 7° at 18 GHz     |
| Amplitude stability (dB at 18GHz) | < 0,02         | < 0,05  | < 0,05           |
| Shielding Effectiveness (at 1GHz) | -110 dB min    | -110 dB min   | -110 dB min      |
| Crush resistance (N/100 mm)       | 2300           | 700   | 1000             |
| Minimum bend radius               | 25 mm (1 in.)  | 25 mm (1 in.)   | 40 mm (1.57 in.) |
| Temperature (°C)                  | -55 / + 105 °C | -70 / + 125 °C  | -70 / + 125 °C   |
| Phase matching                    | -              | By set, with master or per absolute phase, available with a typical phase matching of +/-0.4°/GHz |                  |
| Connectors                        | SMA, N, PC7    | SMA, N, TNC   | SMA, N, TNC      |
| Flexure life cycle                | 10,000         | 5,000   | 5,000            |
| Mating cycles durability          | 5,000          | 5,000   | 5,000            |
| Armor                             | Available      | Available   | Available        |

See details cable characteristics on page 6 to 8.

### Select armor option for reinforced cable assemblies.

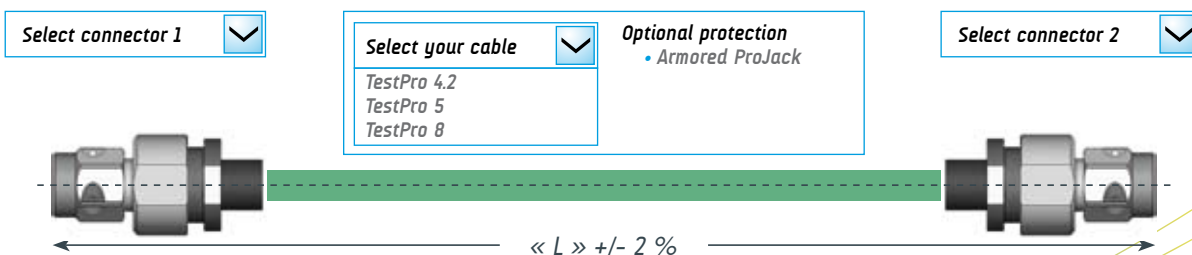
“ProJack” protect lab cable assemblies for greater life time. It is also dedicated for all defense systems tests running outdoors. See details protective jacket characteristics on page 12.

### Select connectors.

Select the right connectors compatible with your choice of TestPro cable on page 13 to 17.

Send quote requests to your Radiall sales contact.

You may also use our cable assembly builder at [www.radiall.com/cableassembly](http://www.radiall.com/cableassembly)





## PROJACK

### APPLICATION NOTE

**Main benefits:**

- high mechanical protection (resistance to crush, traction, abrasion, ...)
- high flexibility
- anti-torque
- strain relief
- anti-kinking action
- secured watertightness when used with compound chamber

Radiall P/N : G940RP10 - G941RP10

### CONSTRUCTION

|        | Material        |
|--------|-----------------|
| Spring | Stainless steel |
| Braid  | Stainless steel |
| Jacket | Black PU        |

### MECHANICAL CHARACTERISTICS

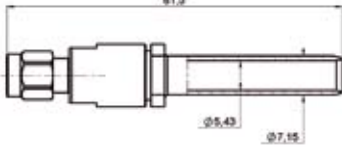
|                             | For TestPro 4.2 and TestPro 5 | For TestPro 8       |
|-----------------------------|-------------------------------|---------------------|
| Outer dia. (max)            | 11 mm (0.433 in.)             | 15 mm (0.590 in.)   |
| Maximum weight              | 340 g/m (103 g/ft)            | 190 g/m (57.6 g/ft) |
| Recommend. min. bend radius | 25 mm                         | 38 mm               |
| Crush resistance            | 2 500 N / 100 mm              |                     |
| Tensile strength            | 900 N                         |                     |

### ENVIRONMENTAL CHARACTERISTICS


|                             |                               |
|-----------------------------|-------------------------------|
| Operating temperature range | -55 / +100 °C (-67 / +212° F) |
| Fire resistance             | yes (FAR 25 853)              |
| Halogen free jacket         | no                            |

Connector part numbers are for reference only. Connectors and cables cannot be ordered separately.

## SMA SERIES

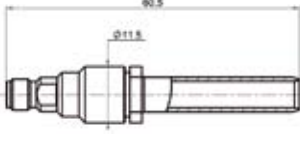


|                    |                      |
|--------------------|----------------------|
| <b>Designation</b> | <b>Straight Plug</b> |
| Item               | M125064C00           |
| Max. Freq          | 20 GHz               |
| VSWR ≤ 18 GHz      | 1.25                 |

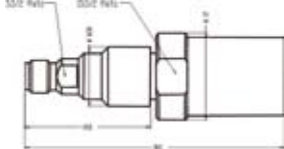


|                    |                                  |
|--------------------|----------------------------------|
| <b>Designation</b> | <b>Straight Plug For ProJack</b> |
| Item               | M125064C01                       |
| Max. Freq          | 20 GHz                           |
| VSWR ≤ 18 GHz      | 1.25                             |

**SMA Series characteristics.**  
 Voltage withstanding 750 Vrms  
 Connector material is stainless steel.  
 Finish is passivated  
 Temperature range with TestPro cables = -55 / +105 °C  
 Nominal coupling nut torque si 110 N (recommended torque wrench for plugs: R282320000 / 8 mm / 80-120 Ncm)

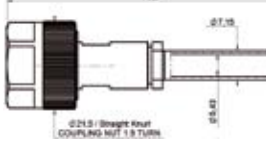


|                    |                      |
|--------------------|----------------------|
| <b>Designation</b> | <b>Straight Jack</b> |
| Item               | M125207C00           |
| Max. Freq          | 20 GHz               |
| VSWR ≤ 18 GHz      | 1.25                 |




|                    |                                  |
|--------------------|----------------------------------|
| <b>Designation</b> | <b>Straight Jack For ProJack</b> |
| Item               | M125207C01                       |
| Max. Freq          | 20 GHz                           |
| VSWR ≤ 18 GHz      | 1.25                             |

## N SERIES



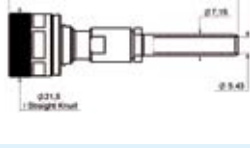
|                    |                      |
|--------------------|----------------------|
| <b>Designation</b> | <b>Straight Plug</b> |
| Item               | M163064C00           |
| Max. Freq          | 18 GHz               |
| VSWR ≤ 18 GHz      | 1.30                 |




|                    |                                  |
|--------------------|----------------------------------|
| <b>Designation</b> | <b>Straight Plug For ProJack</b> |
| Item               | M163064C01                       |
| Max. Freq          | 18 GHz                           |
| VSWR ≤ 18 GHz      | 1.30                             |

**N Series characteristics.**  
 Voltage withstanding 750 Vrms  
 Connector material is stainless steel.  
 Finish is passivated  
 Temperature range with TestPro cables = -55 / +105 °C  
 Nominal coupling nut torque si 400 N (recommended torque wrench for plugs: R282 303 000 / 19 mm / 160 Ncm)

## PC7 SERIES



|                    |                      |
|--------------------|----------------------|
| <b>Designation</b> | <b>Straight Plug</b> |
| Item               | M151064C00           |
| Max. Freq          | 18 GHz               |
| VSWR ≤ 18 GHz      | 1.30                 |



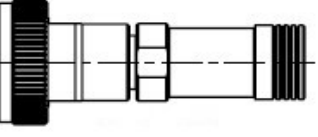


|                    |                                  |
|--------------------|----------------------------------|
| <b>Designation</b> | <b>Straight Plug For ProJack</b> |
| Item               | M151064C01                       |
| Max. Freq          | 18 GHz                           |
| VSWR ≤ 18 GHz      | 1.30                             |

**PC7 Series characteristics.**  
 Voltage withstanding 750 Vrms  
 Connector material is stainless steel.  
 Finish is passivated  
 Temperature range with TestPro cables = -55 / +105 °C

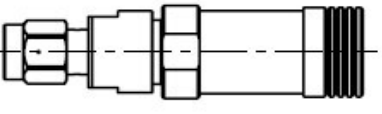
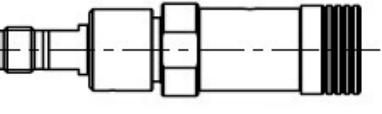
Connector part numbers are for indication only. Connectors and cables cannot be ordered separately.

### SMA 2.9 series

|   |                    |   |               |
|---|--------------------|---|---------------|
|  |                    |  |               |
| Designation   | Straight Plug      | Designation   | Straight Jack |
| Item  | R127801321         | Item  | R127822111    |
| Max. Freq   | 40 GHz             | Max. Freq   | 40 GHz        |
| VSWR ≤ 40 GHz   | 1.40               | VSWR ≤ 40 GHz   | 1.40          |
|  |                    |   |               |
| Designation   | NMD 2.9 port femal |   |               |
| Item  | R299776101         |   |               |
| Max. Freq   | 40 GHz             |   |               |
| VSWR ≤ 40 GHz   | 1.40               |   |               |

**SMA 2.9 Series characteristics.**  
 Voltage withstanding 750 Vrms  
 Connector material is stainless steel.  
 Finish is passivated  
 Temperature range = -55 / +105 °C  
 Nominal coupling nut torque si 110 N  
 Recommended torque wrench for plugs :  
 R282 320 000 / 8 mm / 80-120 Ncm

### SMA 2.9 series Vented connectors



|   |               |  |               |
|---|---------------|--|---------------|
|  |               |  |               |
| Designation   | Straight Plug | Designation  | Straight Jack |
| Item  | R127801311    | Item   | R127822101    |
| Max. Freq   | 40 GHz        | Max. Freq  | 40 GHz        |
| VSWR ≤ 40 GHz   | 1.40          | VSWR ≤ 40 GHz  | 1.40          |



CONNECTORS COMPATIBLE WITH

Connector part numbers are for indication only. Connectors and cables cannot be ordered separately.

SMA 2.9 series

|   |               |   |               |
|---|---------------|---|---------------|
|  |               |  |               |
| Designation   | Straight Plug | Designation   | Straight Jack |
| Item  | R127801311    | Item  | R127822121    |
| Max. Freq   | 40 GHz        | Max. Freq   | 40 GHz        |
| VSWR ≤ 40 GHz   | 1.40          | VSWR ≤ 40 GHz   | 1.40          |

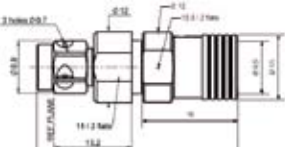
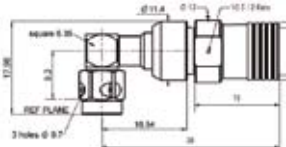
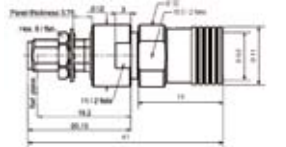
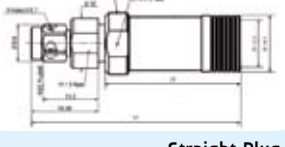
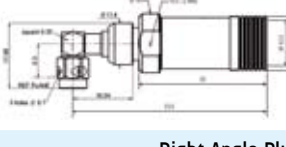
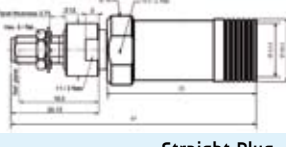
**SMA 2.9 Series characteristics.**  
 Voltage withstanding 750 Vrms  
 Connector material is stainless steel.  
 Finish is passivated  
 Temperature range = -55 / +105 °C  
 Nominal coupling nut torque si 110 N  
 Recommended torque wrench for plugs :  
 R282 320 000 / 8 mm / 80-120 Ncm

# CONNECTORS COMPATIBLE WITH



Connector part numbers are for reference only. Connectors and cables cannot be ordered separately.

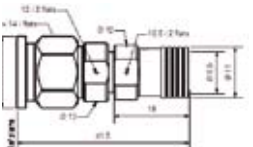
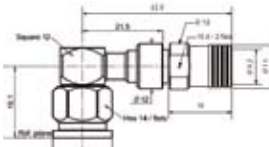
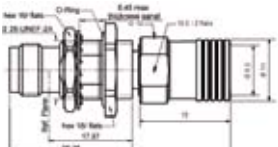
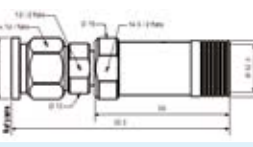
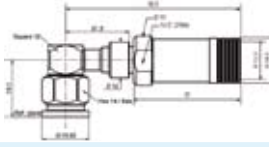
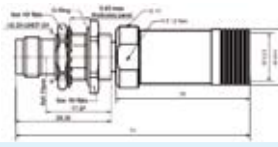
## SMA SERIES

|   |   |   |
|---|---|---|
|    |  |    |
| <b>Designation</b> Straight Plug  | <b>Designation</b> Right Angle Plug   | <b>Designation</b> Straight Jack  |
| Item M125065L02<br>Max. Freq 26.5 GHz<br>VSWR ≤ 18 GHz 1.25<br>≤ 26.5 GHz 1.30      | Item M125195L02<br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.30                         | Item M125330L02<br>Max. Freq 26.5 GHz 1.25<br>VSWR ≤ 18 GHz 1.30<br>≤ 26.5 GHz 1.30<br>Miscellaneous Panel sealed panel nut torque 200N |
|    |  |    |
| <b>Designation</b> Straight Plug For ProJack  | <b>Designation</b> Right Angle Plug For ProJack                                   | <b>Designation</b> Straight Plug For ProJack  |
| Item M125065L03<br>Max. Freq 26.5 GHz 1.25<br>VSWR ≤ 18 GHz 1.30<br>≤ 26.5 GHz 1.30 | Item M125195L03<br>Max. Freq 18 GHz 1.30<br>VSWR ≤ 18 GHz 1.30                    | Item M125330L03<br>Max. Freq 26.5 GHz 1.25<br>VSWR ≤ 18 GHz 1.30<br>≤ 26.5 GHz 1.30<br>Miscellaneous Panel sealed panel nut torque 200N |

### SMA Series characteristics.

Voltage withstanding 1000 Vrms. Connector material is stainless steel 316L. Finish is passivated. Temperature range with TestPro cables = -55 / +130 °C. Nominal coupling nut torque si 110 N (recommended torque wrench for plugs: R282320000 / 8 mm / 80-120 Ncm)

## TNC SERIES

|   |   |  |
|---|---|--|
|  |  |                               |
| <b>Designation</b> Straight Plug  | <b>Designation</b> Right Angle Plug   | <b>Designation</b> Straight Jack   |
| Item M143065L02<br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.30                           | Item M143195L02<br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.30                           | Item M143330L02<br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.30<br>Miscellaneous Panel sealed panel nut torque 200N      |
|  |  |                               |
| <b>Designation</b> Straight Plug For ProJack  | <b>Designation</b> Right Angle Plug For ProJack                                     | <b>Designation</b> Straight Plug For ProJack   |
| Item M143065L03<br>Max. Freq 26.5 GHz 1.25<br>VSWR ≤ 18 GHz 1.30<br>≤ 26.5 GHz 1.30 | Item M143195L03<br>Max. Freq 18 GHz 1.30<br>VSWR ≤ 18 GHz 1.30                      | Item M125330L03<br>Max. Freq 18 GHz 1.30<br>VSWR ≤ 18 GHz 1.30<br>Miscellaneous Panel sealed panel nut torque 370N |

### TNC Series characteristics.

Voltage withstanding 1500 Vrms. Connector material is stainless steel 316 L. Finish is passivated. Temperature range with TestPro cables = -55 / +130 °C. Nominal coupling nut torque si 330 N (recommended torque wrench for plugs: R282300000 / 14 mm / 265 Ncm)

Connector part numbers are for reference only. Connectors and cables cannot be ordered separately.

**N 18 SERIES**

|  |  |   |
|--|--|---|
|  |  |   |
| <b>Designation</b> <b>Straight Plug</b>  | <b>Designation</b> <b>Right Angle Plug</b>   | <b>Designation</b> <b>Straight Jack</b>   |
| Item <b>M163065L02</b><br>Max. Freq              18 GHz<br>VSWR ≤ 18 GHz      1.30   | Item <b>M163195L02</b><br>Max. Freq              18 GHz<br>VSWR ≤ 18 GHz      1.30 | Item <b>M163325L02</b><br>Max. Freq              18 GHz<br>VSWR ≤ 18 GHz      1.25<br>Miscellaneous      Panel sealed panel nut torque 500N |
|  |  |   |
| <b>Designation</b> <b>Straight Plug For ProJack</b>                                  | <b>Designation</b> <b>Right Angle Plug For ProJack</b>                             | <b>Designation</b> <b>Straight Plug For ProJack</b>   |
| Item <b>M163065L03</b><br>Max. Freq              26.5 GHz<br>VSWR ≤ 18 GHz      1.25 | Item <b>M163195L03</b><br>Max. Freq              18 GHz<br>VSWR ≤ 18 GHz      1.30 | Item <b>M163325L03</b><br>Max. Freq              18 GHz<br>VSWR ≤ 18 GHz      1.25<br>Miscellaneous      Panel sealed panel nut torque 500N |

**N 18 Series characteristics.**

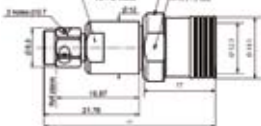
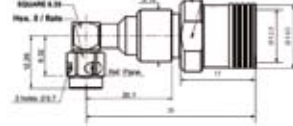


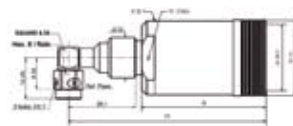
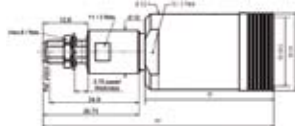
Voltage withstanding 1500 Vrms. Connector material is stainless steel 316L. Finish is passivated. Temperature range with TestPro cables = -55 / +130 °C. Nominal coupling nut torque si 400 N (recommended torque wrench for plugs: R282303000 / 19 mm / 160 Ncm)

# CONNECTORS COMPATIBLE WITH



Connector part numbers are for reference only. Connectors and cables cannot be ordered separately.

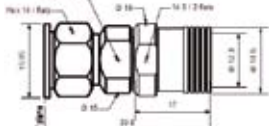
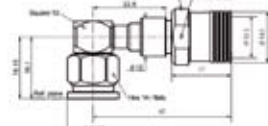
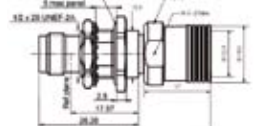
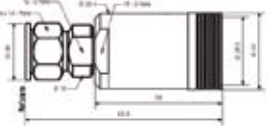
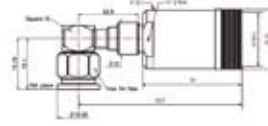
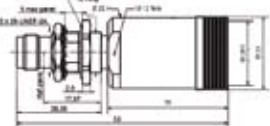
## SMA SERIES

|   |   |  |
|---|---|--|
|  |  |                                   |
| <b>Designation</b> Straight Plug  | <b>Designation</b> Right Angle Plug   | <b>Designation</b> Straight Jack   |
| Item <b>M125068L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                       | Item <b>M125199L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                       | Item <b>M125338L04</b><br>Max. Freq 26,5 GHz<br>VSWR ≤ 18 GHz<br>Miscellaneous<br>Panel sealed panel nut torque 250N |
|  |  |                                   |
| <b>Designation</b> Straight Plug For ProJack                                      | <b>Designation</b> Right Angle Plug For ProJack                                   | <b>Designation</b> Straight Plug For ProJack   |
| Item <b>M125068L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                       | Item <b>M125199L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                       | Item <b>M125338L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz<br>Miscellaneous<br>Panel sealed panel nut torque 250N   |

### SMA Series characteristics.

Voltage withstanding 1000 Vrms. Connector material is stainless steel 316L. Finish is passivated. Temperature range with TestPro cables = -55 / +130 °C. Nominal coupling nut torque si 110 N (recommended torque wrench for plugs: R28220000 / 8 mm / 80-120 Ncm)

## TNC SERIES

|   |   |  |
|---|---|--|
|  |  |                               |
| <b>Designation</b> Straight Plug  | <b>Designation</b> Right Angle Plug   | <b>Designation</b> Straight Jack   |
| Item <b>M143068L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                         | Item <b>M143198L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                         | Item <b>M143338L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz<br>Miscellaneous<br>Panel sealed panel nut torque 370N |
|  |  |                               |
| <b>Designation</b> Straight Plug For ProJack  | <b>Designation</b> Right Angle Plug For ProJack                                     | <b>Designation</b> Straight Plug For ProJack   |
| Item <b>M143068L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                         | Item <b>M143198L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz                         | Item <b>M143338L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz<br>Miscellaneous<br>Panel sealed panel nut torque 370N |

### TNC Series characteristics.

Voltage withstanding 1500 Vrms. Connector material is stainless steel 316 L. Finish is passivated. Temperature range with TestPro cables = -55 / +130 °C. Nominal coupling nut torque si 330 N (recommended torque wrench for plugs: R282300000 / 14 mm / 265 Ncm)

Connector part numbers are for reference only. Connectors and cables cannot be ordered separately.

**N 18 SERIES**

|  |   |  |
|--|---|--|
|  |   |  |
| <b>Designation</b> Straight Plug<br>Item <b>M163068L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.25             | <b>Designation</b> Right Angle Plug<br>Item <b>M163198L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.30             | <b>Designation</b> Straight Jack<br>Item <b>M163328L04</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.25<br>Miscellaneous Panel sealed panel nut torque 500N             |
|  |   |  |
| <b>Designation</b> Straight Plug For ProJack<br>Item <b>M163068L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.25 | <b>Designation</b> Right Angle Plug For ProJack<br>Item <b>M163198L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.30 | <b>Designation</b> Straight Plug For ProJack<br>Item <b>M163328L05</b><br>Max. Freq 18 GHz<br>VSWR ≤ 18 GHz 1.25<br>Miscellaneous Panel sealed panel nut torque 500N |

**N 18 Series characteristics.**

Voltage withstanding 1500 Vrms. Connector material is stainless steel 316L. Finish is passivated. Temperature range with TestPro cables = -55 / +130 °C. Nominal coupling nut torque si 400 N (recommended torque wrench for plugs: R282303000 / 19 mm / 160 Ncm)

## IN-SERIES ADAPTORS (DC-18 GHZ)



| Interface | Male - Male | Male - Female | Female - Female | Miscellaneous   |
|-----------|-------------|---------------|-----------------|---|
| SMA       | R125703000  | R125704000    | R125705000      | Gold plated stainless steel<br>Passivated stainless steel |
|           | R125703001  | R125704001    | R125705001      |   |
| TNC 18    | R143703700  | R143705700    | R143704700      | Square flange<br>Bulkhead                                 |
|           |             |               | R143710700      |   |
|           |             |               | R143730700      |   |
| N 18      | R163703701  | R163708701    | R163705701      | silicon gasket  |
|           | R163703001  | R163708001    | R163705001      |   |

## BETWEEN SERIES ADAPTORS (DC-18 GHZ)



| Interface |        | Part Number | N 18       |            |                              |
|-----------|--------|-------------|------------|------------|------------------------------|
|           |        |             | Male       | Female     | Female bulkhead panel sealed |
| SMA       | Male   | R191009000  |            |            |                              |
|           | Female | R191011000  |            |            |                              |
| PC 3,5    | Male   | R191010000  | R191324000 | R191326000 | R191333000                   |
|           | Female | R191012000  | R191328000 | R191330000 |                              |
| TNC       | Male   | R191017000  |            |            |                              |
|           | Female | R191019000  |            |            |                              |
| TNC 18    | Male   | R191017700  |            |            |                              |
|           | Female | R191019700  |            |            |                              |

## ATTENUATORS (DC-18GHZ)



| Interface | Part Number | Attenuation (dB) | Power (W) | Miscellaneous   |
|-----------|-------------|------------------|-----------|---|
| SMA       | R4118XX121  | 0 to 30          | 2         | Flat frequency response<br>Flat frequency response<br>Flat frequency response |
|           | R4138XX000  | 0 to 60          | 2         |   |
|           | R4161XX000  | 3 to 20          | 10 to 15  |   |
| TNC       | R4145XX161  | 0 to 20          | 2         |   |
|           | R4168XX000  | 3 to 20          | 10 to 15  |   |
| N         | R4147XX161  | 0 to 20          | 2         |   |
|           | R4160XX000  | 3 to 20          | 10 to 15  |   |

## LOADS (DC-18 GHZ)



| Interface  | Part Number | Gender     | Power (W) | Miscellaneous |
|------------|-------------|------------|-----------|---------------|
| SMA        | R404210000  | Male       | 2         | With cord     |
|            | R404210120  | Male       | 2         |               |
|            | R404215000  | Female     | 2         |               |
|            | R404523000  | Male       | 6         |               |
|            | R404523500  | Female     | 6         |               |
|            | R404573000  | Male       | 12        |               |
|            | R404573500  | Female     | 12        |               |
|            | R404589000  | Male       | 20        |               |
|            | R404589500  | Female     | 20        |               |
|            | TNC         | R404370000 | Male      |               |
| R404370120 |             | Male       | 2         |               |
| R404375000 |             | Female     | 2         |               |
| R404521000 |             | Male       | 6         |               |
| R404521500 |             | Female     | 6         |               |
| R404571000 |             | Male       | 12        |               |
| R404571500 |             | Female     | 12        |               |
| R404586000 |             | Male       | 20        |               |
| R404586500 |             | Female     | 20        |               |
| N          |             | R404340000 | Male      | 2             |
|            | R404340120  | Male       | 2         |               |
|            | R404355000  | Female     | 2         |               |
|            | R404522000  | Male       | 6         |               |
|            | R404522500  | Female     | 6         |               |
|            | R404572000  | Male       | 12        |               |
|            | R404572500  | Female     | 12        |               |
|            | R404588000  | Male       | 20        |               |
|            | R404588500  | Female     | 20        |               |

 Click on any line to go to the page.

| Part number | Page | Part number | Page | Part number | Page |
|-------------|------|-------------|------|-------------|------|
| F1703159GR  | 7    | ProJack     | 12   | R288940015  | 9    |
| F1703160GR  | 8    |             |      | R288940016  | 9    |
| F1100001    | 6    | R125703000  | 19   | R288940017  | 9    |
|             |      | R125703001  | 19   | R288940018  | 9    |
|             |      | R125704000  | 19   |             |      |
|             |      | R125704001  | 19   | R404210000  | 19   |
|             |      | R125705000  | 19   | R404210120  | 19   |
|             |      | R125705001  | 19   | R404215000  | 19   |
| G940RP10    | 12   | R143703700  | 19   | R404340000  | 19   |
| G941RP10    | 12   | R143704700  | 19   | R404340120  | 19   |
|             |      | R143705700  | 19   | R404355000  | 19   |
| M125064C00  | 13   | R143710700  | 19   | R404370000  | 19   |
| M125064C01  | 13   | R143730700  | 19   | R404370120  | 19   |
| M125065L02  | 14   | R163703001  | 19   | R404375000  | 19   |
| M125065L03  | 14   | R163703701  | 19   | R404521000  | 19   |
| M125068L04  | 16   | R163705001  | 19   | R404521500  | 19   |
| M125068L05  | 16   | R163705701  | 19   | R404522000  | 19   |
| M125195L02  | 14   | R163708001  | 19   | R404522500  | 19   |
| M125195L03  | 14   | R163708701  | 19   | R404523000  | 19   |
| M125199L04  | 16   | R191009000  | 19   | R404523500  | 19   |
| M125199L05  | 16   | R191010000  | 19   | R404571000  | 19   |
| M125330L02  | 14   | R191011000  | 19   | R404571500  | 19   |
| M125330L03  | 14   | R191012000  | 19   | R404572000  | 19   |
| M125338L04  | 16   | R191017000  | 19   | R404572500  | 19   |
| M125338L05  | 16   | R191017700  | 19   | R404573000  | 19   |
| M143065L02  | 14   | R191019000  | 19   | R404573500  | 19   |
| M143065L03  | 14   | R191019700  | 19   | R404586000  | 19   |
| M143068L04  | 16   | R191324000  | 19   | R404586500  | 19   |
| M143068L05  | 16   | R191326000  | 19   | R404588000  | 19   |
| M143195L02  | 14   | R191328000  | 19   | R404588500  | 19   |
| M143195L03  | 14   | R191330000  | 19   | R404589000  | 19   |
| M143198L04  | 16   | R191333000  | 19   | R404589500  | 19   |
| M143198L05  | 16   |             |      | R4118XX121  | 19   |
| M143330L02  | 14   | R288931001  | 10   | R4138XX000  | 19   |
| M143330L03  | 14   | R288931002  | 10   | R4145XX161  | 19   |
| M143338L04  | 16   | R288931003  | 10   | R4147XX161  | 19   |
| M143338L05  | 16   | R288931004  | 10   | R4160XX000  | 19   |
| M151064C00  | 13   | R288931005  | 10   | R4161XX000  | 19   |
| M151064C01  | 13   | R288931006  | 10   | R4168XX000  | 19   |
| M163064C00  | 13   | R288940001  | 9    |             |      |
| M163064C01  | 13   | R288940002  | 9    | TestPro 4.2 | 6    |
| M163065L02  | 15   | R288940003  | 9    | TestPro 5   | 7    |
| M163065L03  | 15   | R288940004  | 9    | TestPro 8   | 8    |
| M163068L04  | 17   | R288940005  | 9    |             |      |
| M163068L05  | 17   | R288940006  | 9    |             |      |
| M163195L02  | 15   | R288940007  | 9    |             |      |
| M163195L03  | 15   | R288940008  | 9    |             |      |
| M163198L04  | 17   | R288940009  | 9    |             |      |
| M163198L05  | 17   | R288940010  | 9    |             |      |
| M163325L02  | 15   | R288940011  | 9    |             |      |
| M163325L03  | 15   | R288940012  | 9    |             |      |
| M163328L04  | 17   | R288940013  | 9    |             |      |
| M163328L05  | 17   | R288940014  | 9    |             |      |



AEROSPACE



AUTOMOTIVE



DEFENSE



INDUSTRIAL



INSTRUMENTATION



MEDICAL



SPACE



TELECOM

## EUROPE

### France - RADIALL Headquarters

101, Rue Ph. Hoffmann  
93116 ROSNY sous BOIS (Paris)  
Tel.: +33 1 49 35 35 35 - Fax: +33 1 48 54 63 63  
E-Mail: info@radiall.com

### Finland - RADIALL SF

P.O. Box 202 - 90101 OULU  
Tel.: +358 407 522 412  
E-Mail: infofi@radiall.com

### Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143  
D63307 - RÖDERMARK (Frankfurt)  
Tel.: +49 60 74 91 07 0 - Fax: +49 60 74 91 07 70  
E-Mail: infode@radiall.com

### Italy - RADIALL Elettronica S.R.L.

Via Concordia, 5 - 20090 ASSAGO MILANO  
Tel.: +39 02 48 85 121 - Fax: +39 02 48 84 30 18  
E-Mail: infoit@radiall.com  
Regional office: Roma

### Netherlands - RADIALL B.V.

Hogebrinkerweg 15b - 3871 KM HOEVELAKEN  
Tel.: +31 33 253 40 09 - Fax: +31 33 253 45 12  
E-Mail: infofl@radiall.com

### Sweden - RADIALL A.B.

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)  
Tel.: +46 844 434 10 - Fax: +46 875 449 16  
E-Mail: infose@radiall.com

### U.K. - RADIALL Ltd

Ground Floor, 6 The Grand Union Office Park,  
Packet Boat Lane  
UXBRIDGE Middlesex UB8 2GH (London)  
Tel.: +44 1895 425 000 - Fax: +44 1895 425 010  
E-Mail: infouk@radiall.com

## NORTH AMERICA

### USA - RADIALL USA, Inc.

6825 West Galveston Street Suite 11  
CHANDLER, Arizona 85226  
Tel.: +1 480 682 9400 - Fax: +1 480 682 9403  
E-Mail: infousa@radiall.com

### USA - RADIALL AEP, Inc.

104 John W. Murphy Drive  
NEW HAVEN, Connecticut 06513  
Tel.: +1 203 776 2813 - Fax: +1 203 776 8294  
E-Mail: aepepsales@radiall.com

## ASIA

### China - SHANGHAI RADIALL Electronic Co., Ltd

N° 390 Yong He Road 200072 - SHANGHAI  
Tel.: +86 21 66 52 37 88 - Fax: +86 21 66 52 11 77  
E-Mail: infozh@radiall.com

### Japan - NIHON RADIALL

Shibuya-ku Ebisu 1-5-2, Kougetsu Bldg 405  
TOKYO 150-0013  
Tel.: +81 3 3440 6241 - Fax: +81 3 3440 6242  
E-Mail: infojp@radiall.com

### HongKong - RADIALL Electronics Ltd

Elite Industrial Centre, Room 212, 2/F  
N° 883 Cheung Sha Wan Road  
KOWLOON HONG KONG  
Tel.: +852 29 59 38 33 - Fax: +852 29 59 26 36  
E-Mail: infohk@radiall.com

### India - RADIALL PROTECTRON pvt Ltd

25 D, II Phase, Peenya Industrial Area  
BANGALORE 560058  
Tel.: +91 80 83 95 271 - Fax: +91 80 83 97 228  
E-Mail: infoin@radiall.com

## ALSO REPRESENTED IN

|                |             |              |
|----------------|-------------|--------------|
| Australia      | Hungary     | Poland       |
| Austria        | Indonesia   | Russia       |
| Belgium        | Israel      | Singapore    |
| Brazil         | Korea       | Spain        |
| Czech Republic | Latvia      | Switzerland  |
| Denmark        | Lithuania   | Taiwan       |
| Estonia        | Malaysia    | Thailand     |
| Greece         | Norway      | Vietnam      |
|                | Philippines | South Africa |

For the above countries, please contact the local agent or RADIALL at info@radiall.com