

Features

Unregulated Converters

- UL/CSA and EN Safety certified
- EN-61010 for Test, Measurement and Lab Use
- EN-60601 for Medical Applications
- Reinforced Isolation 6.4kVDC or 8kVDC
- Optional Continuous Short Circuit Protected
- Compact SIP7 Package
- Efficiency to 88%
- Very Low Isolation Capacitance
- /X2 Version with >9mm Input/Output Clearance

Selection Guide

Part Number SIP 7	Reinforced Isolation (kVDC)	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency Std (%)	Max Capacitive Load ⁽¹⁾
RxxP23.3S	/R6.4 & /R8	5, 12, 15, 24	3.3	600	72-78	3300µF
RxxP205S	/R6.4 & /R8	5, 12, 15, 24	5	400	79-84	1200µF
RxxP209S	/R6.4 & /R8	5, 12, 15, 24	9	222	80-87	1200µF
RxxP212S	/R6.4 & /R8	5, 12, 15, 24	12	167	80-87	680µF
RxxP215S	/R6.4 & /R8	5, 12, 15, 24	15	132	80-88	680µF
RxxP23.3D	/R6.4 & /R8	5, 12, 15, 24	±3.3	±300	73-80	±1500µF
RxxP205D	/R6.4 & /R8	5, 12, 15, 24	±5	±200	79-85	±470µF
RxxP209D	/R6.4 & /R8	5, 12, 15, 24	±9	±111	80-87	±470µF
RxxP212D	/R6.4 & /R8	5, 12, 15, 24	±12	±85	80-87	±330µF
RxxP215D	/R6.4 & /R8	5, 12, 15, 24	±15	±66	80-88	±330µF

xx = Input Voltage. Other input and output voltage combinations available on request.

No suffix is functional isolation e.g. R05P205S

* add Suffix "P" for Continuous Short Circuit Protection, e.g. R05P205S/P, R05P205D/P

* add Suffix "/X2" for single output with alternative pinout, e.g. R05P205S/X2, R05P205S/P/X2

* add Suffix "/R6.4" or "/R8" for Reinforced Isolation, e.g. R05P205D/R6.4, R05P205S/P/X2/R8

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Input Voltage Range	±10%
Output Voltage Accuracy	±5%
Line Voltage Regulation	1.2%/1% of V_{in} typ.
Load Voltage Regulation (10% to 100% full load)	3.3, 5V output types 15% max. other output types 10% max.
Output Ripple and Noise (20MHz BW)	200mVp-p max.
Operating Frequency	20kHz min. / 50kHz typ. / 85kHz max.
Efficiency at Full Load	65% min. / 80% max.
Minimum Load = 0%	Specifications valid for 10% minimum load only.
/R6.4	(tested for 1 second) 6400VDC (rated for 1 minute) 3200VAC / 60Hz
/R8	(tested for 1 second) 8000VDC (rated for 1 minute) 4000VAC / 60Hz
Isolation Capacitance	1.5pF min. / 10pF max.
Isolation Resistance	15 GΩ min.
Short Circuit Protection	1 Second
P-Suffix	Continuous
Operating Temperature Range (free air convection)	-40°C to +85°C (see Graph)
Storage Temperature Range	-55°C to +125°C
Relative Humidity	95% RH

cont.

ECONOLINE


DC/DC-Converter

with 3 year Warranty

RECOM

2 Watt

SIP 7 Single & Dual Output

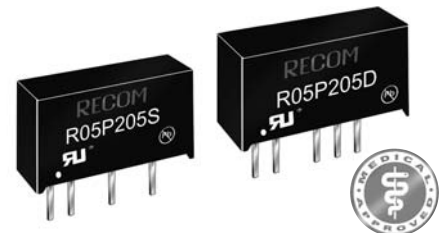

EN-60950-1 Certified

EN-60601-1 Certified

UL/CSA 60950-1 Certified

UL-60601 Certified

EN-61010-1 Certified


IEC-60601-1 CB Report

RxxP2xx/R

Description

The RxxP2xx_D Series of DC/DC Converters are certified to UL/CSA-60950 and UL/CSA 60601. This makes them ideal for medical and safety applications where approved or reinforced isolation is required. The reinforced versions are also EN61010-1 certified for Lab Equipment. The /X2 version has an input/output clearance of more than 9mm.

Derating-Graph (Ambient Temperature)

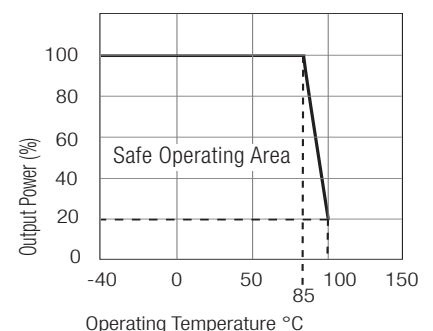

Refer to Application Notes

www.recom-electronic.com


RxxP2xxS_D

/Rx Series

ECONOLINE

DC/DC-Converter

Tolerance Envelope





Specifications (continued)

Package Weight		4.3g	
Packing Quantity		25 pcs per Tube	
MTBF (+25°C)		1154 x 10 ³ hours	
. (+85°C)		168 x 10 ³ hours	
Reinforced Isolation		Reinforced	
Transformer Creepage	/R6.4 Types	5.5 mm min.	
Transformer Clearance	/R6.4 Types	5.5 mm min.	
PCB Creepage & Clearance	/R6.4 Types	4.8 mm min.	
Certifications	CB Report: Medical Safety	Ref: CA/11158/CSA	IEC60601-1:1988 + A1: 1991 + A2:1995
Measurement, Control and Laboratory Use Safety	CSA General Safety	Report: IL091212010M1	EN 61010-1 : 2001
			UL 60950-1 1st Ed.
			C22.2 No. 60950-1-03
	UL/cUL Medical Safety	Report: E314885-A2-UL	UL60601-1 1st Edition
	CSA Medical Safety	Report: 2207629	CAN/CSA-22.2 No 601.1-M90
	EN General Safety	Report: PS-R7219C1	EN60950-1:2001 + A11: 2004
	EN Medical Safety	Report: PS090301601	EN60601-1:1990 + A13: 1996



Notes

Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

RxxP205S/R6.4 RxxP205S/R8

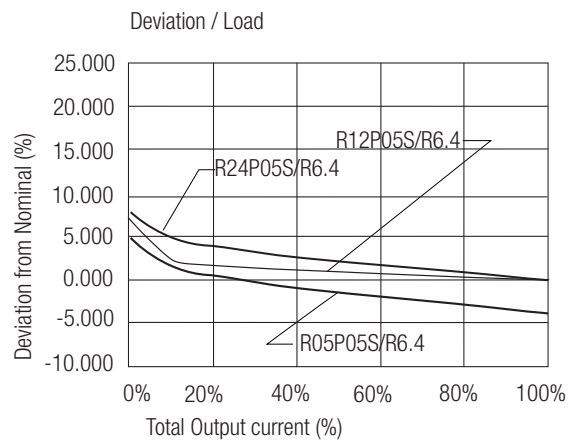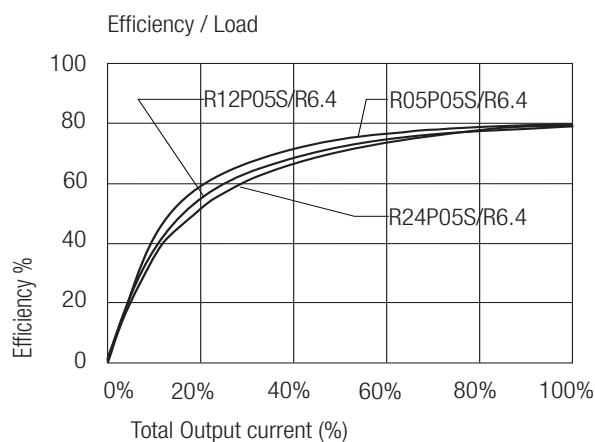




RxxP205D/R6.4 RxxP205D/R8

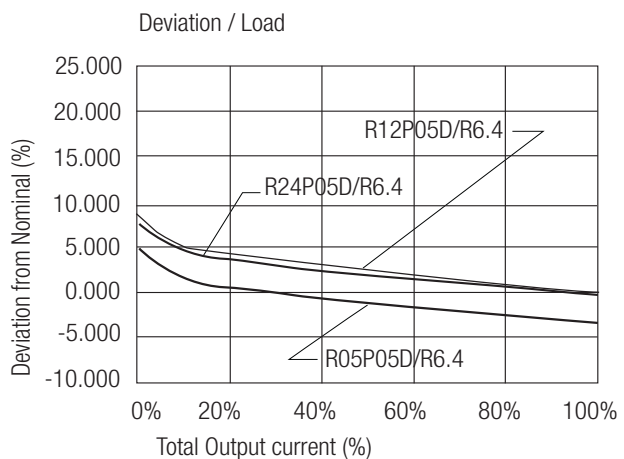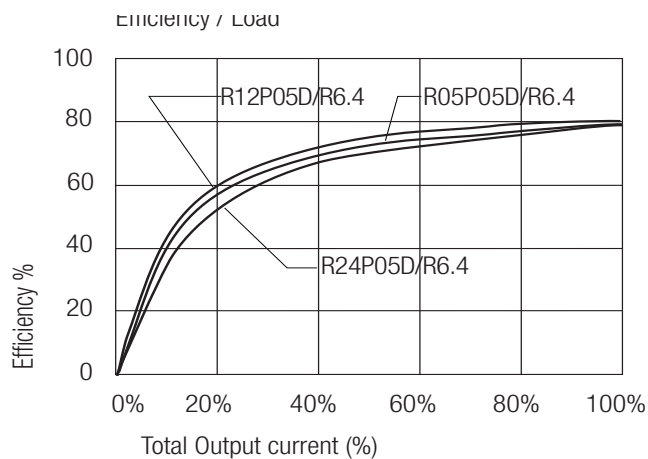



Package Style and Pinning (mm)

7 PIN SIP Package




3rd angle projection



Recommended Footprint Details

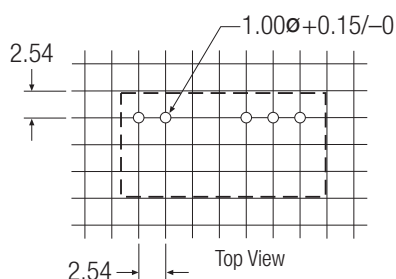

/X2 Single Output

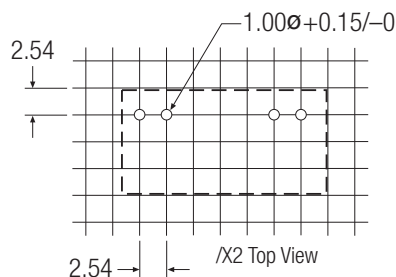

Pin Connections

Pin #	Single	Dual	/X2
1	+Vin	+Vin	+Vin
2	-Vin	-Vin	-Vin
5	-Vout	-Vout	No Pin
6	No Pin	Com	-Vout
7	+Vout	+Vout	+Vout

XX.X $\pm$ 0.5 mm
XX.XX $\pm$ 0.25 mm