

Features

LED DRIVER

- 70W Buck LED Driver
- Constant Current Output (350 to 1200mA)
- Digital PWM and Analogue Voltage Dimming
- High Efficiency to 96%
- EN and UL
- Metal or Plastic Case Version
- IP67 Rated for /W, Plastic Case Version
- 5 Year Warranty

Description

The RCD-48 series is a step-down constant current source designed for driving high power LED applications. Four output currents are available. The maximum output voltage is 60V. The buck drivers have digital PWM and/or analogue voltage dimming control and are special featured with very high efficiency. Typical applications are 48V bus lighting solutions or high voltage LED arrays (e.g. high bay lights).

Selection Guide

Part Number	Input Range (VDC)	Output Current (mA)	Output Voltage (VDC)	Dimming Control	Efficiency Typ. (%)
RCD-48-0.35*	9-60	0-350	2-56	Digital + Analogue	96
RCD-48-0.50*	9-60	0-500	2-56	Digital + Analogue	96
RCD-48-0.70*	9-60	0-700	2-56	Digital + Analogue	96
RCD-48-1.00*	9-60	0-1000	2-56	Digital + Analogue	96
RCD-48-1.20/M	9-60	0-1200	2-56	Digital + Analogue	96

*add suffix "/W" for wired version with Vref output and analogue + PWM dimming control (seven wires)

Note:

Add suffix "/M" for metal case (RCD-48-1.20/M only). No metal case with wires available.

Standard version (no suffix) and wired version (suffix /W) only in plastic case.

Specifications (typical at 25°C, nominal input voltage, rated output current unless otherwise specified)

Operating Input Voltage Range		9-60VDC
Absolute Maximum Input Voltage		65VDC max.
Output LED String Voltage Range		2V min. / 56V max.
(depend on the input voltage, defined by the output impedance, see Safe Operating Area)		
Input Filter		Capacitor
Output Current Accuracy		±3% typ. / ±5% max.
Internal Power Dissipation (Vin=60V, Vout=56V)	350mA	0.8W typ.
	500mA	1.0W typ.
	700mA	1.1W typ.
	1200mA	1.4W typ.
Output Current Stability	Vin=60V, Vout=2-56V, Iout=350-1200mA	±1% max.
Output Ripple and Noise (20MHz BW)	Vin=60V, Vout=2-56V, Iout=350-1200mA	300mVp-p max.
Maximum Capacitive Load		100µF max.
Switching Frequency		50kHz min. / 1000kHz max.
Efficiency at Full Load		96% typ.
PWM DIMMING CONTROL & REMOTE ON/OFF CONTROL		
Input Voltage Range		5V typ. / 10V max.
Threshold Voltage	Device ON	0.5V max.
	Device OFF	2.0V min.
Frequency		100Hz min. / 1000Hz max.
ANALOGUE DIMMING CONTROL (Leave open if not used - do not tie to +Vin)		
Input Voltage Range		0V min. / 10V max.
Control Voltage Range		0V min. / 5.1V max.
<i>Note: The analogue dimming range is from 0% to 100%, but the output can be unstable below 10%, when using the analogue dimming function.</i>		
Ambient Temperature (free air convection)	350mA	-40°C to +80°C
	500mA	-40°C to +80°C
	700mA	-40°C to +75°C
	1000mA	-40°C to +60°C
	1200mA	-40°C to +50°C

Analogue and PWM Dimming Control Note: Leave open if not used - do not tie to +Vin

LIGHTLINE
DC/DC-Converter
with 5 year Warranty

RECOM

Constant Current Buck LED Driver




E224736

EN-60950-1 Certified
UL-60950-1 Certified

RCD-48

Derating Graph

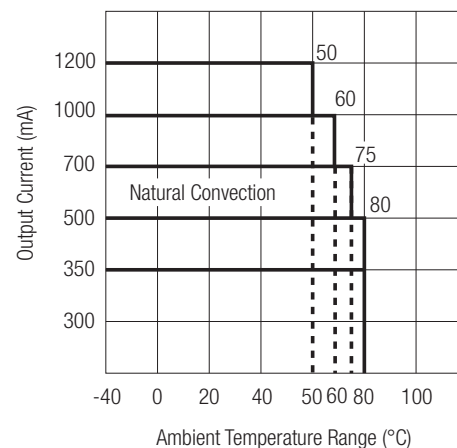


Please Read Application Notes

Specifications


Storage Temperature	-55°C to +125°C	
Case Thermal Impedance	10°C/W typ.	
Soldering Temperature	265°C / 10sec. max.	
Relative Humidity	95% RH	
Input Filter	Capacitor only	
Short Circuit Protection	Continuous, Auto Recovery	
Case Material	Non Conductive Black Plastic Metal Case	
Potting Material	Silicone Potting Material (UL94V-0)	
Case Dimensions	Plastic Case	32.6 x 16.65 x 11.10 mm
	Metal Case	32.6 x 16.0 x 11.2 mm
Package Weight	Pinned (Plastic Case)	13g
	Wired (Plastic Case)	16g
	Pinned (Metal Case)	16g
Packing Quantity	Pinned (Plastic/Metal Case)	29 pcs.
	Wired (Plastic Case)	3 pcs.
MTBF (using MIL-HDBK217F) (Nominal Vin at Full Load)	+25°C	1700 x 10 ³ hours
<i>Note: Detailed Information see Application Notes chapter "MTBF"</i>		

Safe Operating Area

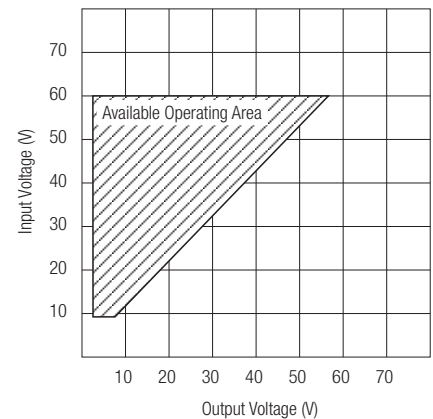


Package Style and Pinning

Through Hole Case (Plastic)

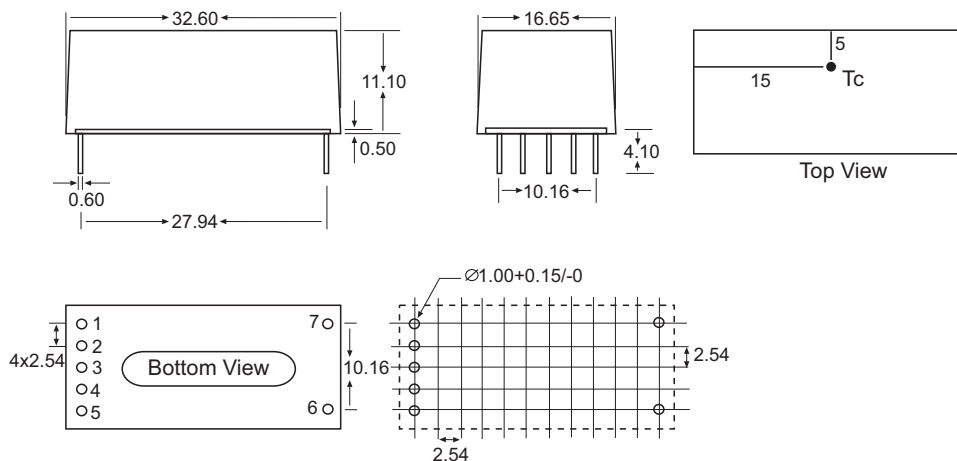

Through Hole Case (Metal)

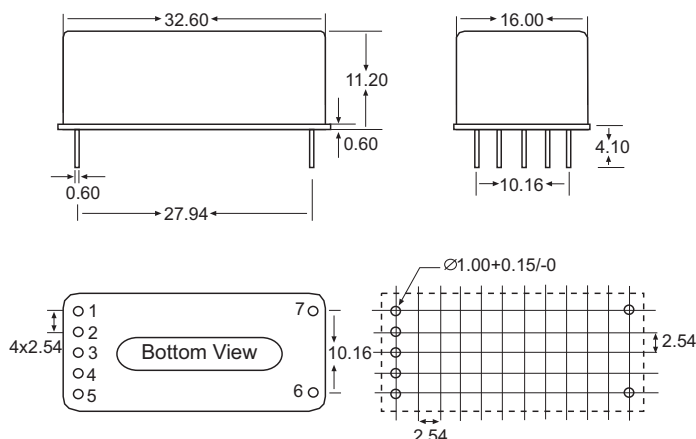


Pin Connections		RCD-48-x.xx
Pin#	Function	Comments
1	+Vin	DC Supply
2	GND	Do not connect to -Vout
3	Vref	Vref Voltage 5V typ.
4	PWM/ON/OFF	Leave open if not used
5	Analogue Dimming	Leave open if not used
6	-Vout	LED Cathode Connection
7	+Vout	LED Anode Connection

Unit: mm
Tolerance:
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

Package Style and Pinning

Wired Version (Plastic)

3rd angle projection

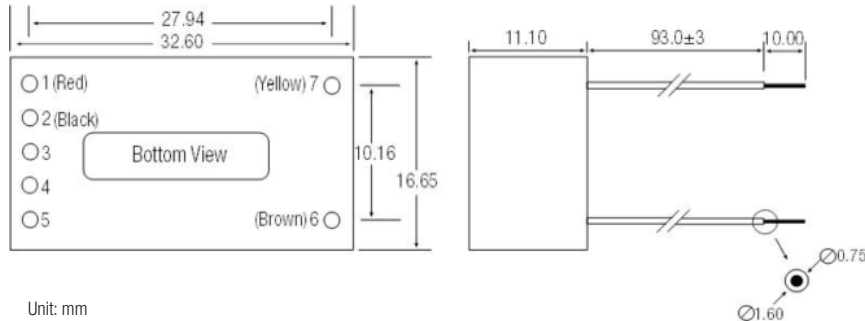


Unit: mm
Tolerance:
XX.X ± 1.0 mm
XX.XX ± 0.25 mm

Wire Connections Pin#	Function	RCD-48-x.xx/W Wire color
1	+Vin	Red
2	GND	Black
3	Vref	Yellow
4	PWM/ON/OFF	Blue
5	Analogue Dimming	Green
6	LED-	Brown
7	LED+	Yellow


Wires: UL/CSA approved (22AWG/300V)

Standard Application


Class B

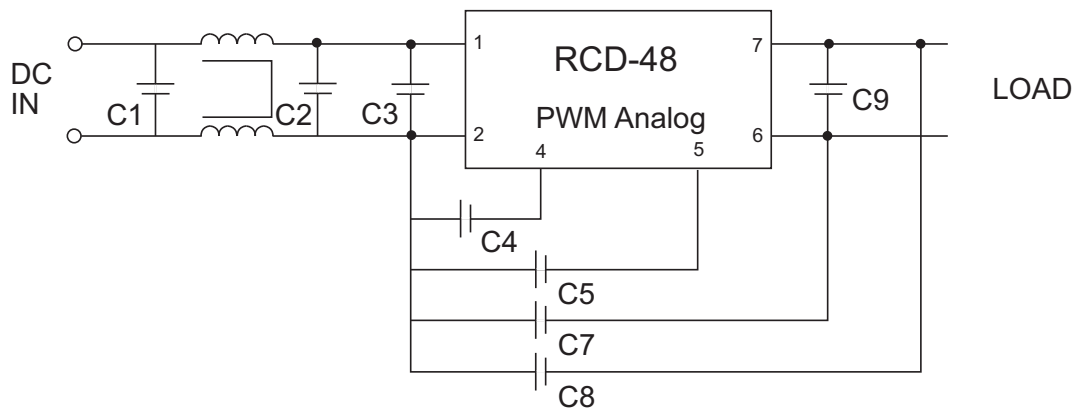


Filter Suggestion

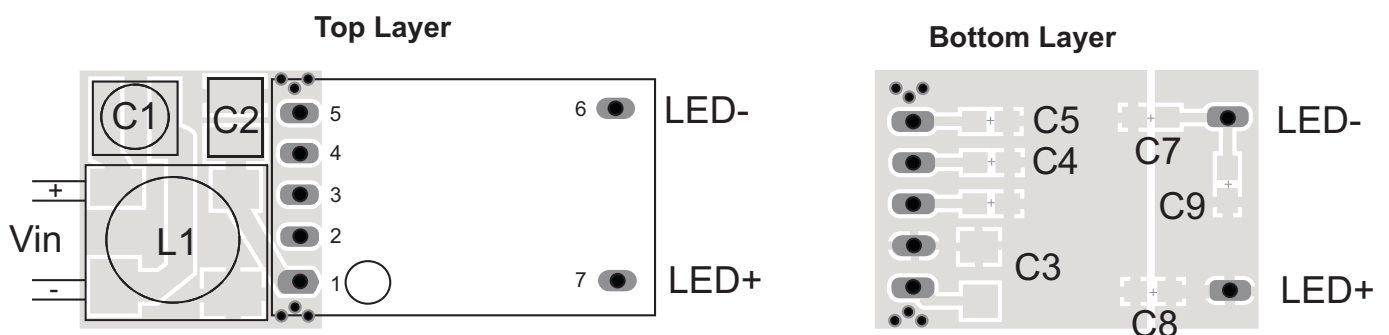


Single String Application

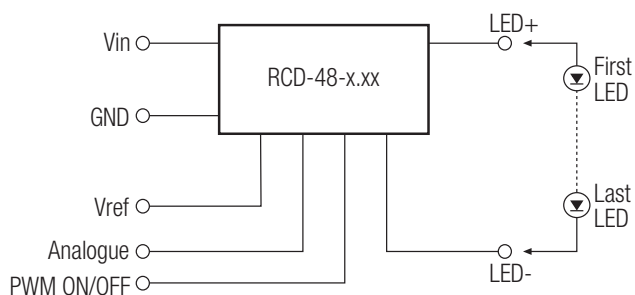


PWM Dimming Controlled

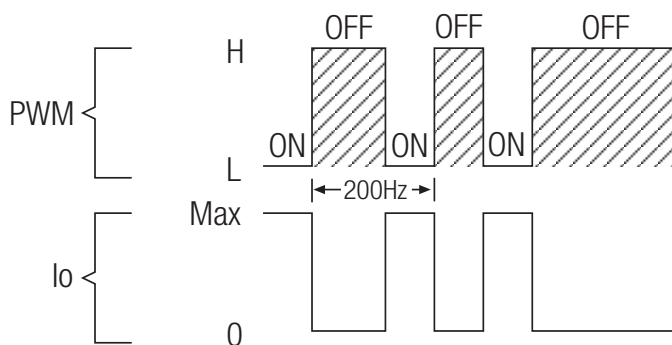

Dimming Controlled by Analog Voltage

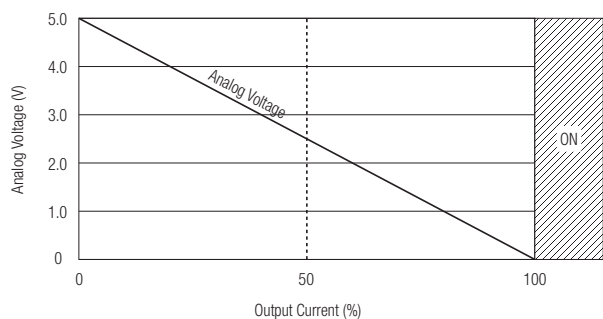

Lighting/Backlighting Wall Application

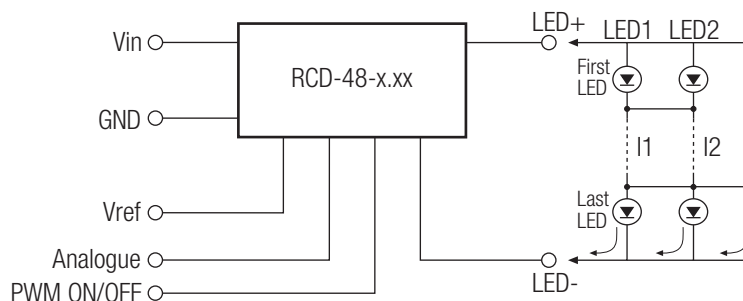

High Efficiency Lighting

