

**GLASS PASSIVATED SUPER FAST RECTIFIER**

**VOLTAGE RANGE 50 to 200 Volts CURRENT 2.0 Amperes**

**FEATURES**


- \* High reliability
- \* Low leakage
- \* Low forward voltage
- \* High current capability
- \* Super fast switching speed
- \* High surge capability
- \* Good for switching mode circuit

**MECHANICAL DATA**

- \* Case: Molded plastic
- \* Epoxy: Device has UL flammability classification 94V-0
- \* Lead: MIL-STD-202E method 208C guaranteed
- \* Mounting position: Any
- \* Weight: 0.38 gram

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

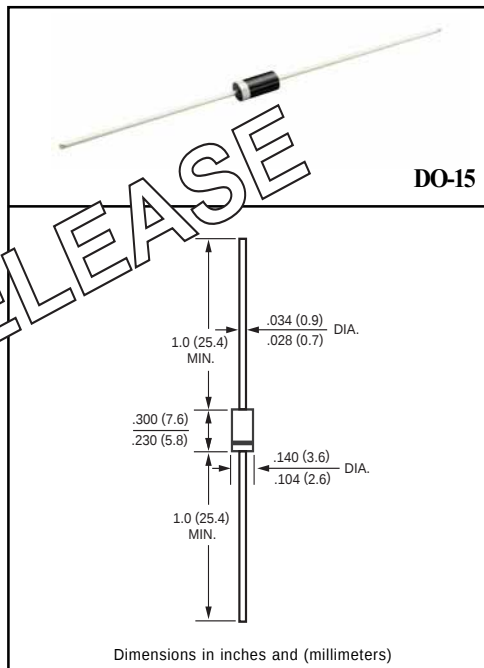

**MAXIMUM RATINGS** (At TA = 25°C unless otherwise noted)

| RATINGS                                                                                                        | SYMBOL   | SF21         | SF22 | SF23 | SF24 | UNITS |
|----------------------------------------------------------------------------------------------------------------|----------|--------------|------|------|------|-------|
| Maximum Recurrent Peak Reverse Voltage                                                                         | VRRM     | 50           | 100  | 150  | 200  | Volts |
| Maximum RMS Volts                                                                                              | VRMS     | 35           | 70   | 105  | 140  | Volts |
| Maximum DC Blocking Voltage                                                                                    | VDC      | 50           | 100  | 150  | 200  | Volts |
| Maximum Average Forward Current<br>TA = 55°C                                                                   | Io       | 2.0          |      |      |      | Amps  |
| Peak Forward Surge Current IFM (surge): 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | IFSM     | 75           |      |      |      | Amps  |
| Typical Junction Capacitance (Note 2)                                                                          | Cj       | 15           |      |      |      | pF    |
| Operating and Storage Temperature Range                                                                        | TJ, TSTG | -55 to + 150 |      |      |      | °C    |

**ELECTRICAL CHARACTERISTICS** (At TA = 25°C unless otherwise noted)

| CHARACTERISTICS                        |                        | SYMBOL          | SF21 | SF22 | SF23 | SF24 | UNITS |
|----------------------------------------|------------------------|-----------------|------|------|------|------|-------|
| Maximum Forward Voltage at 2.0A DC     |                        | V <sub>F</sub>  | 0.90 |      |      |      | Volts |
| Maximum DC Reverse Current             | @T <sub>A</sub> = 25°C | I <sub>R</sub>  | 10   |      |      |      | uAmps |
| at Rated DC Blocking Voltage           | @T <sub>A</sub> =100°C |                 | 350  |      |      |      |       |
| Maximum Reverse Recovery Time (Note 1) |                        | t <sub>rr</sub> | 20   |      |      |      | nSec  |

NOTES : 1. Test Conditions: IF=0.5A, IR=-1.0A, IRR=-0.25A.  
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

2002-4

## RATING AND CHARACTERISTIC CURVES ( USF21 THRU USF24 )

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

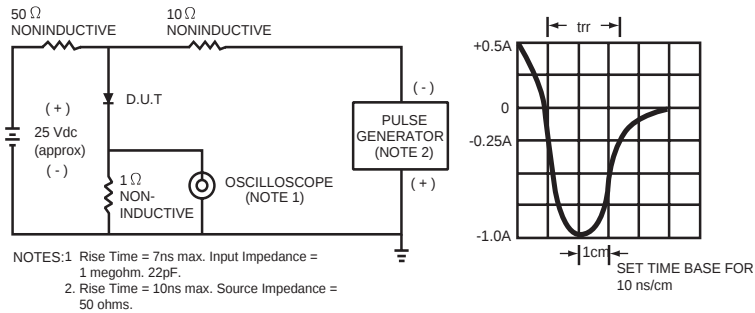


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

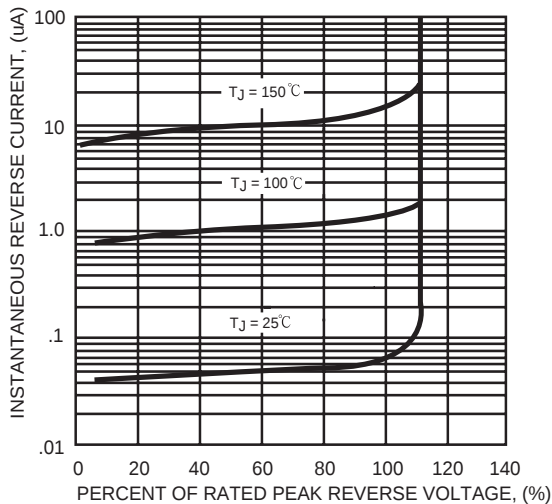


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

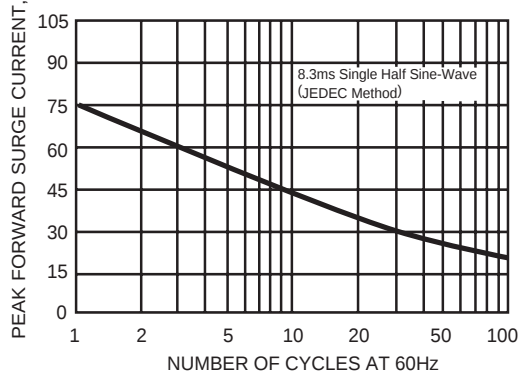


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

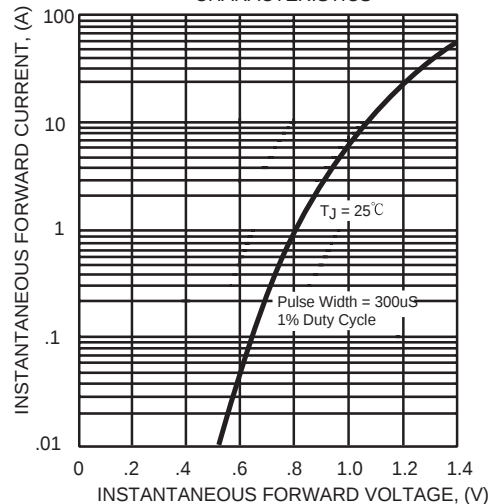


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

