

TXV SERIES

125°C Low ESR, Lead Free Reflow Soldering.

◆FEATURES

- Load Life : 125°C 1000~2000 hours Low ESR. •RoHS compliance.
- Lead free reflow soldering is available.
- Available for high density mounting.




◆SPECIFICATIONS


Items	Characteristics																
Category Temperature Range	-40~+125°C																
Rated Voltage Range	10~35V.DC																
Capacitance Tolerance	±20% (20°C, 120Hz)																
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater.(After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(V)																
(tanδ) Dissipation Factor(MAX)	<table border="1"> <tr> <th>Rated Voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> <tr> <td>(20°C, 120Hz)</td> <td>0.3</td> <td>0.2</td> <td>0.18</td> <td>0.16</td> </tr> </table>		Rated Voltage (V)	10	16	25	35	(20°C, 120Hz)	0.3	0.2	0.18	0.16					
Rated Voltage (V)	10	16	25	35													
(20°C, 120Hz)	0.3	0.2	0.18	0.16													
Endurance	<p>After applying rated voltage with rated ripple current at conditions stated in the table below at 125°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> <td>Case Size</td> <td>LifeTime (hrs)</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 300% of the specified value.</td> <td>φD=6.3</td> <td>1000</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> <td>φD≥8</td> <td>2000</td> </tr> </table>		Capacitance Change	Within ±30% of the initial value.	Case Size	LifeTime (hrs)	Dissipation Factor	Not more than 300% of the specified value.	φD=6.3	1000	Leakage Current	Not more than the specified value.	φD≥8	2000			
Capacitance Change	Within ±30% of the initial value.	Case Size	LifeTime (hrs)														
Dissipation Factor	Not more than 300% of the specified value.	φD=6.3	1000														
Leakage Current	Not more than the specified value.	φD≥8	2000														
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <th>Rated Voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> </tr> <tr> <td>(120Hz)</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		Rated Voltage (V)	10	16	25	35	(120Hz)	6	4	4	3	Z(-40°C)/Z(20°C)				
Rated Voltage (V)	10	16	25	35													
(120Hz)	6	4	4	3													
Z(-40°C)/Z(20°C)																	

◆DIMENSIONS

(mm)

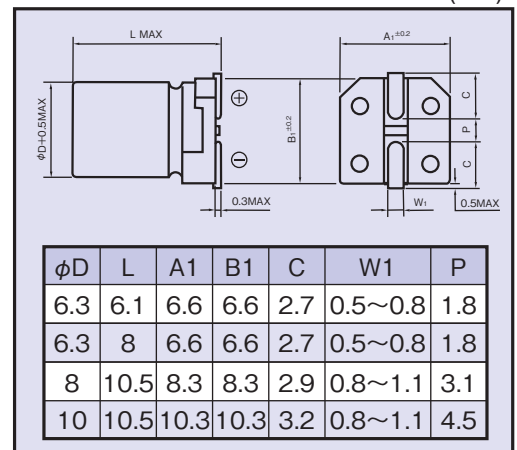

◆MARKING

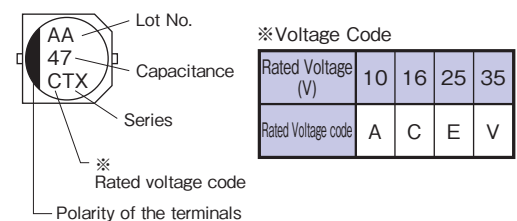

◆MULTIPLIER FOR RIPPLE CURRENT
Frequency Coefficient

Frequency (Hz)	120	1k	10k	100k≤
22~33μF	0.45	0.75	0.90	1.00
47~100μF	0.50	0.80	0.95	1.00
220~470μF	0.60	0.85	0.95	1.00

◆STANDARD SIZE Size φD×L(mm), Ripple Current (mA r.m.s./125°C, 100kHz), ESR(Ω MAX/100kHz)

WV (V.DC)	Cap (μF)	Size (φD×L)	Ripple	ESR	
				20°C	-40°C
10 (1A)	100	6.3×8	140	0.3	5
	220	6.3×8	110	0.7	11
	470	10×10.5	300	0.2	3
16 (1C)	47	6.3×6.1	70	1	15
		6.3×8	140	0.3	5

WV (V.DC)	Cap (μF)	Size (φD×L)	Ripple	ESR	
				20°C	-40°C
25 (1E)	33	6.3×6.1	70	1	15
	47	6.3×8	140	0.3	5
	100	6.3×8	110	0.7	11
		8×10.5	300	0.16	2.5
	220	8×10.5	220	0.3	4.5
		10×10.5	420	0.1	1.5
330	10×10.5	300	0.2	3	

WV (V.DC)	Cap (μF)	Size (φD×L)	Ripple	ESR	
				20°C	-40°C
35 (1V)	22	6.3×6.1	70	1	15
	33	6.3×8	140	0.3	5
	47	6.3×8	110	0.7	11
		8×10.5	300	0.16	2.5
	100	8×10.5	220	0.3	4.5
		10×10.5	420	0.1	1.5
220	10×10.5	300	0.2	3	

◆PART NUMBER

