

Screw, Screw or Rivet, 5 x 20 mm, IP 00

**250 VAC · 3.2 W / 10 A · 10 A (UL/CSA)****Description**

- Optional covers, see accessories

Standards

- IEC 60127-6
- UL 512
- CSA C22.2 no. 39

Approvals

- UL File Number: E39328

References

General Product Information

Accessories


WeblinksApprovals: <http://www.schurter.com/approvals>RoHS: <http://www.schurter.com/rohs>**Technical Data**

Fuse-Link	5 x 20 mm
Mounting	Screw
Fastening	Screw or Rivet
Terminal	Solder
Rated Voltage	250 VAC
Rated Current	10 A (UL/CSA)
Rated Power Acceptance IEC	3.2 W / 10 A @ Ta 23 °C 2.5 W / 10 A with cover, see derating curves
Degree of Protection	IP 00
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, black, UL 94V-0
Material: Terminals	Nickel-Silver
Unit Weight (Socket/Cap)	3.62 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Voltage Rating, Current Rating, Approvals


Soldering Methods	Wave
Solderability	350 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 2
Resistance to Soldering Heat	350 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 2
Contact Resistance	< 5 mΩ at 20 mV
Dielectric Strength	> 3 kV between L-N (50 Hz; 1 min)
Impulse Withstand Voltage	> 4 kV between L-N
Insulation Resistance	> 10 MΩ between L-N (500 VDC; 1 min)
Overvoltage Category	I - III acc. to IEC 60664-1
Pollution Degree	1 - 3 acc. to IEC 60664-1

Dimensions

Length |-----| 47 mm

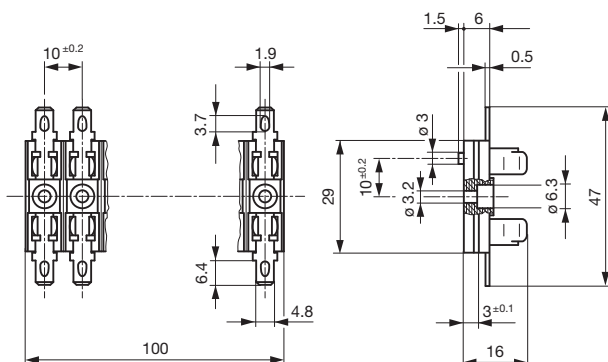


Variant 0031.5001

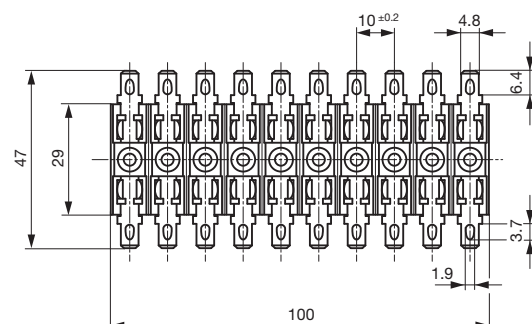

Variant 0031.5010

Derating Curves

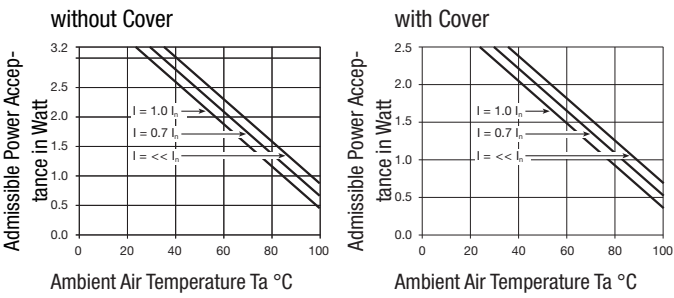

Variants

Order Number	Holder	Strip	Accessories
0031.5001	●		
0031.5010		●	
0853.9561			Transparent Cover 1.6 W
0853.9562			Transparent Cover 2.5 W

Packaging Unit Bulk (100 pcs.)