

IEC cord connector C15, rewireable, straight



4781

**Description**

- Rewireable plug:
Screw-on
- Outlet, Pin temperature 120 °C, Protection class I
- Cable
- Substitute for type [8943.W](#)

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

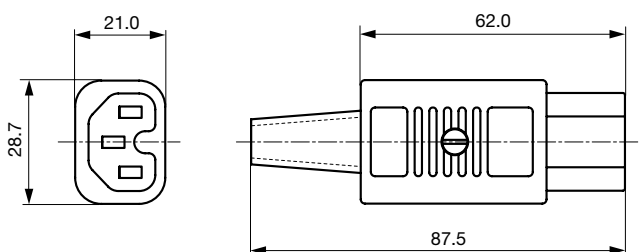
Ratings IEC	10 A / 250 VAC; Hz 50
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 120 °C
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Cable
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet /-Outlet	C15 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for warm condition) pin-temperature 120 °C, 10 A, Protection class I
--------------------------	-------------------------------------------------------------------------------------------------------------------------------

Dimensions

4781

Length |-----| 28.7 mm

**Variants**
[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Color	Max. cable diameter	Max. wire size	Order Number
black	8.5 mm	3 x 1 mm ² / 3 x 18 AWG	4781.0000
black	10.0 mm	3 x 2 mm ² / 3 x 14 AWG	4781.0100

Max. torque for screws: Terminal: 0.5 Nm, Cable clamp: 0.3 Nm, Cover: 0.3 Nm

Cord retaining clamp see accessories

Packaging unit

100 Pcs

Accessory**Description**

[Cord retaining kits](#)
Cord retaining strain relieve
