

Shock-Safe Fuseholder, 6.3 x 32 mm, Fingerrip, Rear-Side, NF



250 VAC · 2.5W/10A (NF) · 10A (UL/CSA)

**Description**

- Screw type fuse carrier

Standards

- UL 512
 - CSA C22.2 no. 39
 - NF C 93-436 - Modell HB02
 - Contrôle de Conformité de Qualité (CCQ)

Approvals

- UL File Number: E41738

References[General Product Information](#)**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#),
[Distributor-Stock-Check](#)



Technical Data

Fuse-Link	6.3 x 32mm
Mounting	Panel Mount, Rear-Side
Fastening	Fixing Nut
Terminal	Solder
Rated Voltage	250VAC
Rated Current	10A (NF), 10A (UL/CSA)
Rated Power Acceptance IEC	2.5W / 10A @ Ta 23°C
	Admissible power acceptance at higher ambient temperature see derating curves
Degree of Protection	IP 40 / IP 67
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140
Admissible Ambient Air Temp.	-40°C to 85°C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight (Socket/Cap)	19 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	Type, Voltage Rating, Current Rating, Approvals, HB2

Soldering Methods	Iron
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phases D and F
Admissible Torque on Fixing Nut	max 1.2Nm
Panel Thickness s	max 5mm

Dimensions

Length |-----| 54 mm

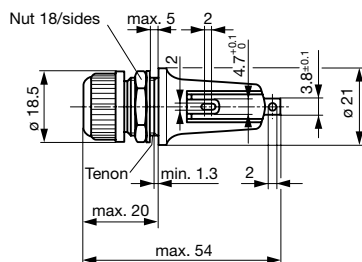




Mounting holes

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Holder	Cap	Fuse-Link	Degree of Protection	   GAM T1	NNO	Reference	Order Number		
•	Fingergrip	6.3 x 32mm	IP 40	•	•	•	•	23312P	7092.2520
•	Fingergrip	6.3 x 32mm	IP 67					23312EJJP	7092.2550
•	Fingergrip	6.3 x 32mm	IP 67					23312ERJJP	7092.2630

Packaging Unit Bulk (100 pcs.)