

3M™ Heel Grounder

Red Standard Style Heel Grounder with D-Ring

3M improved the standard heel grounder by adding UL listing for safety, lot coding for traceability, and our tough, conductive rubber sole that includes a nylon layer for durability. This grounder also features a D-Ring and elastic hook and loop for full adjustability. Compliance verification is simplified by the bright red elastic strap. 3M foot grounders are designed and manufactured for comfort, durability, and cost effectiveness. Our grounders are UL listed for safety and tested for electrical performance. 3M uses time-tested construction techniques including computer controlled stitching, riveting, die cutting, and heat cutting to ensure consistent performance.

Standards

Meets the requirements of ANSI/ESD S-20.20, EIA 625, MIL-STD-1686, and MIL-HDBK-263.

Specifications

Resistor:	1 megohm
Color:	Black
Ribbon:	Multi-strand, carbon suffused nylon on polyester, sewn in sinusoidal pattern to provide side to side conductivity.
Hook and Loop:	3/4"
Elastic Strap:	Red
Sole Interior:	Non-marking
Sole Exterior:	<10 ⁵ ohms


Part Numbers

HGS1MD-RED Red Standard Heel Grounder, 1 meg resistor

See 3M Data Sheets for these related items:

3M™ Foot Grounder Tester

3M™ Floor Mats

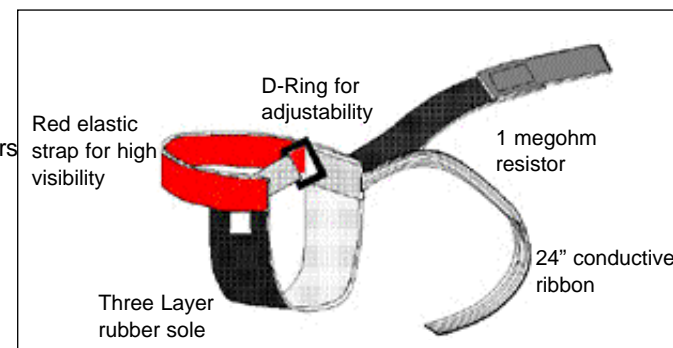

How Foot Grounders Work

Foot grounders discharge static from a person to ground by connecting the person to a grounded walking surface. A conductive ribbon placed inside the wearer's shoe or sock makes electrical contact with the skin through perspiration. The ribbon is joined to a resistor which limits current should accidental exposure to electricity occur. The other end of the resistor is joined to a conductive sole. This sole contacts a grounded ESD floor mat or ESD flooring system. Foot grounders must be worn on both feet to maintain ground contact while walking.

PRODUCT DATA SHEET

Foot Grounder - Standard Style - High Visibility

PRODUCT

RED STANDARD HEEL GROUNDER

ITEM NUMBER

SEE ABOVE

DATASHEET

1125-B

3M Electronic Solutions Division
6801 River Place Blvd.
Austin, TX 787260-9000
US and Canada: **866-722-3736**

Fax: 866-722-3735

Intl: 919-718-0000; Fax: 919-774-8174

email: 3Mstaticinfo@mmm.com; www.3M.com/static

3M is a trademark of 3M Company.

All other trademarks herein are the property of their respective owners.

© 2008

3M