

SEMiX252GB126HDs



SEMiX® 2s

Trench IGBT Modules

SEMiX252GB126HDs

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Not for new design

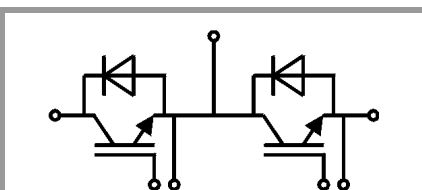

GB

Absolute Maximum Ratings

Symbol	Conditions		Values	Unit
IGBT				
V _{CES}	T _j = 25 °C		1200	V
I _C	T _j = 150 °C	T _c = 25 °C	242	A
		T _c = 80 °C	170	A
I _{Cnom}			150	A
I _{CRM}	I _{CRM} = 2xI _{Cnom}		300	A
V _{GES}			-20 ... 20	V
t _{psc}	V _{CC} = 600 V V _{GE} ≤ 20 V V _{CES} ≤ 1200 V	T _j = 125 °C	10	μs
T _j			-40 ... 150	°C
Inverse diode				
I _F	T _j = 150 °C	T _c = 25 °C	228	A
		T _c = 80 °C	158	A
I _{Fnom}			150	A
I _{FRM}	I _{FRM} = 2xI _{Fnom}		300	A
I _{FSM}	t _p = 10 ms, sin 180°, T _j = 25 °C		1000	A
T _j			-40 ... 150	°C
Module				
I _{t(RMS)}	T _{terminal} = 80 °C		600	A
T _{stg}			-40 ... 125	°C
V _{isol}	AC sinus 50Hz, t = 1 min		4000	V

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
IGBT					
$V_{CE(sat)}$	$I_C = 150\text{ A}$ $V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25^\circ\text{C}$	1.7	2.10	V
		$T_j = 125^\circ\text{C}$	2.0	2.45	V
V_{CE0}	chipelevel	$T_j = 25^\circ\text{C}$	1	1.2	V
		$T_j = 125^\circ\text{C}$	0.9	1.1	V
r_{CE}	$V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25^\circ\text{C}$	4.7	6.0	$\text{m}\Omega$
		$T_j = 125^\circ\text{C}$	7.3	9.0	$\text{m}\Omega$
$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C = 6\text{ mA}$	5	5.8	6.5	V
I_{CES}	$V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$	$T_j = 25^\circ\text{C}$		2.0	mA
		$T_j = 125^\circ\text{C}$			mA
C_{ies}	$V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	10.7		nF
C_{oes}		$f = 1\text{ MHz}$	0.56		nF
C_{res}		$f = 1\text{ MHz}$	0.48		nF
Q_G	$V_{GE} = -8\text{ V...} + 15\text{ V}$		1200		nC
R_{Gint}	$T_j = 25^\circ\text{C}$		5.00		Ω
$t_{d(on)}$	$V_{CC} = 600\text{ V}$	$T_j = 125^\circ\text{C}$	300		ns
t_r	$I_C = 150\text{ A}$	$T_j = 125^\circ\text{C}$	45		ns
E_{on}	$V_{GE} = \pm 15\text{ V}$	$T_j = 125^\circ\text{C}$	20		mJ
$t_{d(off)}$	$R_{Gon} = 3\ \Omega$	$T_j = 125^\circ\text{C}$	570		ns
t_f	$R_{Goff} = 3\ \Omega$	$T_j = 125^\circ\text{C}$	110		ns
E_{off}		$T_j = 125^\circ\text{C}$	21		mJ
$R_{th(j-c)}$	per IGBT			0.15	K/W

SEMiX252GB126HDs



SEMiX® 2s

Trench IGBT Modules

SEMiX252GB126HDs

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperatur limited to $T_C=125^\circ\text{C}$ max.
- Not for new design

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Inverse diode						
V _F = V _{EC}	I _F = 150 A	T _j = 25 °C		1.6	1.80	V
	V _{GE} = 0 V chiplevel	T _j = 125 °C		1.6	1.8	V
V _{F0}	chiplevel	T _j = 25 °C	0.9	1	1.1	V
		T _j = 125 °C	0.7	0.8	0.9	V
r _F	chiplevel	T _j = 25 °C	3.3	4.0	4.7	mΩ
		T _j = 125 °C	4.7	5.3	6.0	mΩ
I _{RRM}	I _F = 150 A	T _j = 125 °C	260			A
Q _{rr}	di/dt _{off} = 4600 A/μs	T _j = 125 °C	43			μC
E _{rr}	V _{GE} = -15 V V _{CC} = 600 V	T _j = 125 °C	18			mJ
R _{th(j-c)}	per diode				0.24	K/W
Module						
L _{CE}			18			nH
R _{CC'+EE'}	res., terminal-chip	T _C = 25 °C	0.7			mΩ
		T _C = 125 °C	1			mΩ
R _{th(c-s)}	per module		0.045			K/W
M _s	to heat sink (M5)		3	5		Nm
M _t		to terminals (M6)	2.5	5		Nm
					Nm	
w			250			g
Temperature Sensor						
R ₁₀₀	T _C =100°C (R ₂₅ =5 kΩ)		493 ± 5%			Ω
B _{100/125}	R _(T) =R ₁₀₀ exp[B _{100/125} (1/T-1/T ₁₀₀)]; T[K];		3550 ±2%			K



GB

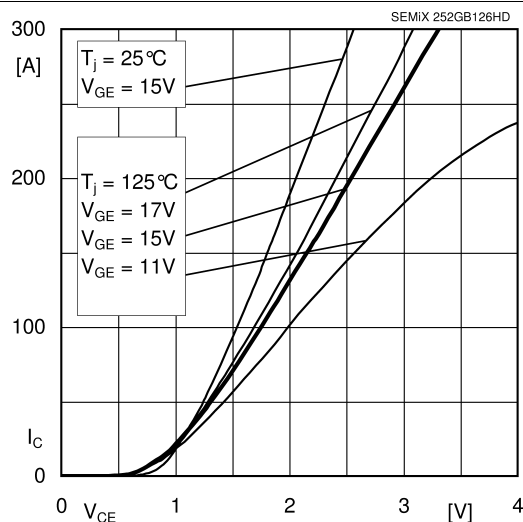


Fig. 1: Typ. output characteristic, inclusive $R_{CC} + E_E$

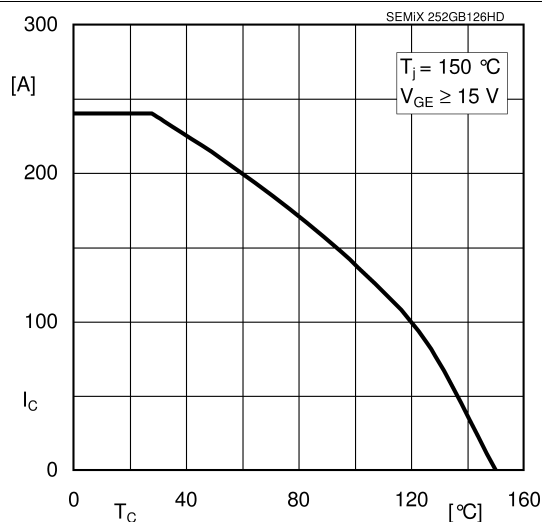


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

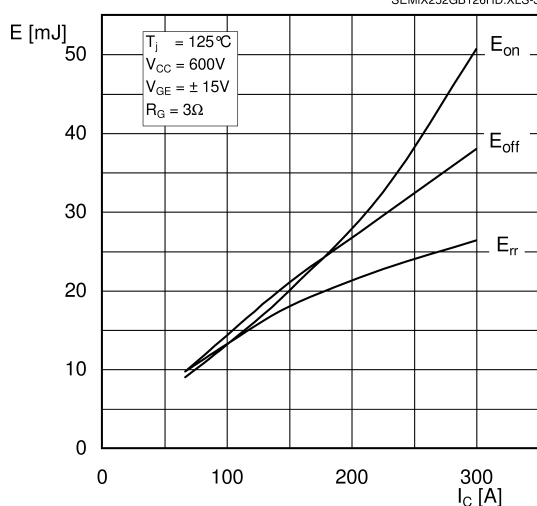


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

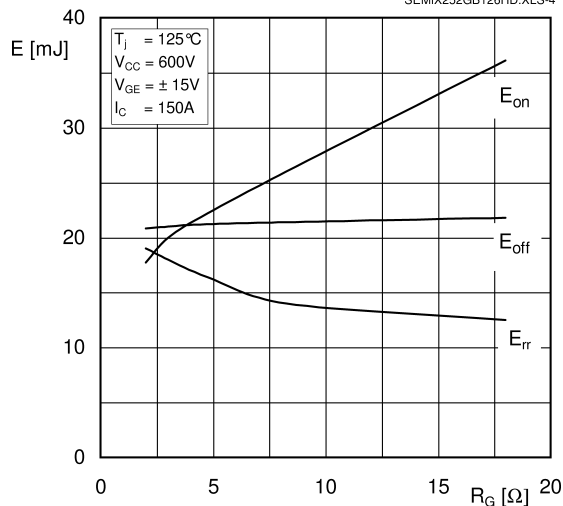


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

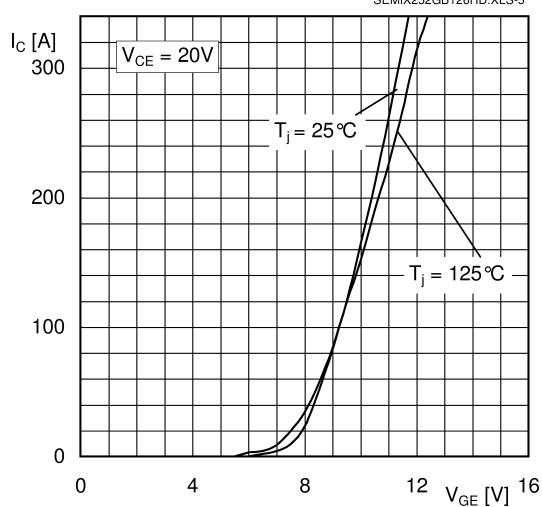


Fig. 5: Typ. transfer characteristic








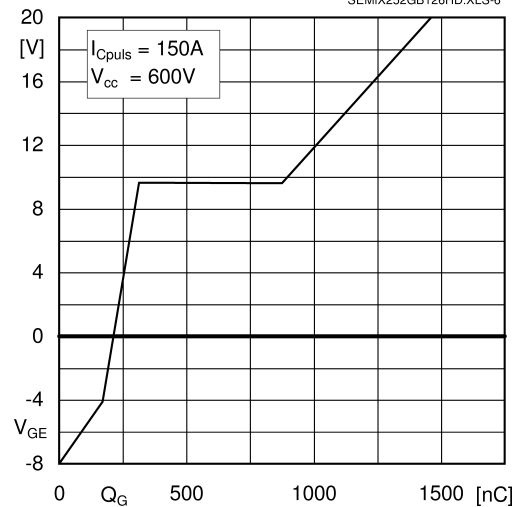



Fig. 6: Typ. gate charge characteristic

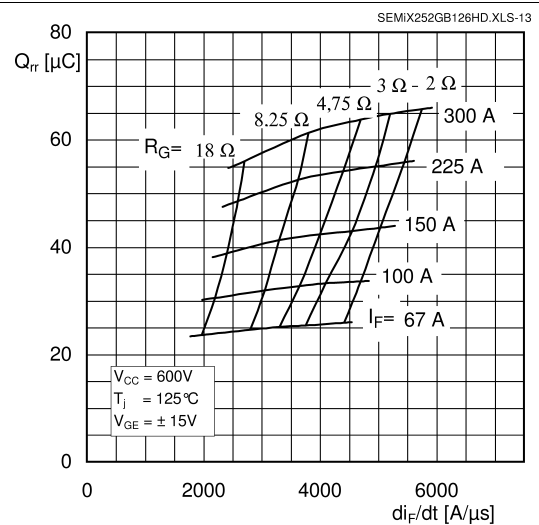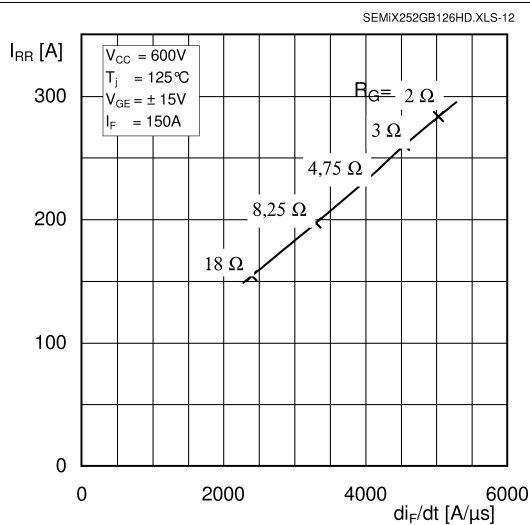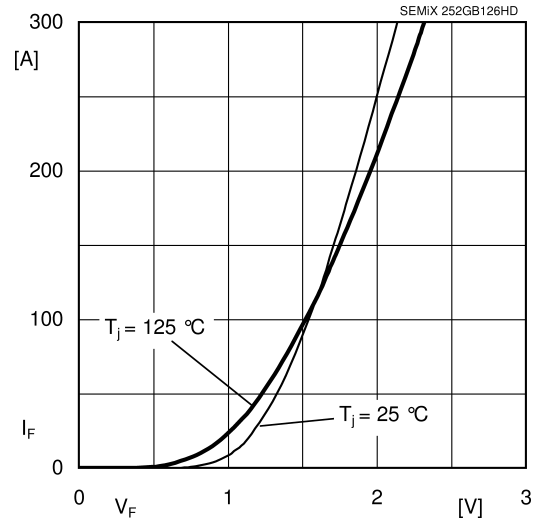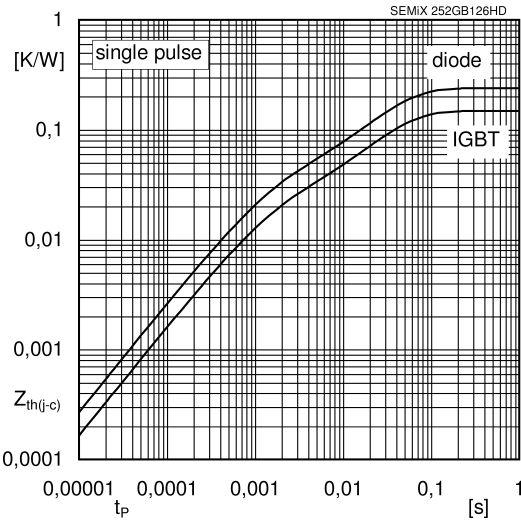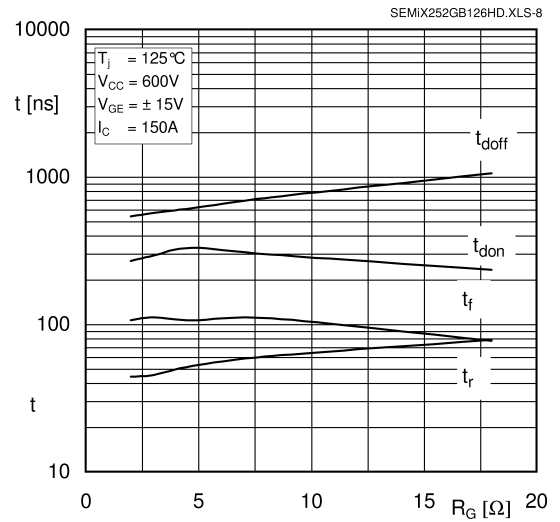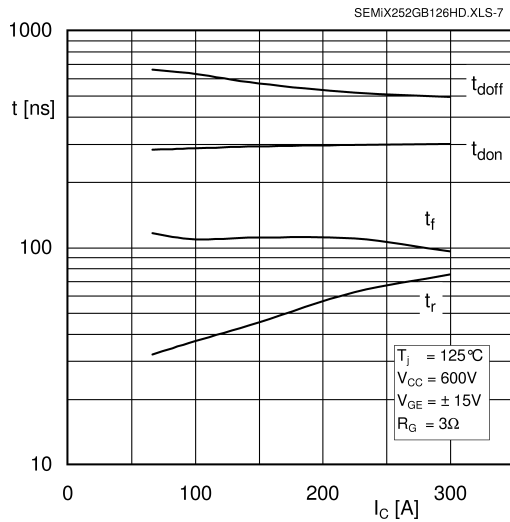

SEMiX252GB126HDs

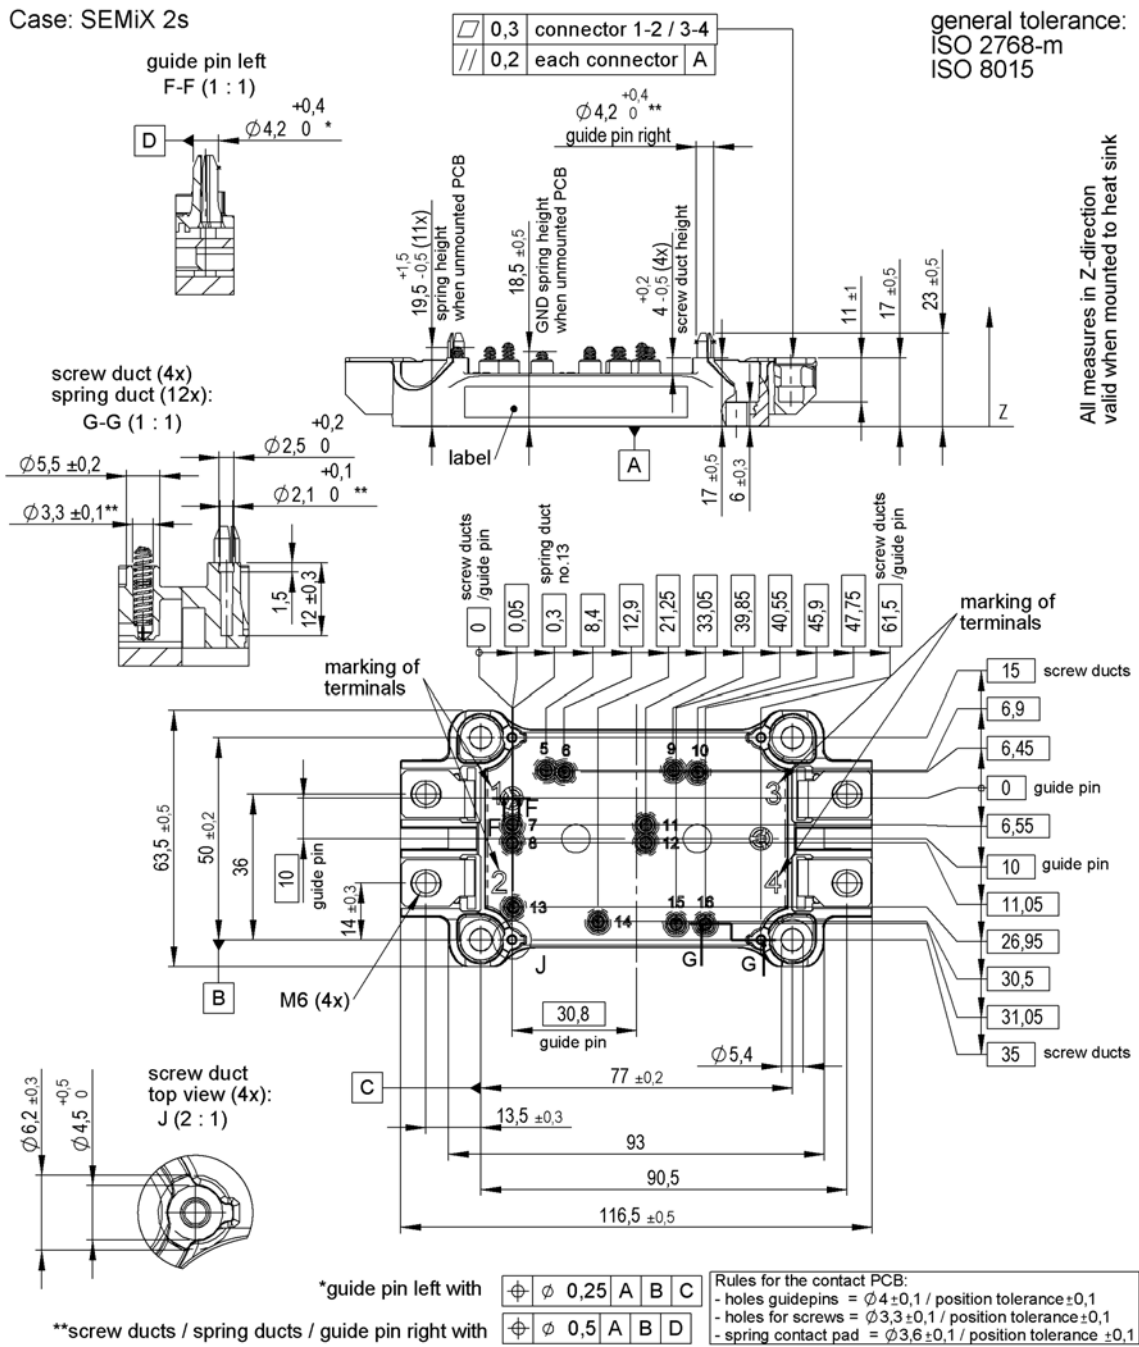

SEMiX 2s

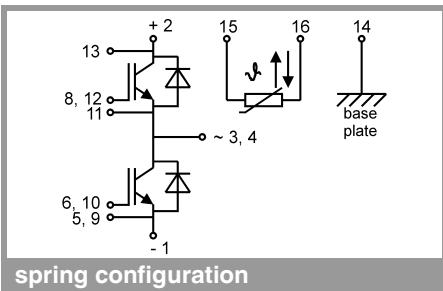

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.