

GLC50 Commercial/GLM50 Medical 50 Watt Output Global Performance Switchers



SPECIFICATIONS:

Ac Input

90-264 Vac, 47-63 Hz single phase.

Input Current

Maximum input current at 120 Vac, 60 Hz with full rated output load: 1.5 A

Hold-Up Time

15 ms minimum from loss of ac input at full load, nominal line (115 Vac).

Output Power

50 W continuous, 60 W peak. Peak ratings are for 60 s maximum duration, 10% duty cycle. During peak load condition, output regulation may exceed total regulation limits.

Output Regulation

To maintain specified regulation on multi-output models, output #1 load power must be at least 1/5th of, and not greater than 5 times output #2 load power.

Overload Protection

Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit on outputs 1 & 2; foldback type on output 3. Recovery after fault is automatic. See output ratings chart for additional notes or conditions.

Efficiency

70-85% at full rated load, nominal input voltage, depending on model and load distribution.

Minimum Load

Operating without minimum load will not degrade reliability, but regulation may be affected. Multiple output models require 20% minimum load on V1 for proper regulation. Single models require 5% minimum load.


Input Protection

Internal ac fuse provided. Designed to blow only if a catastrophic failure occurs in the unit—fuse does not blow on overload or short circuit.

Inrush Current

Inrush is limited by internal thermistors. Inrush at 240 Vac, averaged over the first ac half-cycle under cold start conditions will not exceed 37 A.

FEATURES:

- Cost-effective power source
- Universal input 90-264 Vac
- 2-year warranty
- Compact (4.25" x 2.50" x 1.25"); meets 1U applications)
- Overload and overvoltage protection
- Conducted EMI exceeds FCC Class B and CISPR 22 Class B (Commercial models) and CISPR 11 Class B (Medical models)
- [Commercial UL1950, CSA22.2 No. 950 and IEC 950, EN60950 approvals](#)
- [Medical UL2601, CSA22.2 No. 601, IEC601-1, EN60601-1](#)
-  marked to LVD

Temperature Coefficient

0.03%/°C typical on all outputs.

Output Noise

0.5% rms, 1% pk-pk, 20 MHz bandwidth, differential mode. Measured with noise probe directly across output terminals of the power supply.

Transient Response

500 μ s typical response time for return to within 0.5% of final value for a 50% load step change. $\Delta i/\Delta t < 0.2$ A/ μ s. Maximum voltage deviation is 3.5%. Startup/shutdown overshoot less than 3%.

Voltage Adjustment

Built-in potentiometer adjusts V1 \pm 5%.

EMI/EMC Compliance

All models include built-in EMI filtering to meet the following emissions requirements:

| EMI SPECIFICATIONS | COMPLIANCE LEVEL |
|-------------------------|-------------------------------------|
| Conducted Emissions GLC | EN55022 Class B; FCC Class B |
| Conducted Emissions GLM | EN55011 Class B; FCC Class B |
| Static Discharge | EN61000-4-2, 6 kV contact, 8 kV air |
| RF Field Susceptibility | EN61000-4-3, 3 V/meter |
| Fast Transients/Bursts | EN61000-4-4, 2 kV, 5 kHz |
| Surge Susceptibility | EN61000-4-5, 1 kV diff., 2 kV com. |

Commercial Leakage Current

160 μ A 254 Vac @ 60 Hz input (with no deviations).

Commercial Safety

All GLC models are approved to UL1950, CSA22.2 No. 234 Level 3, IEC950 and EN60950.

Medical Leakage Current

100 μ A 264 Vac @ 60 Hz input (normal conditions).

Medical Safety

All GLM models are approved to UL2601, CSA22.2 No. 601, IEC601-1 and EN60601-1.



GLC50 Commercial/GLM50 Medical 50 Watt Multiple Output

| Commercial Model | Medical Model | Output No. | Output | Current | Minimum Load (B) | OVP Setpoint | Noise P-P | Total Regulation (A) | |
|------------------|---------------|------------|---------|---------|------------------|--------------|-----------|----------------------|-----------|
| GLC50A | GLM50A | 1 | +5.05 V | 4 A | 0.8 A | 6.2 ± 0.6 V | 50 mV | 2% | |
| | | 2 | +12 V | 2.5 A | | | 120 mV | | +10%, -5% |
| | | 3 | -12 V | 0.2 A | | | 120 mV | | |
| GLC50B | GLM50B | 1 | + 5.1 V | 4 A | 0.8 A | 6.2 ± 0.6 V | 50 mV | 2% | |
| | | 2 | +15 V | 2.5 A | | | 150 mV | | +10%, -5% |
| | | 3 | -15 V | 0.2 A | | | 150 mV | | |
| GLC50D | GLM50D | 1 | +5.1 V | 4 A | 0.8 A | 6.2 ± 0.6 V | 50 mV | 2% | |
| | | 2 | +24 V | 1.5 A | | | 240 mV | | +10%, -5% |
| | | 3 | -12 V | 0.2 A | | | 120 mV | | |
| GLC50G | GLM50G | 1 | +3.3 V | 4 A | 0.8 A | 4.2 ± 0.6 V | 33 mV | 2% | |
| | | 2 | +12 V | 2.5 A | | | 120 mV | | +10%, -5% |
| | | 3 | -12 V | 0.2 A | | | 120 mV | | |
| GLC50-3.3 | GLM50-3.3 | 1 | 3.3 V | 8 A | 0 | 4.2 ± 0.6 V | 66 mV | 2% | |
| GLC50-5 | GLM50-5 | 1 | 5.1 V | 8 A | 0 | 6.2 ± 0.6 V | 75 mV | 2% | |
| GLC50-12 | GLM50-12 | 1 | 12 V | 4.2 A | 0 | 14 ± 1.1 V | 120 mV | 2% | |
| GLC50-15 | GLM50-15 | 1 | 15 V | 3.3 A | 0 | 18.5 ± 1.5 V | 150 mV | 2% | |
| GLC50-24 | GLM50-24 | 1 | 24 V | 2.1 A | 0 | 28 ± 2.5 V | 240 mV | 2% | |
| GLC50-28 | GLM50-28 | 1 | 28 V | 1.8 A | 0 | 34.5 ± 2.8 V | 280 mV | 2% | |
| GLC50-48 | GLM50-48 | 1 | 48 V | 1.1 A | 0 | 54 ± 3.0 V | 480 mV | 2% | |

A. Total regulation is defined as the maximum deviation from the nominal voltage for all steady-state conditions of initial voltage setting, input line voltage and output load.
 B. To maintain specified regulation on multi-output models, output #1 load power must be at least 1/5th of, and not greater than 5 times output #2 load power.

GLC50/GLM50 MECHANICAL SPECIFICATIONS

INPUT J1:

AMP P/N 640445-3, 0.156 CTR 0.045
 SQUARE PIN HEADER
 PIN 3) AC NEUTRAL
 PIN 2) NO PIN
 PIN 1) AC LINE

OUTPUT J2:

AMP P/N 640445-6, 0.156 CTR 0.045
 SQUARE PIN HEADER
 MULTIPLE OUTPUT SINGLE OUTPUT
 PIN 1) OUTPUT #2 PIN 1-3) OUTPUT
 PIN 2) OUTPUT #1 PIN 4-6) RETURN
 PIN 3) OUTPUT #1
 PIN 4) COMMON
 PIN 5) COMMON
 PIN 6) OUTPUT #3


MATING CONNECTORS: AMP P/N

| | HOUSING | CONTACTS |
|--------|----------|----------|
| INPUT | 640250-3 | 770476-1 |
| OUTPUT | 640250-6 | 770476-1 |

NOTE: 5A MAXIMUM RECOMMENDED CURRENT PER CONNECTOR PIN

WEIGHT 5 OZ. [0.142 KG]

TOLERANCES: X.XX=0.030 [0.76mm]
 X.XXX=0.010 [0.25mm]

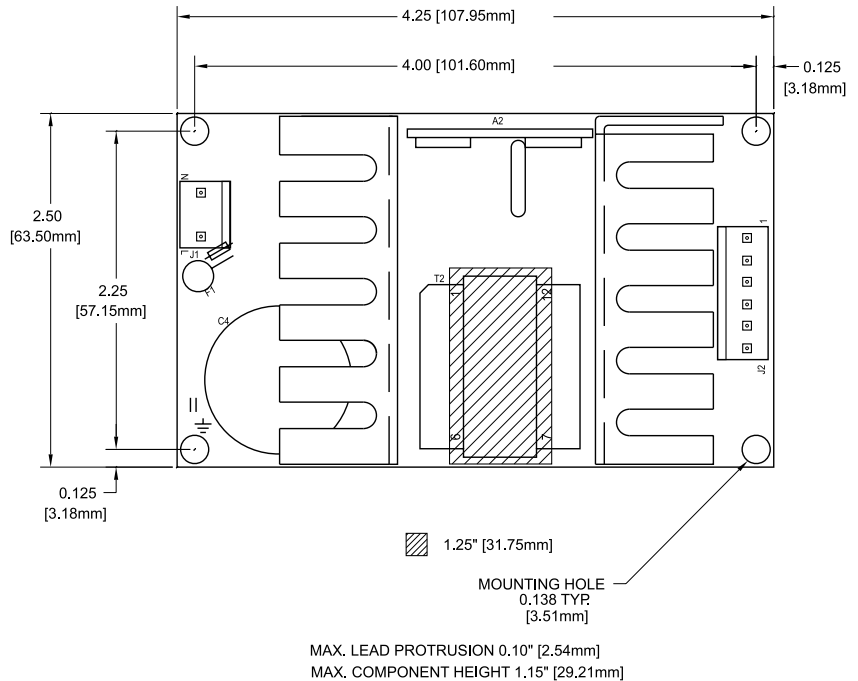

| Environmental Specification | Operating | Non-operating |
|-----------------------------|---|---|
| Temperature (A) | 0 to 50°C | -40 to +85°C |
| Humidity (A) | 0 to 95% RH | 0 to 95% RH |
| Shock (B) | 20 g _{pk} | 40 g _{pk} |
| Altitude | -500 to 10,000 ft | -500 to 40,000 ft |
| Vibration (C) | 1.5 g _{rms} , 0.003 g ² /Hz | 5 g _{rms} , 0.026 g ² /Hz |

- A. Units should be allowed to warm up/operate under non-condensing conditions before application of power. derate output current and total output power by 2.5% per °C above 50°C.
 B. Random vibration—10 to 2000Hz, 6dB/octave roll-off from 350 to 2000Hz, 3 orthogonal axes. Tested for 10 min./axis operating and 1 hr./axis non-operating.
 C. Shock testing—half-sinusoidal, 10 ± 3 ms duration, ± direction, 3 orthogonal axes, total 6 shocks.



Condor D.C. Power Supplies, Inc., 2311 Statham Parkway, Oxnard, CA 93033
 800-235-5929 • 805-486-4565 • FAX 805-487-8911 • www.condorpower.com