




Inforce 6309L™

Micro SBC Based on the Qualcomm® Snapdragon™ 410E Processor

The Inforce 6309L micro SBC is a cost-optimized version of the Inforce 6309 based on the powerful 64-bit Snapdragon 410E processor. The credit card sized (54mm x 85mm) micro SBC is an application-ready platform with the essential interfaces suitable for various IoT embedded markets. It delivers a rich set of I/Os and features including dual MIPI-CSI cameras and HDMI display.

The Inforce 6309L micro SBC meets challenging requirements with its high performance, multimedia features, low power consumption, connectivity and comprehensive support for an upstream Linux kernel (Linaro), Android OS including device drivers for embedded applications such as:


- Industrial automation
- Internet-of-Everything (IoE) devices
- Digital Signage, Smart Infrastructure, Retail

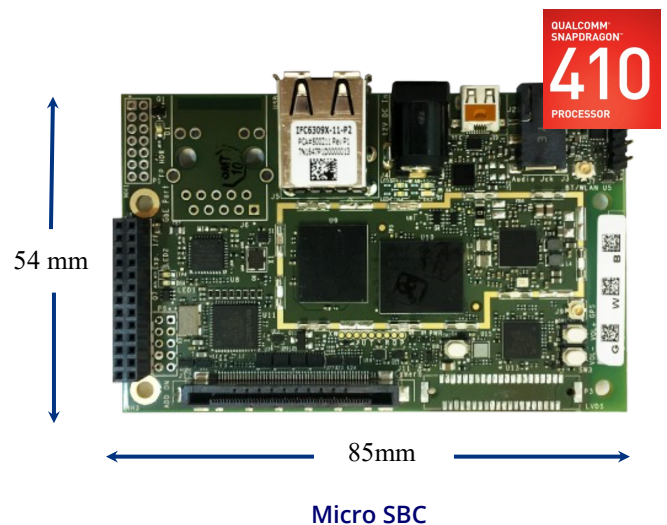


Micro SBC

Processing, Power and Performance

- Qualcomm® Snapdragon™ 410E processor (APQ8016 SoC)
 - Quad-core ARM® Cortex® A53 64-bit CPU @1.2GHz each, ARMv8-A ISA compliant
 - Adreno™ 306 GPU with support for OpenGL ES 3.0, DirectX, and OpenCL
 - Hexagon™ QDSP6 @700MHz for ultra-low power audio and computer vision processing
 - Integrated ISP with support for 1.5GP/s throughput
- 1GB LPDDR3 RAM @533MHz + 8GB eMMC (eMCP package)
- MicroSD card connector
- 802.11 b/g/n 2.4GHz WiFi, BT 4.1 LE, GPS
- Supports dual-cameras (13MP total) on MIPI-CSI
- uHDMI output for HD1080p @30fps video and HD audio

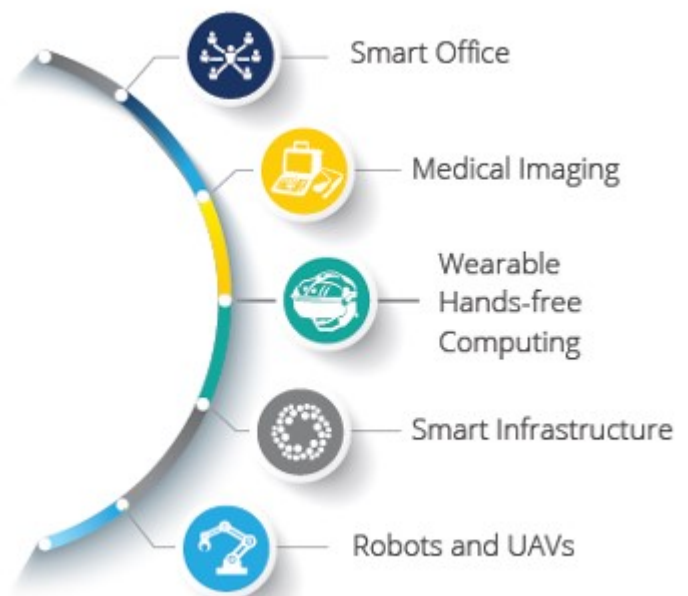

Broad Application Space

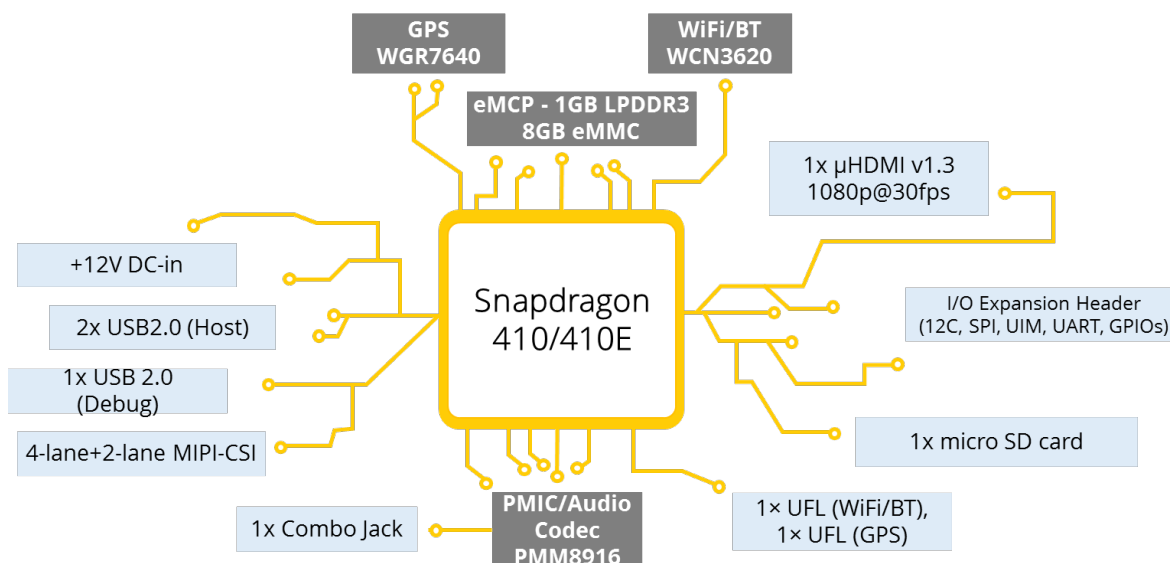

Additional Technical Specifications

Video, Audio and I/O Interfaces

- µHDMI Rev1.3a for 1080p30 HD
- Dual MIPI-CSI2 (4/2-lanes)
- Combo-jack for headphone/Mic-in
- Support for 720p Miracast™
- H.264 playback and capture @1080p
- H.265 playback @1080p
- 26-pin I/O expansion header
- External antenna connectors
- 2x USB 2.0
- 1x USB 2.0 OTG
- 1x I2C
- 1x SPI
- 1x I2S
- 2x UART
- 20x GPIO

Power, Mechanical and Environmental

- Power: +12V DC Input Socket (1.5A typ.)
- Dimensions: 54mm x 85mm (Micro SBC)
- Operating Temp: 0°C to +55°C
- Relative Humidity: 5 to 95% non-condensing
- RoHS and WEEE compliant

Ordering Info

Part Number	Description	Availability
IFC6309L-00-P1	Micro SBC (Android/Board Only)	Off-the-Shelf
IFC6309L-10-P1	Micro SBC (Linux /Board Only)	Off-the-Shelf

*Board ships with RTC

Software

- Choice of Android Lollipop/Linaro Ubuntu Linux board support packages (BSP)/OS pre-loaded

Inforce — Embedded. Connected. Aware.

Inforce Computing® is a supplier of application-ready embedded hardware platforms in eco-aware, low-profile footprints, available off-the-shelf to serve growing markets enabled by the next generation of connected devices. At Inforce, we are inspired by the inflection point in mobile and wireless technologies which is spawning innovative devices, content, and services. Together with silicon, software, and system partners, Inforce is pioneering products with an optimized delivery model for medical imaging, smart office, hands-free computing, and robotics.



Global Sales & Support Inforce Computing Inc. 48820 Kato Road Ste 600B, Fremont, CA 94538 USA
Phone: (510) 683-9999 | sales@inforcecomputing.com
<http://www.inforcecomputing.com>

© 2016 Inforce Computing, Inc. All rights reserved. All other trademarks and product information are the property of their respective owners.