


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C'K'D'
0C	25/10/07	PLATING MODIFICATION IN ACCORDING TO 1063603	M.R.	BS 499

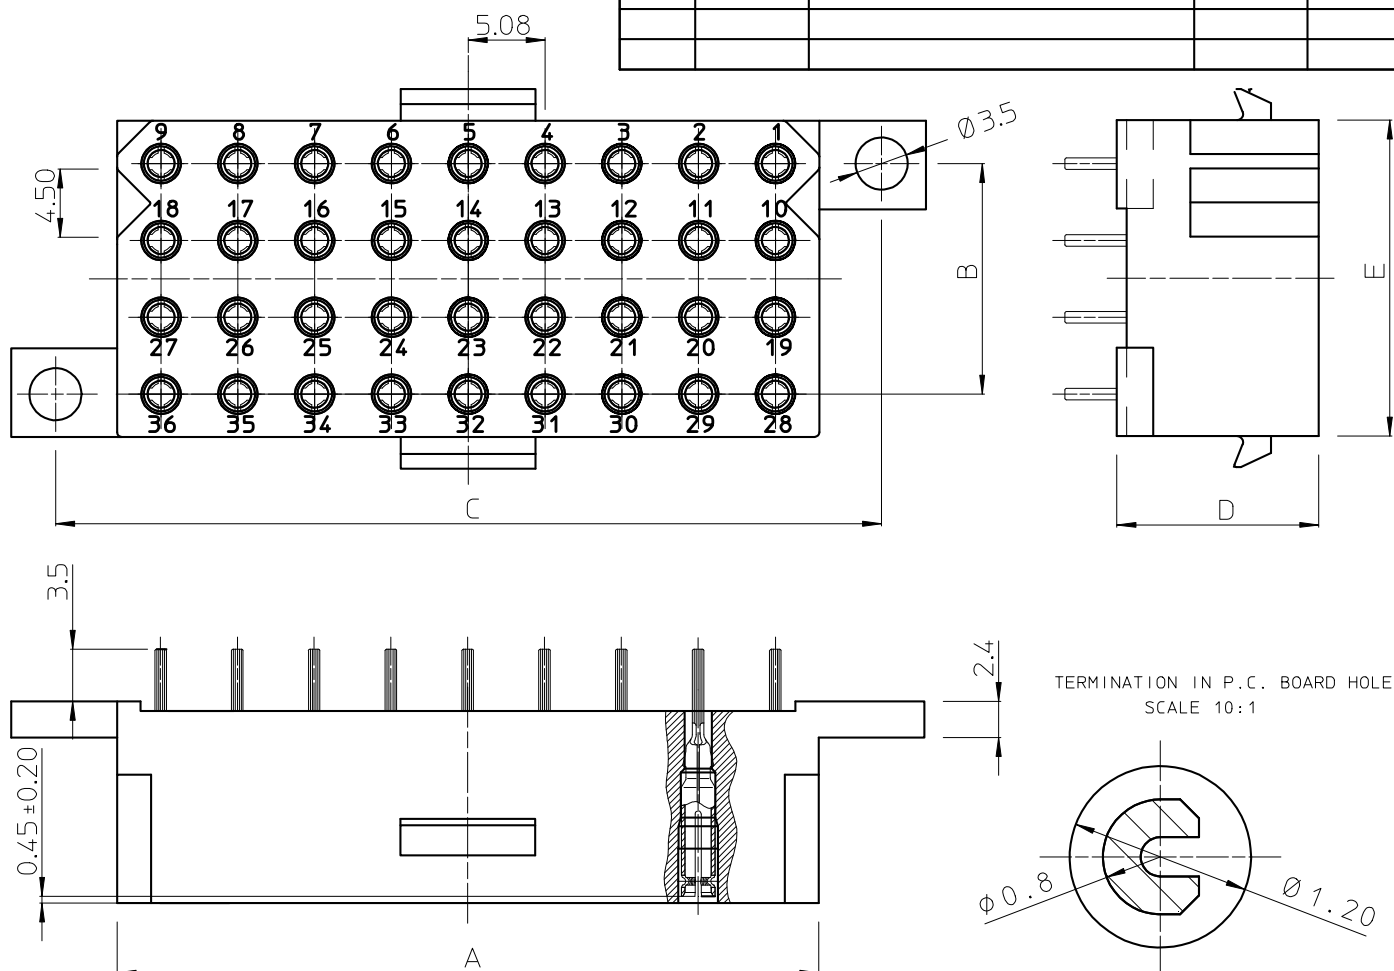

CAT.NR.	A	B	C	D	E
SMS2SE3**	10.9	0	19.1	13.2	5.9
SMS36SE3**	46.5	15.2	54.6	13.2	21.2

PERFORMANCE CHARACTERISTICS :

OPERATING TEMPERATURE	: -55°C TO 125°C
INSULATING RESISTANCE	: 5000 MΩ MIN.
TEST POTENTIAL	: 2000 VAC
CURRENT RATING	: 5 AMP
CONTACT RESISTANCE	: 6 mΩ MAX.

MATERIAL :

HOUSING : GLASS REINFORCED POLYESTER UL94-V0, BLACK

CONTACTS : STAMPED AND FORMED HIGH CONDUCTIVE CU-ALLOY

PLATING (**): K9 : GOLD IN CONTACT AREA 0.4 6 MIN.,

SN ON TERMINATION

T : S_n ALL OVER.

NOTES :

CONNECTOR SUPPLIED FULLY LOADED.

MATING PARTS : SMS--P1 (WITHOUT CABLE HOOD)

SMS--PDH1 (WITH INTEGRATED CABLE HOOD)

DRILLING HOLE PATTERN : SEE DRAWING BS,C ,201713,000

GEN. ST.	01		02		03		04		05		06		07		08		0D		50		60		70		80		90				
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR. DRAFT CHECKED PROD. MGR. PR.ENG.MGR. PR.MGT.MGR.	DATE 11-01-96	SIGN. S.Van Dessel	STAMPED FEMALE QIKMATE STRAIGHT RECEPTACLE CAT. No. SMS--SE3*	 SOURIAU Connection Technology	SOURIAU Route Nationale 23 72470 CHAMPAGNE	SCALE 2:1
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	REFERENCES / REFERENTIES			BS, A, 201122, 015, 00 DRAWING NR. CUSTOMER DRAWING			
ALL DIMENSIONS IN MM 				NOT EXPORT CONTROLLED			
ALLE AFMETINGEN IN MM							