
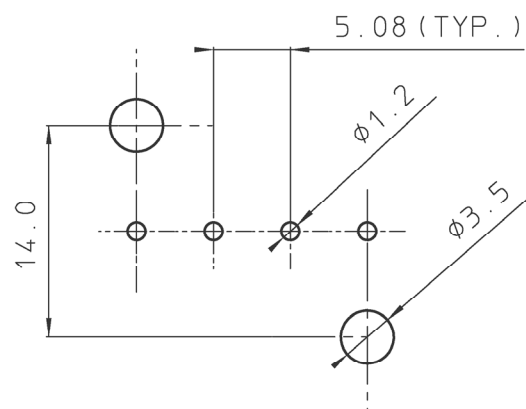
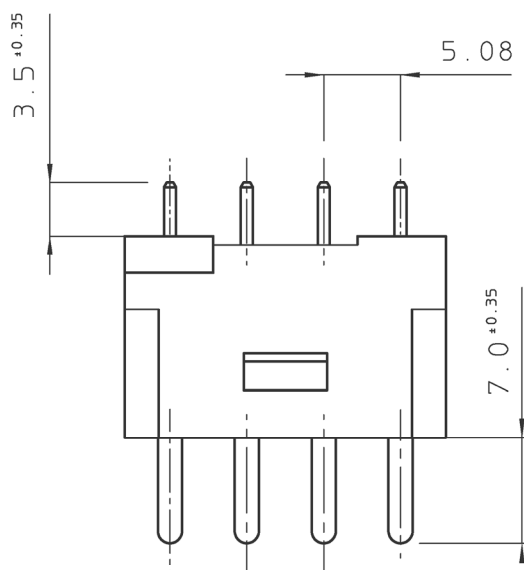
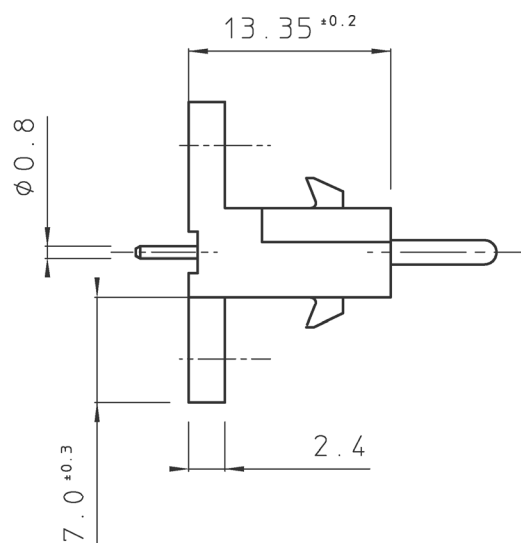


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO JS IN CASE OF NO USAGE

BS,A , 202363,003,00

REV.	DATE	DESCRIPTION	BY	C'K'D'
00	18.08.97	REDRAWN FROM DRAWING BSA 062110 SHEET 3	S.V.D.	

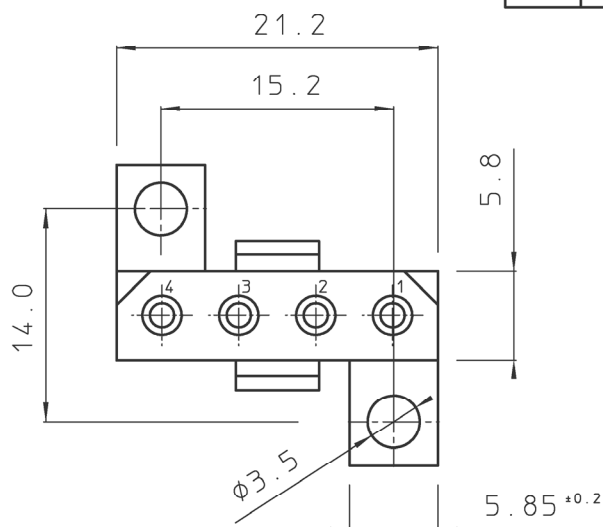

DRILLING HOLE PATTERN

MATERIAL :

BODY : NYLON, UL94V-2, COLOUR : BLACK

CONTACTS : BRASS, GOLD OR TIN PLATED

PERFORMANCE CHARACTERISTICS :

OPERATING TEMPERATURE : -55°C TO 105°C

INSULATING RESISTANCE : 5000 M Ω MIN.

TEST POTENTIAL : 2000 VAC

NOTES :


1. CONNECTOR SUPPLIED FULLY LOADED WITH MACHINED PIN CONTACTS.

GOLD PLATED : SMS4GE4 ; GOLD FLASH : SMS4GE4J ; TIN PLATED : SMS4GE4T

2. MATING PART SMS4P1 PLUG

3. PC-BOARD THICKNESS : 2.4 MM

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90		
INT. ST.	10 11	12 13	14 18	20 31	32 33	34 38	39 40	42 43	44 45	46 48	56 70	72 73	75 76	81 82	83 84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR.	DATE	SIGN.	SMS QIKMATE STRAIGHT MALE REC. WITH MACH. CONT.	
	DRAFT	18-08-97	S. Van Dessel	CAT. No. SMS4GE4-	
	CHECKED				
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR.			 SOURIAU Connection Technology	SCALE
	PR. ENG. MGR.				
ALL DIMENSIONS IN MM	PR. MGT. MGR.			72470 CHAMPAGNE	2 / 1
	REFERENCES / REFERENTIES				
ALLE AFMETINGEN IN MM				BS, A , 202363-003-00	
				DRAWING NR.	CUSTOMER DRAWING