



DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY. NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

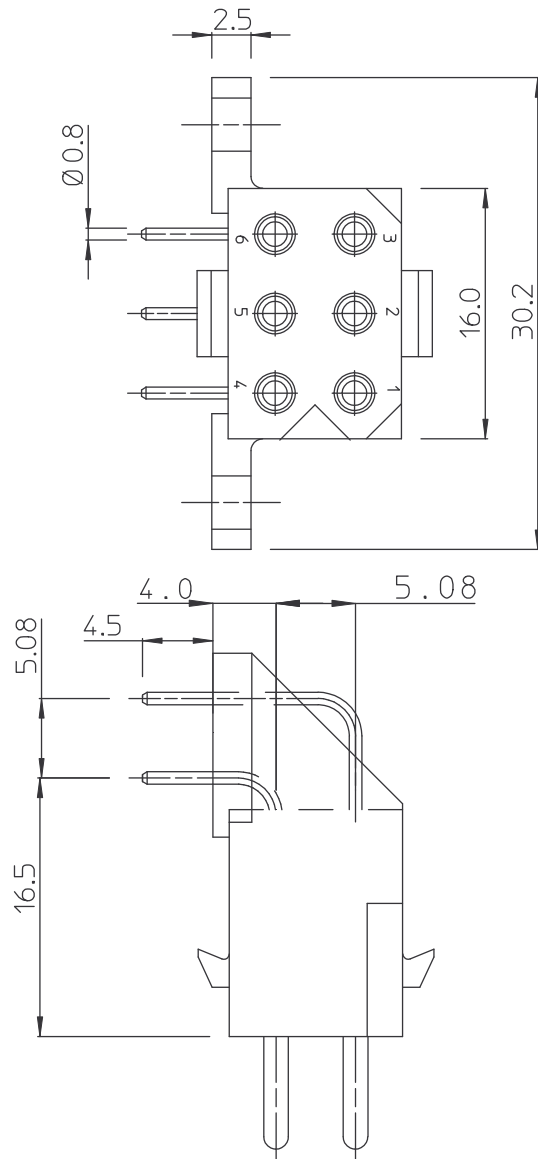

REV.	DATE	DESCRIPTION	BY	C'K'D'

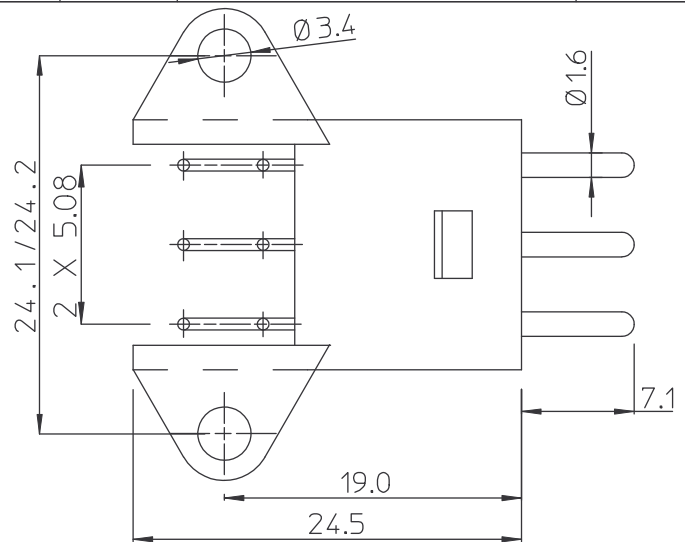

MATERIAL :

HOUSING : GLASS FILLED POLYESTER UL94-V0, BLACK

CONTACTS : BRASS, GOLD OR TIN PLATED.

PERFORMANCE CHARACTERISTICS :

OPERATING TEMPERATURE : -55°C TO 125°C

INSULATING RESISTANCE : 5000 MΩ MIN.

TEST POTENTIAL : 2000 VAC

NOTES :

- CONNECTOR SUPPLIED FULLY LOADED WITH MACHINED PIN CONTACTS.
GOLD PLATED : SMS6GE6 ; GOLD FLASH : SMS6GE6J ; TIN PLATED : SMS6GE6T.
- MATING PARTS : SMS--P1 (WITHOUT CABLE HOOD)
SMS--PDH1 (WITH INTEGRATED CABLE HOOD)
- DRILLING HOLE PATTERN : SEE DRAWING BS,C ,201713,000
- CONNECTOR MUST BE MOUNTED ON THE EDGE OF THE PRINTED CIRCUIT BOARD.

RELEASED FOR PRODUCTION

GEN. ST.	01		02		03		04		05		06		07		08		0D		50		60		70		80		90				
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR.		DATE		SIGN.		SMS QIKMATE RIGHT ANGLE MALE REC. E MACH. CONT.																
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	DRAFT		18-08-97		S.Van Dessel		CAT. No . SMS6GE6 -																
	CHECKED						 SOURIAU Connection Technology SOURIAU Route Nationale 23 72470 CHAMPAGNE																
	PROD. MGR.																						
ALL DIMENSIONS IN MM  	PR.ENG.MGR.						SCALE 2 : 1																
	PR.MGT.MGR.																						
REFERENCES / REFERENTIES														BS , A , 202365 , 002 , 00 DRAWING NR. CUSTOMER DRAWING									
ALLE AFMETINGEN IN MM																							