

**Features:**

- Ideal for crossovers or jumpers on circuit boards with auto-insertion capability
- High current rating
- Cut and formed product is available on select sizes, contact factory for details
- RoHS compliant, lead-free and halogen-free




Electrical Specifications				
Part Number (zero Ohm)	Current Rating (Amps) @ 70°C	Dielectric Withstanding Voltage	Marking	Resistance
CD18	2A	300V	Single black band	0.01Ω or less
CD14	3A	500V		
CD12	4A	600V		


Operating Temperature Range: -55°C to +155°C

Mechanical Specifications					
Type/Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Unit
CD18	0.126 ± 0.008	0.071 ± 0.008	1.102 ± 0.079	0.018 ± 0.0008	inches
	3.20 ± 0.20	1.80 ± 0.20	28.00 ± 2.00	0.45 ± 0.02	mm
CD14	0.236 ± 0.012	0.091 ± 0.008	1.102 ± 0.079	0.022 ± 0.0012	inches
	6.00 ± 0.30	2.30 ± 0.20	28.00 ± 2.00	0.55 ± 0.03	mm
CD12	0.354 ± 0.020	0.126 ± 0.020	1.024 ± 0.079	0.026 ± 0.0012	inches
	9.00 ± 0.50	3.20 ± 0.50	26.00 ± 2.00	0.65 ± 0.03	mm

**Power Derating Curve:**

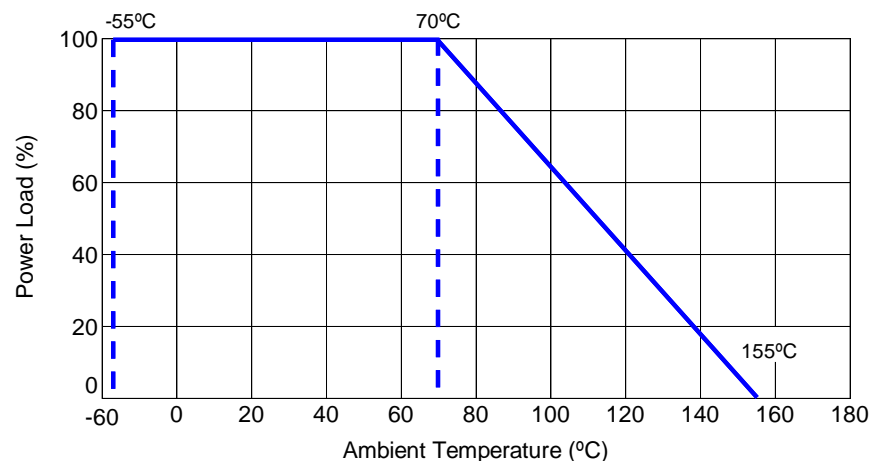

### Packaging Specifications

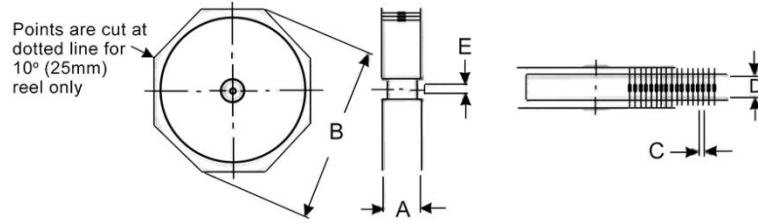

Series	Size	A max <sup>(1)</sup>	B max	C	D <sup>(2)</sup>	Tape	Unit
CD	18	2.508 63.70	13.504 343.00	0.197 ± 0.020 5.00 ± 0.50	2.063 ± 0.079 52.40 ± 2.00	0.250 6.35	inches mm
	14	2.618 66.50	13.504 343.00	0.197 ± 0.020 5.00 ± 0.50	2.063 ± 0.079 52.40 ± 2.00	0.250 6.35	inches mm
	12	2.736 69.50	13.504 343.00	0.197 ± 0.020 5.00 ± 0.50	2.063 ± 0.079 52.40 ± 2.00	0.250 6.35	inches mm

Dimension "E": This is a non-critical dimension that does not have a tolerance in the standard.

Range of diameters is from 0.547 inches (13.90 mm) to 1.500 inches (38.10 mm).

- (1) Reference value only. The "A" dimension shall be governed by the overall length of the taped component. The distance between flanges shall be 0.059 inches (1.50 mm) to 0.315 (8.00 mm) greater than the overall component.
- (2) The given dimension "D" expresses the standard width spacing. A 26mm narrow spacing is available as option "N" packaging code.

### RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

### RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
CD	Axial Leaded Zero Ohm Resistor	Axial	YES	100% Matte Sn	Jan-04	04/01

### "Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

## Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

## Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

## How to Order

1	2	3	4	5	6	7	8	9	10
C	D	1	4	Z	T	0	R	0	0

Product Series		Power Rating		Tolerance		Packaging				Resistance Value
Code	Description	Code	Power	Code	Tol	Code	Description	Size	Quantity	
CD	Zero Ohm - Axial Lead	18	2A	Z	< 0.01 ohm	T	Tape and Reel	12	2,500	CD = Zero Ohm - Axial Lead PCF = Zero Ohm - Radial Lead
PCF	Panasert CD 1/4	14	3A					14, 18	5,000	
		12	4A			A	Ammo	12	2,000	
								14, 18	5,000	
						B	Bulk	12, 14, 18	1,000	